

Last information update: May 2018



wall-washer luminaire - Ø 96 mm - warm white - frame

Product code

N122

Technical description


Recessed round wall-washer luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours and finished with a protective anti-scratch layer to create a vertical downward beam of light. Die-cast aluminium body and passive dissipation system. Product complete with C.O.B. LED lamp in warm white colour tone 3000K.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

Dimension (mm)

Ø109x95



Colour

White/Aluminium (39)

Weight (Kg)

0.65

Mounting

ceiling recessed

Wiring

product complete with electronic components

Complies with EN60598-1 and pertinent regulations



Product configuration: N122

Product characteristics

Total lighting output [Lm]: 795
 Total power [W]: 11.6
 Luminous efficacy [Lm/W]: 68.5
 Life Time: 50,000h - L80 - B10 (Ta 25 °C)


Total luminous flux at or above an angle of 90° [Lm]: 0
 Emergency luminous flux [Lm]: /
 Voltage [V]: -
 Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 53
 Lamp code: LED
 ZVEI Code: LED
 Nominal power [W]: 9.3
 Nominal luminous [Lm]: 1500
 Lamp maximum intensity [cd]: /
 Beam angle [°]: /

Number of lamps for optical assembly: 1
 Socket: /
 Ballast losses [W]: 2.3
 Colour temperature [K]: 3000
 CRI: 80
 Wavelength [Nm]: /
 MacAdam Step: 2

Polar

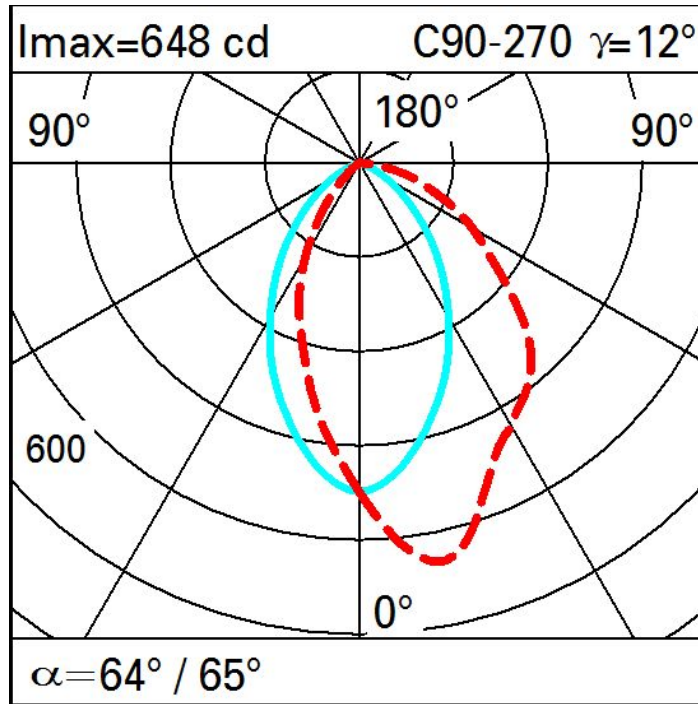

Illuminances

Lux		Wall distance = 1m												
3														
		0.3	0.9	3	15	61	116	61	15	3	0.9	0.3		
2		1	4	11	33	84	138	84	33	11	4	1		
		3	6	14	34	65	83	65	34	14	6	3		
1		3	7	14	26	40	47	40	26	14	7	3		
		4	7	12	18	25	29	25	18	12	7	4		
0														
	m	-2	-1	0	1	2	3							