

Last information update: May 2018

**wall-washer luminaire - Ø 125 mm - warm white - minimal****Product code**

N243

**Technical description**

Recessed round wall-washer luminaire designed to use a LED lamp with C.O.B. technology. Version without rim for mounting flush with ceiling. Reflector vacuum-metallised with aluminium vapours and finished with a protective anti-scratch layer to create a vertical downward beam of light. Die-cast aluminium body and passive dissipation system. Product complete with C.O.B. LED lamp in warm white colour tone 3000K (CRI 90).

**Installation**

Installation flush with the ceiling is for false ceilings 12.5 mm thick

**Dimension (mm)**

Ø123x111

**Colour**

Aluminium (12)

**Weight (Kg)**

1.08

**Mounting**

ceiling recessed

**Wiring**

product complete with DALI components

Complies with EN60598-1 and pertinent regulations




IP20



IP43

On the visible part of the product once installed

**Product configuration: N243****Product characteristics**

Total lighting output [Lm]: 1735  
 Total power [W]: 31.7  
 Luminous efficacy [Lm/W]: 54.7  
 Life Time: 50,000h - L80 - B10 (Ta 25 °C)


Total luminous flux at or above an angle of 90° [Lm]: 0  
 Emergency luminous flux [Lm]: /  
 Voltage [V]: -  
 Number of optical assemblies: 1

**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 62  
 Lamp code: LED  
 ZVEI Code: LED  
 Nominal power [W]: 29  
 Nominal luminous [Lm]: 2800  
 Lamp maximum intensity [cd]: /  
 Beam angle [°]: /

Number of lamps for optical assembly: 1  
 Socket: /  
 Ballast losses [W]: 2.7  
 Colour temperature [K]: 3000  
 CRI: 90  
 Wavelength [Nm]: /  
 MacAdam Step: 2

Polar

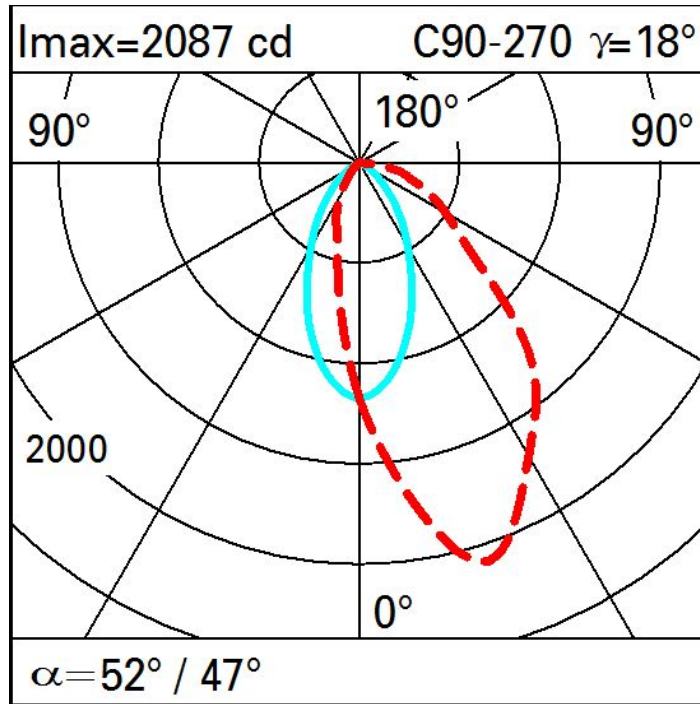

Illuminances

