

Last information update: May 2018

**medium body - warm white - white flood optic**

**Product code**  
N996

**Technical description**

Adjustable spotlight with adapter for installation on electrified track for a linear PCB LED lamp with a Warm White (3000K) tone. Product complete with super pure anodized aluminium reflector to guarantee wide flood light distribution. Electronic ballast integrated in the body. Die-cast aluminium optical assembly. Rotates 360° about the vertical axis and tilts 90° relative to the horizontal plane. Passive heat dissipation. Option of installing a range of outdoor accessories including an anti-glare and an asymmetric screen.

**Installation**

On an electrified track or base

**Dimension (mm)**

170x126

**Colour**

Black (04) | Black/White (47)

**Weight (Kg)**

1.35

**Mounting**

three circuit track|ceiling surface

**Wiring**

Product complete with electronic components

Complies with EN60598-1 and pertinent regulations

IP20 IP40 for optical assembly

**Product configuration: N996****Product characteristics**

Total lighting output [Lm]: 2249.8  
Total power [W]: 38.6  
Luminous efficacy [Lm/W]: 58.3  
Life Time: 50,000h - L80 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 0  
Emergency luminous flux [Lm]: /  
Voltage [V]: -  
Number of optical assemblies: 1

**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 90  
Lamp code: LED  
ZVEI Code: LED  
Nominal power [W]: 33  
Nominal luminous [Lm]: 2500  
Lamp maximum intensity [cd]: /  
Beam angle [°]: 80° / 106°

Number of lamps for optical assembly: 1  
Socket: /  
Ballast losses [W]: 5.6  
Colour temperature [K]: 3000  
CRI: 90  
Wavelength [Nm]: /  
MacAdam Step: 2


**Polar**

Imax=1104 cd		C5-185 γ=20°		CIE		Lux				
90°	180°	90°		nL 0.90	h	d1	d2	Em	Emax	
				64-92-99-100-90						
				UGR 25.4-31.4						
				<b>DIN</b>						
				A.51						
				<b>UTE</b>						
				0.90C+0.00T						
				F*1=642						
				F*1+F*2=917						
				F*1+F*2+F*3=991						
					1	1.7	2.7	684	1018	
					2	3.4	5.3	171	255	
					3	5	8	76	113	
					4	6.7	10.6	43	64	
α=80° / 106°										

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	66	58	53	49	57	52	52	47	52
1.0	72	65	60	56	63	59	58	53	59
1.5	80	75	70	67	73	69	68	64	71
2.0	85	80	77	74	79	76	75	71	78
2.5	87	84	81	78	82	80	79	75	83
3.0	89	86	84	82	85	82	81	78	86
4.0	91	89	87	85	87	86	84	81	90
5.0	92	91	89	87	89	87	86	82	92

Luminance curve limit

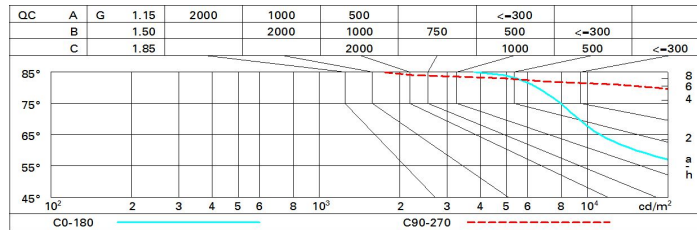

UGR diagram

Corrected UGR values (at 2500 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	24.9	25.8	25.2	26.0	26.3	30.2	31.0	30.5	31.3	31.5
	3H	24.8	25.6	25.2	25.9	26.2	30.2	31.0	30.5	31.3	31.5
	4H	24.8	25.5	25.1	25.8	26.1	30.1	30.9	30.5	31.2	31.5
	6H	24.7	25.4	25.1	25.7	26.1	30.0	30.7	30.4	31.0	31.4
	8H	24.7	25.3	25.1	25.7	26.0	30.0	30.7	30.4	31.0	31.3
	12H	24.7	25.3	25.0	25.6	26.0	30.0	30.6	30.4	30.9	31.3
4H	2H	25.6	26.3	25.9	26.6	26.9	31.3	32.0	31.6	32.3	32.6
	3H	25.6	26.2	25.9	26.5	26.9	31.5	32.1	31.9	32.4	32.8
	4H	25.5	26.1	25.9	26.4	26.8	31.5	32.0	31.9	32.4	32.8
	6H	25.5	25.9	25.9	26.3	26.8	31.4	31.9	31.9	32.3	32.7
	8H	25.4	25.9	25.9	26.3	26.7	31.4	31.8	31.8	32.2	32.7
	12H	25.4	25.8	25.8	26.2	26.7	31.3	31.7	31.8	32.2	32.6
8H	4H	25.7	26.1	26.1	26.5	27.0	31.6	32.0	32.0	32.4	32.9
	6H	25.6	26.0	26.1	26.5	26.9	31.6	31.9	32.0	32.4	32.8
	8H	25.6	25.9	26.1	26.4	26.9	31.5	31.8	32.0	32.3	32.8
	12H	25.6	25.8	26.1	26.3	26.9	31.5	31.8	32.0	32.2	32.8
	12H	25.6	25.8	26.1	26.3	26.9	31.5	31.8	32.0	32.2	32.8
12H	4H	25.7	26.1	26.1	26.5	27.0	31.5	31.9	32.0	32.3	32.8
	6H	25.7	26.0	26.1	26.4	26.9	31.5	31.8	32.0	32.3	32.8
	8H	25.6	25.9	26.1	26.4	26.9	31.5	31.8	32.0	32.3	32.8
Variations with the observer position at spacing:											
S =	1.0H	1.7 / -3.2					0.4 / -0.4				
	1.5H	2.7 / -5.4					0.6 / -1.2				
	2.0H	3.9 / -6.7					1.5 / -1.8				