


Last information update: May 2018

**small body - neutral white - wall washer optic****Product code**

P007

**Technical description**

Adjustable spotlight with adapter for installation on electrified track for a linear PCB LED lamp with a Warm White (3000K) tone. Product complete with super pure anodized aluminium reflector to guarantee wall washer light distribution for vertical downlight wall illumination. Electronic ballast integrated in the body. Die-cast aluminium optical assembly. Rotates 360° about the vertical axis and tilts 90° relative to the horizontal plane. Passive heat dissipation. Option of installing an accessory asymmetric screen.

**Installation**

On an electrified track or base

**Dimension (mm)**

130x110

**Colour**

Black (04) | Black/White (47)

**Weight (Kg)**

0.9

**Mounting**


three circuit track|ceiling surface

**Wiring**

Product complete with electronic components

Complies with EN60598-1 and pertinent regulations

IP20 IP40 for optical assembly

**Product configuration: P007****Product characteristics**

Total lighting output [Lm]: 1050  
Total power [W]: 17.8  
Luminous efficacy [Lm/W]: 59  
Life Time: 50,000h - L80 - B10 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 0  
Emergency luminous flux [Lm]: /  
Voltage [V]: -  
Number of optical assemblies: 1

**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 70  
Lamp code: LED  
ZVEI Code: LED  
Nominal power [W]: 14  
Nominal luminous [Lm]: 1500  
Lamp maximum intensity [cd]: /  
Beam angle [°]: /

Number of lamps for optical assembly: 1  
Socket: /  
Ballast losses [W]: 3.8  
Colour temperature [K]: 4000  
CRI: 80  
Wavelength [Nm]: /  
MacAdam Step: 2

Polar

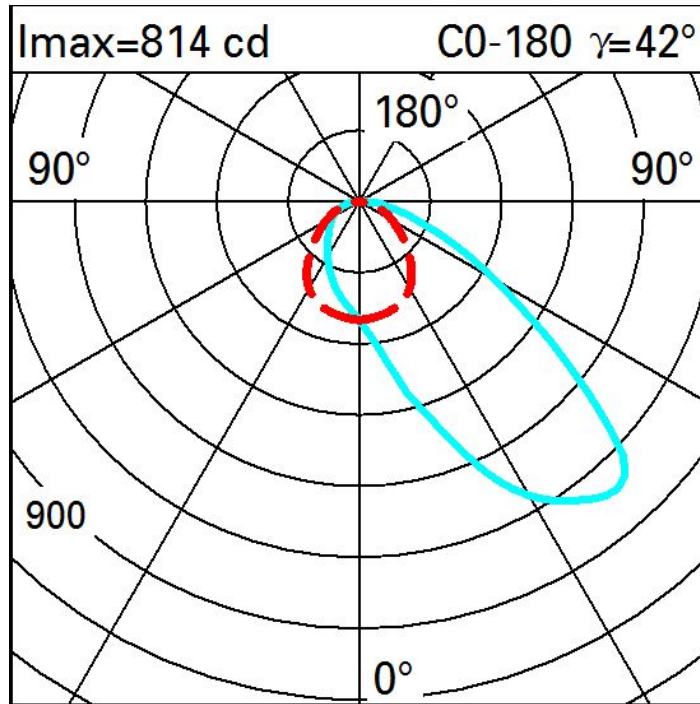

Illuminances

Lux      Wall distance = 1m

3												
	1	3	6	13	28	47	58	36	13	6	3	
2	2	4	7	15	30	53	84	72	34	13	6	
	2	4	7	12	22	35	55	61	44	22	10	
1	2	3	5	9	15	21	30	38	33	24	14	
	2	3	4	7	9	12	17	22	22	19	14	
0												
	m	-2	-1	0	1	2	3					