

Last information update: May 2018

**spotlight- neutral white - 46° optic****Product code**

P071

Technical description

Pendant luminaire equipped with a three-phase adapter for electrified tracks or a base, made of die-cast aluminium and thermoplastic material. The pendant system consists of steel cables L=2000 that provide a simple mechanical anchoring system. Having been rotated and tilted, the luminaire can be locked mechanically in position to ensure efficient light aiming (during maintenance operations too). Mechanical aiming locks both for rotation about the vertical axis and tilting relative to the horizontal plane. Equipped with electronic ballast. Luminaire complete with C.O.B. technology LED unit in neutral white colour 4,000K. Option of installing a flat accessory that can be either an elliptical distribution refractor, a soft lens filter or a louver.

Installation

pendant on an electrified track or special base

Dimension (mm)

Ø116x234

Colour

White (01) | Black (04) | White/Chrome (E4)

Weight (Kg)

1.7

Mounting

three circuit track

Wiring

product complete with electronic components

Complies with EN60598-1 and pertinent regulations

IP20 IP40 for optical assembly

**Product configuration: P071****Product characteristics**

Total lighting output [Lm]: 2477
 Total power [W]: 23.2
 Luminous efficacy [Lm/W]: 106.6
 Life Time: > 50,000h - L80 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 0
 Emergency luminous flux [Lm]: /
 Voltage [V]: -
 Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 80
 Lamp code: LED
 ZVEI Code: LED
 Nominal power [W]: 20
 Nominal luminous [Lm]: 3100
 Lamp maximum intensity [cd]: /
 Beam angle [°]: 42°

Number of lamps for optical assembly: 1
 Socket: /
 Ballast losses [W]: 3.2
 Colour temperature [K]: 4000
 CRI: 80
 Wavelength [Nm]: /
 MacAdam Step: 2


Polar

	CIE		Lux			
	nL 0.80	99-100-100-100-80	h	d	Em	Emax
	UGR <10-<10	DIN A.61	2	1.5	1059	1306
	UTE 0.80A+0.00T	F*1=991	4	3.1	265	327
	F*1+F*2=998	F*1+F*2+F*3=999	6	4.6	118	145
	CIBSE LG3 L<1500 cd/m² at 65°		8	6.1	66	82

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	68	66	63	67	65	65	62	78
1.0	75	72	69	67	71	69	68	66	82
1.5	79	76	74	73	75	74	73	70	88
2.0	81	79	78	77	78	77	76	74	93
2.5	83	81	80	79	80	79	78	76	95
3.0	84	83	82	81	82	81	80	78	97
4.0	85	84	84	83	83	82	81	79	99
5.0	85	85	84	84	84	83	82	80	100

Luminance curve limit

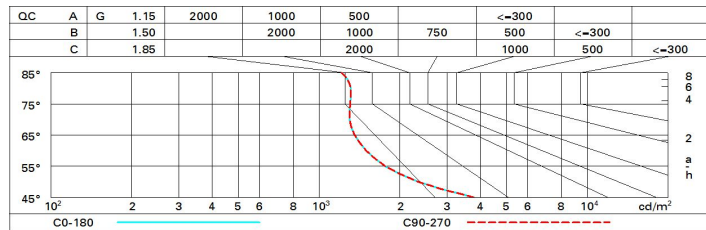

UGR diagram

Corrected UGR values (at 3100 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	8.8	9.4	9.1	9.6	9.9	8.8	9.4	9.1	9.6	9.9
	3H	8.8	9.3	9.1	9.6	9.8	8.7	9.2	9.0	9.5	9.8
	4H	8.8	9.3	9.1	9.6	9.9	8.7	9.1	9.0	9.4	9.7
	6H	8.8	9.2	9.1	9.5	9.9	8.6	9.0	8.9	9.4	9.7
	8H	8.8	9.2	9.1	9.5	9.9	8.6	9.0	8.9	9.3	9.7
12H	8.8	9.2	9.1	9.5	9.9	8.5	8.9	8.9	9.3	9.6	
4H	2H	8.7	9.1	9.0	9.4	9.7	8.8	9.3	9.1	9.6	9.9
	3H	8.7	9.1	9.0	9.4	9.8	8.7	9.1	9.1	9.5	9.8
	4H	8.7	9.0	9.1	9.4	9.8	8.7	9.0	9.1	9.4	9.8
	6H	8.7	9.0	9.1	9.4	9.8	8.6	9.0	9.1	9.4	9.8
	8H	8.7	9.0	9.2	9.4	9.9	8.6	8.9	9.0	9.3	9.7
12H	8.7	9.0	9.2	9.4	9.9	8.6	8.8	9.0	9.3	9.7	
8H	4H	8.6	8.9	9.0	9.3	9.7	8.7	9.0	9.2	9.4	9.9
	6H	8.7	8.9	9.2	9.4	9.8	8.7	9.0	9.2	9.4	9.9
	8H	8.7	8.9	9.2	9.4	9.9	8.7	8.9	9.2	9.4	9.9
	12H	8.7	8.9	9.2	9.4	9.9	8.7	8.9	9.2	9.4	9.9
12H	4H	8.6	8.8	9.0	9.3	9.7	8.7	9.0	9.2	9.4	9.9
	6H	8.7	8.9	9.1	9.3	9.8	8.7	8.9	9.2	9.4	9.9
	8H	8.7	8.9	9.2	9.4	9.9	8.7	8.9	9.2	9.4	9.9
Variations with the observer position at spacing:											
S =	1.0H	5.3 / -4.9				5.3 / -4.9					
	1.5H	8.0 / -5.3				8.0 / -5.3					
	2.0H	10.0 / -5.5				10.0 / -5.5					