


Last information update: May 2018

**10 cell Recessed luminaire - Tunable White - Flood optic****Product code**

P184

**Technical description**

Rectangular 10 optic element recessed miniaturised luminaire. LED lamps with different colour temperatures that allow them to be modulated. This variation is achieved by mixing the emission of 5 x 2700K high CRI LEDs and 5 x 5700K high CRI LEDs. The colour temperature remains uniform and constant even when different size products are used together and with an uneven number of warm and cold LEDs. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised thermoplastic high definition optics - flood beam - set back from the black anti-glare screen. The structure of the optical system prevents a pinpoint effect, allowing precise, circular light distribution and emission with controlled glare. Supplied with an integrated (basic) power system that allows the colour temperature to be varied, without using any extra components, but simply by pressing the buttons (max 4 products). Using the 6170 + M630 codes you can obtain a simple and intuitive DALI programmable solution with touch-screen. There are also other control systems available with different codes for large systems that require specialised technicians for their programming: the MH97 + MH93 + MI02 group can be used for a DALI / KNX programmable solution - the MH97 + MH93 + M618 group can be used to extend the control of the system to remote supports such as tablets and smart phones.

**Installation**

recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 37 x 274

**Dimension (mm)**

281x44x54

**Colour**

White (01) | Black/Black (43) | Black/White (47) | Grey/Black (74)

**Weight (Kg)**

0.8

**Mounting**

wall recessed|ceiling recessed

**Wiring**

Power units included. Various management solutions are available with a separate code. For technical data, properties and connection modes see the instruction sheet.

Complies with EN60598-1 and pertinent regulations



IP20

IP23

On the visible part of the product once installed

**Product configuration: P184****Product characteristics**

Total lighting output [Lm]: 1396.7  
Total power [W]: 26  
Luminous efficacy [Lm/W]: 53.7  
Life Time: 50,000h - L90 - B10 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 0  
Emergency luminous flux [Lm]: /  
Voltage [V]: -  
Number of optical assemblies: 1

**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 80  
Lamp code: LED  
ZVEI Code: LED  
Nominal power [W]: 18  
Nominal luminous [Lm]: 1750  
Lamp maximum intensity [cd]: /  
Beam angle [°]: 30°

Number of lamps for optical assembly: 1  
Socket: /  
Ballast losses [W]: 8  
Colour temperature [K]: /  
CRI: /  
Wavelength [nm]: /  
MacAdam Step: /


Polar

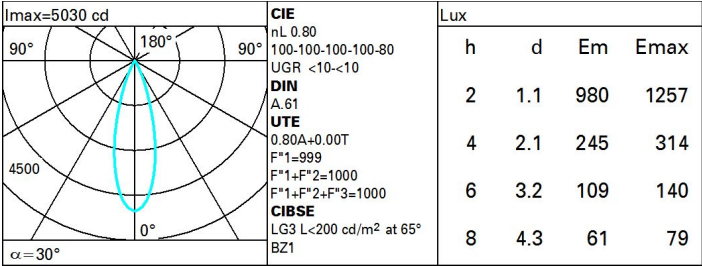

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	68	66	64	68	65	65	63	78
1.0	75	72	70	68	71	69	69	66	83
1.5	79	76	75	73	76	74	73	71	89
2.0	81	80	78	77	78	77	76	74	93
2.5	83	82	80	80	80	79	79	76	96
3.0	84	83	82	81	82	81	80	78	98
4.0	85	84	84	83	83	82	81	79	99
5.0	85	85	84	84	84	83	82	80	100

Luminance curve limit

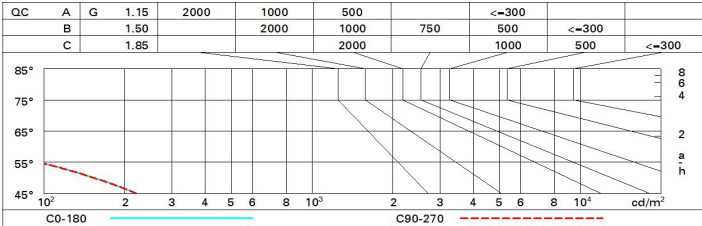

# UGR diagram

Corrected UGR values (at 1750 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	-6.0	-5.5	-5.7	-5.3	-5.0	-6.0	-5.5	-5.7	-5.3	-5.0
	3H	-6.1	-5.7	-5.8	-5.4	-5.1	-6.1	-5.7	-5.8	-5.4	-5.1
	4H	-6.2	-5.8	-5.9	-5.5	-5.2	-6.2	-5.8	-5.9	-5.5	-5.2
	6H	-6.2	-5.9	-5.9	-5.5	-5.2	-6.3	-5.9	-5.9	-5.6	-5.2
	8H	-6.3	-5.9	-5.9	-5.6	-5.2	-6.3	-5.9	-6.0	-5.6	-5.3
	12H	-6.3	-5.9	-5.9	-5.6	-5.3	-6.4	-6.0	-6.0	-5.7	-5.3
4H	2H	-6.2	-5.8	-5.9	-5.5	-5.2	-6.2	-5.8	-5.9	-5.5	-5.2
	3H	-6.3	-6.0	-6.0	-5.6	-5.3	-6.3	-5.9	-5.9	-5.6	-5.3
	4H	-6.4	-6.1	-6.0	-5.7	-5.3	-6.4	-6.1	-6.0	-5.7	-5.3
	6H	-6.5	-6.2	-6.0	-5.8	-5.4	-6.5	-6.2	-6.0	-5.8	-5.4
	8H	-6.5	-6.2	-6.0	-5.8	-5.4	-6.5	-6.3	-6.1	-5.8	-5.4
	12H	-6.5	-6.3	-6.1	-5.9	-5.4	-6.6	-6.3	-6.1	-5.9	-5.4
8H	4H	-6.5	-6.3	-6.1	-5.8	-5.4	-6.5	-6.2	-6.0	-5.8	-5.4
	6H	-6.6	-6.4	-6.1	-5.9	-5.4	-6.6	-6.3	-6.1	-5.9	-5.4
	8H	-6.6	-6.4	-6.1	-6.0	-5.5	-6.6	-6.4	-6.1	-6.0	-5.5
	12H	-6.6	-6.5	-6.1	-6.0	-5.5	-6.6	-6.5	-6.1	-6.0	-5.5
12H	4H	-6.6	-6.3	-6.1	-5.9	-5.4	-6.5	-6.3	-6.1	-5.9	-5.4
	6H	-6.6	-6.4	-6.1	-6.0	-5.5	-6.6	-6.4	-6.1	-5.9	-5.4
	8H	-6.6	-6.5	-6.1	-6.0	-5.5	-6.6	-6.5	-6.1	-6.0	-5.5
Variations with the observer position at spacing:											
S =		1.0H	6.4 / -8.9				6.4 / -8.9				
		1.5H	9.2 / -10.1				9.2 / -10.1				
		2.0H	11.2 / -10.6				11.2 / -10.6				