



Last information update: May 2018

**625x625 - Neutral White - general light - DALI****Product code**

P200

Technical description

Recessed direct emission luminaire designed to use Neutral White colour 4,000K LEDs and be installed in 625x625 mm modular false ceilings. The optical assembly is made of a thermoplastic material with a satin methacrylate diffuser screen for general light emission. Product complete with DALI components.

Installation

recessed for installation in 625x625 mm modular false ceilings.

Dimension (mm)

625x625

Colour

White (01)

Weight (Kg)

3.7

Mounting

ceiling recessed|wall surface

Wiring

product complete with DALI components.

Complies with EN60598-1 and pertinent regulations



IP20



IP43

On the visible part of the product once installed

**Product configuration: P200****Product characteristics**

Total lighting output [Lm]: 3519.6
Total power [W]: 32.4
Luminous efficacy [Lm/W]: 108.6
Life Time: 50,000h - L80 - B10 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 0
Emergency luminous flux [Lm]: /
Voltage [V]: -
Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 80
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 27
Nominal luminous [Lm]: 4400
Lamp maximum intensity [cd]: /
Beam angle [°]: /

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 5.4
Colour temperature [K]: 4000
CRI: 80
Wavelength [Nm]: /
MacAdam Step: 3


Polar

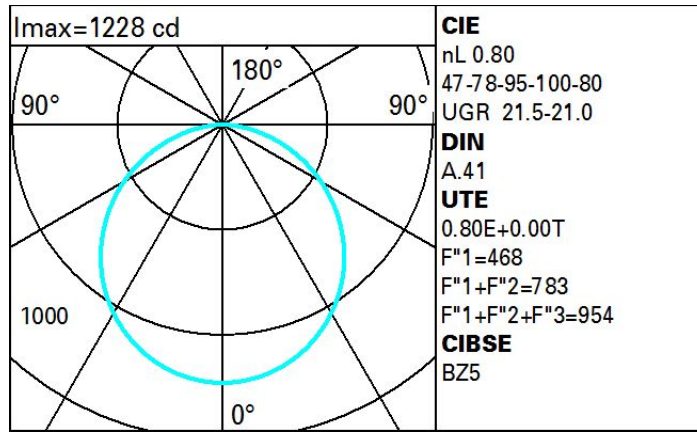

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	52	44	38	33	42	37	36	31	39
1.0	58	50	44	39	48	43	42	37	46
1.5	66	59	54	50	58	53	52	47	59
2.0	71	65	61	57	64	60	59	54	68
2.5	74	69	66	62	68	64	63	59	73
3.0	76	72	69	66	70	68	66	62	78
4.0	79	75	73	70	74	71	70	66	83
5.0	80	77	75	73	76	74	72	69	86

Luminance curve limit

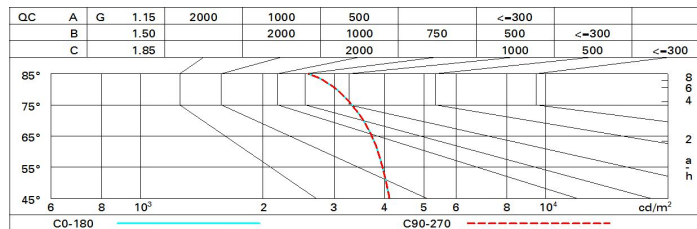

UGR diagram

Corrected UGR values (at 4400 lm bare lamp luminous flux)											
Reflect.:		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	17.5	18.7	17.8	19.0	19.3	17.5	18.7	17.8	19.0	19.3
	3H	19.1	20.2	19.4	20.5	20.8	18.0	19.1	18.3	19.4	19.7
	4H	19.7	20.8	20.1	21.1	21.4	18.2	19.2	18.5	19.5	19.9
	6H	20.2	21.2	20.6	21.5	21.9	18.3	19.2	18.6	19.6	19.9
	8H	20.4	21.3	20.8	21.6	22.0	18.3	19.2	18.7	19.5	19.9
	12H	20.5	21.4	20.9	21.7	22.1	18.3	19.1	18.6	19.5	19.9
4H	2H	18.2	19.2	18.5	19.5	19.9	19.7	20.8	20.1	21.1	21.4
	3H	20.0	20.9	20.4	21.2	21.6	20.4	21.3	20.8	21.6	22.0
	4H	20.7	21.5	21.1	21.9	22.3	20.7	21.5	21.1	21.9	22.3
	6H	21.3	22.0	21.8	22.4	22.9	20.9	21.6	21.4	22.0	22.5
	8H	21.5	22.2	22.0	22.6	23.0	21.0	21.6	21.5	22.1	22.5
	12H	21.7	22.3	22.1	22.7	23.2	21.0	21.6	21.5	22.0	22.5
8H	4H	21.0	21.6	21.5	22.1	22.5	21.5	22.2	22.0	22.6	23.0
	6H	21.8	22.3	22.2	22.8	23.2	21.9	22.4	22.4	22.9	23.4
	8H	22.1	22.5	22.5	23.0	23.5	22.1	22.5	22.5	23.0	23.5
	12H	22.3	22.7	22.8	23.2	23.7	22.2	22.6	22.7	23.0	23.6
12H	4H	21.0	21.6	21.5	22.0	22.5	21.7	22.3	22.1	22.7	23.2
	6H	21.8	22.3	22.3	22.8	23.3	22.1	22.5	22.6	23.0	23.5
	8H	22.2	22.6	22.7	23.0	23.6	22.3	22.7	22.8	23.2	23.7
Variations with the observer position at spacing:											
S =	1.0H	0.1 / -0.1					0.1 / -0.1				
	1.5H	0.2 / -0.3					0.2 / -0.3				
	2.0H	0.4 / -0.5					0.4 / -0.5				