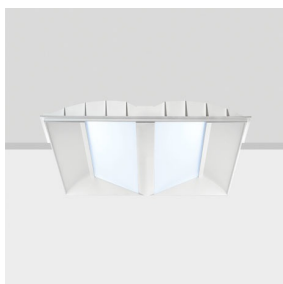


Last information update: May 2018

**600x600 - warm White - UGR<19 - DALI****Product code**

P300

**Technical description**

Recessed direct emission luminaire designed to use Warm White colour 3000K LEDs and be installed in 600x600 modular false ceilings or in plasterboard ceilings using a frame to be ordered as an accessory. The optical assembly is made of a thermoplastic material for controlled luminance with a  $UGR < 19$   $L < 3000 \text{ cd/m}^2$   $\alpha \geq 65^\circ$  beam, ideal for environments with video terminals. Product complete with DALI ballast.

**Installation**

recessed in 600x600 modular false ceilings or in plasterboard ceilings using a frame to be ordered as an accessory.

**Dimension (mm)**

600x600

**Colour**

White (01)

**Weight (Kg)**

2.56

**Mounting**

ceiling recessed

**Wiring**

product complete with DALI components

Complies with EN60598-1 and pertinent regulations



IP20



IP43

On the visible part of the product once installed

**Product configuration: P300****Product characteristics**

Total lighting output [Lm]: 3648.1  
Total power [W]: 35  
Luminous efficacy [Lm/W]: 104.2  
Life Time: 50,000h - L80 - B10 (Ta 25°C)


Total luminous flux at or above an angle of  $90^\circ$  [Lm]: 0  
Emergency luminous flux [Lm]: /  
Voltage [V]: -  
Number of optical assemblies: 1

**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 82  
Lamp code: LED  
ZVEI Code: LED  
Nominal power [W]: 30  
Nominal luminous [Lm]: 4450  
Lamp maximum intensity [cd]: /  
Beam angle [ $^\circ$ ]: /

Number of lamps for optical assembly: 1  
Socket: /  
Ballast losses [W]: 5  
Colour temperature [K]: 3000  
CRI: 80  
Wavelength [Nm]: /  
MacAdam Step: 3


# Polar

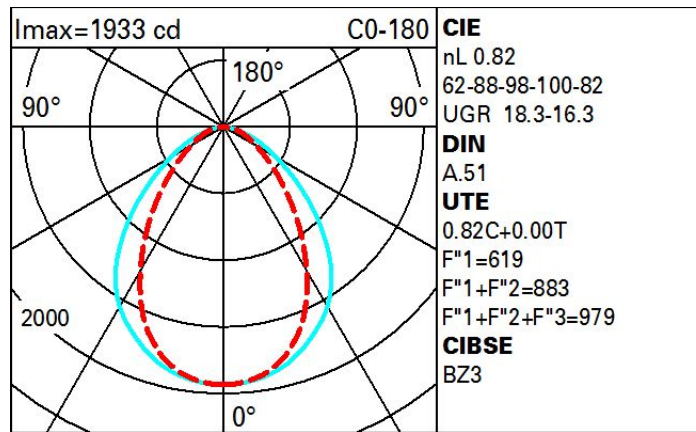

## Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	59	52	47	43	51	46	46	41	50
1.0	65	58	53	49	57	52	52	47	57
1.5	72	67	62	59	65	62	61	56	69
2.0	76	72	69	66	71	68	67	63	76
2.5	79	75	73	70	74	71	70	67	81
3.0	81	78	75	73	76	74	73	69	85
4.0	83	80	78	77	79	77	76	72	88
5.0	84	82	80	79	80	79	77	74	91

## Luminance curve limit

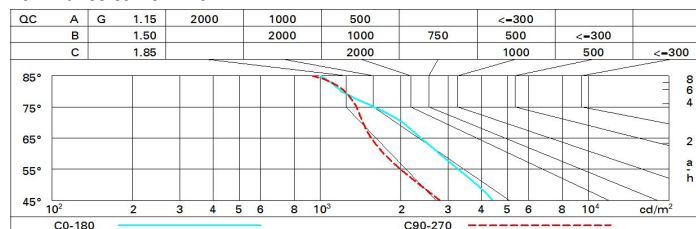

# UGR diagram

Corrected UGR values (at 4450 lm bare lamp luminous flux)												
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise					
2H	2H	16.4	17.4	16.7	17.7	18.0	14.1	15.1	14.4	15.4	15.6	15.6
	3H	17.3	18.2	17.6	18.5	18.8	14.5	15.4	14.8	15.7	16.0	16.0
	4H	17.5	18.4	17.9	18.7	19.0	14.7	15.5	15.0	15.8	16.2	16.2
	6H	17.7	18.5	18.1	18.8	19.2	14.7	15.5	15.1	15.8	16.2	16.2
	8H	17.7	18.5	18.1	18.8	19.2	14.7	15.5	15.1	15.8	16.2	16.2
	12H	17.7	18.5	18.1	18.8	19.2	14.7	15.4	15.1	15.8	16.1	16.1
4H	2H	16.6	17.5	17.0	17.8	18.1	15.3	16.2	15.6	16.5	16.8	16.8
	3H	17.7	18.4	18.1	18.8	19.1	15.9	16.6	16.3	17.0	17.3	17.3
	4H	18.0	18.7	18.4	19.1	19.5	16.1	16.8	16.5	17.2	17.5	17.5
	6H	18.3	18.8	18.7	19.2	19.7	16.3	16.9	16.7	17.3	17.7	17.7
	8H	18.3	18.9	18.8	19.3	19.7	16.3	16.9	16.8	17.3	17.7	17.7
	12H	18.4	18.8	18.8	19.3	19.7	16.3	16.8	16.8	17.2	17.7	17.7
8H	4H	18.1	18.6	18.5	19.0	19.5	16.7	17.2	17.1	17.6	18.1	18.1
	6H	18.4	18.9	18.9	19.3	19.8	16.9	17.4	17.4	17.8	18.3	18.3
	8H	18.5	18.9	19.0	19.4	19.9	17.0	17.4	17.5	17.9	18.4	18.4
	12H	18.6	18.9	19.1	19.4	19.9	17.1	17.4	17.6	17.9	18.4	18.4
12H	4H	18.1	18.6	18.5	19.0	19.5	16.7	17.2	17.2	17.7	18.1	18.1
	6H	18.4	18.8	18.9	19.3	19.8	17.1	17.4	17.5	17.9	18.4	18.4
	8H	18.6	18.9	19.1	19.4	19.9	17.2	17.5	17.7	18.0	18.5	18.5
Variations with the observer position at spacing:												
S =		1.0H	0.2 / -0.3		0.3 / -0.4							
		1.5H	0.6 / -0.9		0.5 / -0.9							
		2.0H	1.4 / -1.3		0.9 / -1.2							