


Last information update: June 2018

**Fixed round recessed luminaire - LED - medium - Super Comfort****Product code**

P319

Technical description

Round recessed luminaire with contact frame. Fixed Super Comfort version: the LEDs are set a long way back to minimize glare and guarantee a high level of visual comfort. The main body is made of die-cast aluminium with a radiant surface that guarantees optimum heat dissipation. Metallised, thermoplastic, high definition reflector - medium optic (25°). Structure with die-cast aluminium external contact frame with a single white finish. The internal ring is made of thermoplastic available in a range of painted and metallised finishes. Safety glass included Quick and easy tool free assembly. High color rendering index 2700K LED. Power unit available with a separate code no.

Installation

Recessed in a false ceiling by means of an anti-fall steel wire spring - minimum thickness of false ceiling: 1 mm - preparation hole Ø 59 mm.

Dimension (mm)

Ø67x77

Colour

White (01) | White/Brass (41) | Black/Black (43) | Black/White (47) | White/Chrome (E4) | (E7) | (E9)

Weight (Kg)

0.13

Mounting

wall recessed|ceiling recessed


Wiring

Direct current ballasts are available with a separate code no.: ON-OFF / 1-10V dimmable / DALI dimmable / Trailing Edge dimmable - the recessed fitting includes a cable and a quick-coupling connector to connect it to the connector on the ballast.

Notes

A wide range of decorative accessories and diffusers is available.

Complies with EN60598-1 and pertinent regulations

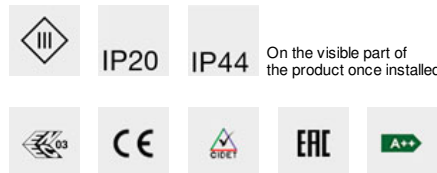**Product configuration: P319.01****Product characteristics**

Total lighting output [Lm]: 508
Total power [W]: 7.3
Luminous efficacy [Lm/W]: 69.6
Life Time: > 50,000h - L80 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 0
Emergency luminous flux [Lm]: /
Voltage [V]: -
Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 77
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 7.3
Nominal luminous [Lm]: 660
Lamp maximum intensity [cd]: /
Beam angle [°]: 24°

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 0
Colour temperature [K]: 2700
CRI: 90
Wavelength [nm]: /
MacAdam Step: 3

	CIE nL 0.77 100-100-100-100-77 UGR <10<10		Lux			
	DIN A.61		h	d	Em	Emax
	UTE 0.77A+0.00T F*1=997 F*1+F*2=1000 F*1+F*2+F*3=1000		2	0.9	496	631
	CIBSE LG3 L<1500 cd/m² at 65° UGR<10 L<1500 cd/mq @65°		4	1.7	124	158
			6	2.6	55	70
α = 24°			8	3.4	31	39

R	77	75	73	71	55	53	33	00	DRR
K0.8	70	66	63	61	65	63	63	60	78
1.0	73	69	67	65	69	66	66	64	83
1.5	76	74	72	70	73	71	70	68	89
2.0	78	77	75	74	76	74	74	72	93
2.5	80	79	78	77	78	77	76	74	96
3.0	81	80	79	79	79	78	77	75	98
4.0	82	81	81	80	80	79	78	76	99
5.0	82	82	81	81	81	80	79	77	100

QC

	A	G	1.15	2000	1000	500		<=300		
B			1.50		2000	1000	750	500	<=300	
C			1.85			2000		1000	500	<=300

The figure consists of a table at the top and a graph below it. The table has 11 columns and 4 rows. The first row is labeled 'QC' and contains values: A, G, 1.15, 2000, 1000, 500, an empty cell, <=300, an empty cell, and an empty cell. The second row contains: B, an empty cell, 1.50, an empty cell, 2000, 1000, 750, 500, <=300, and an empty cell. The third row contains: C, an empty cell, 1.85, an empty cell, an empty cell, 2000, an empty cell, an empty cell, 1000, 500, and <=300. The fourth row is empty. Below the table is a graph. The y-axis is labeled 'a h' and ranges from 45 to 85. The x-axis is labeled 'cd/m²' and is on a logarithmic scale from 10¹ to 10⁴. There are three data series: a solid red line, a dashed red line, and a solid black line. The solid red line starts at approximately (10¹, 65) and decreases to (10³, 45). The dashed red line starts at approximately (10¹, 65) and decreases to (10³, 45). The solid black line starts at approximately (10¹, 65) and decreases to (10³, 45). There are also several horizontal and vertical lines in the graph, some labeled with values like 2, 3, 4, 5, 6, 8, 10. A legend at the bottom indicates: C0-180 (solid red line), C90-270 (dashed red line), and cd/m² (solid black line).

UGR diagram

Corrected UGR values (at 600 lm bare lamp luminous flux)												
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise					
2H	2H	-0.3	1.9	0.1	2.2	2.5	-0.3	1.9	0.1	2.2	2.5	
	3H	-0.4	1.2	-0.0	1.6	1.9	-0.4	1.3	-0.0	1.6	1.9	
	4H	-0.5	0.9	-0.1	1.2	1.6	-0.4	0.9	-0.1	1.2	1.6	
	6H	-0.5	0.5	-0.1	0.9	1.2	-0.5	0.5	-0.1	0.9	1.2	
	8H	-0.5	0.5	-0.1	0.8	1.2	-0.5	0.5	-0.1	0.8	1.2	
	12H	-0.6	0.4	-0.2	0.8	1.2	-0.6	0.4	-0.2	0.8	1.2	
4H	2H	-0.4	0.9	-0.1	1.2	1.6	-0.5	0.9	-0.1	1.2	1.6	
	3H	-0.6	0.4	-0.2	0.8	1.2	-0.6	0.4	-0.2	0.8	1.2	
	4H	-0.7	0.3	-0.3	0.7	1.1	-0.7	0.3	-0.3	0.7	1.1	
	6H	-1.1	0.7	-0.6	1.1	1.6	-1.1	0.7	-0.6	1.1	1.6	
	8H	-1.2	0.7	-0.7	1.2	1.7	-1.2	0.7	-0.7	1.2	1.7	
	12H	-1.3	0.7	-0.8	1.2	1.7	-1.3	0.7	-0.8	1.2	1.7	
8H	4H	-1.2	0.7	-0.7	1.2	1.7	-1.2	0.7	-0.7	1.2	1.7	
	6H	-1.3	0.5	-0.8	1.0	1.5	-1.3	0.5	-0.8	1.0	1.5	
	8H	-1.3	0.3	-0.8	0.8	1.3	-1.3	0.3	-0.8	0.8	1.3	
	12H	-1.2	-0.1	-0.6	0.4	0.9	-1.2	-0.2	-0.7	0.3	0.9	
12H	4H	-1.3	0.7	-0.8	1.2	1.7	-1.3	0.7	-0.8	1.2	1.7	
	6H	-1.3	0.3	-0.8	0.8	1.3	-1.3	0.3	-0.8	0.8	1.3	
	8H	-1.2	-0.2	-0.7	0.3	0.9	-1.2	-0.1	-0.6	0.4	0.9	
Variations with the observer position at spacing:												
S =	1.0H	5.3 / -8.3					5.3 / -8.3					
	1.5H	8.0 / -16.9					8.0 / -16.9					
	2.0H	10.0 / -18.3					10.0 / -18.3					