

Last information update: June 2018

**Adjustable (tilting) round recessed luminaire - LED - spot****Product code**

P323

Technical description

Round recessed luminaire with contact frame. Adjustable version that tilts by a maximum of 30°. The main swivel body is made of die-cast aluminium with a radiant surface that guarantees optimum heat dissipation. Metallised, thermoplastic, high definition reflector - spot optic (15°). Structure with die-cast aluminium external contact frame with a single white finish. Steel rotating parts. The ring inside the swivel body is made of thermoplastic available in a range of painted and metallised finishes. Safety glass included Quick and easy tool free assembly. High color rendering index 2700K LED. Power unit available with a separate code no.

Installation

Recessed in a false ceiling by means of an anti-fall steel wire spring - minimum thickness of false ceiling: 1 mm - preparation hole Ø 59 mm.

Dimension (mm)

Ø67x62

Colour

White (01) | White/Brass (41) | Black/Black (43) | Black/White (47) | White/Chrome (E4) | (E7) | (E9)

Weight (Kg)

0.13

Mounting

wall recessed|ceiling recessed

Wiring

Direct current ballasts are available with a separate code no.: ON-OFF / 1-10V dimmable / DALI dimmable / Trailing Edge dimmable - the recessed fitting includes a cable and a quick-coupling connector to connect it to the connector on the ballast.

Notes

To reduce the glare caused by the internal wall of the recess when the luminaire has been rotated, a black, snap on accessory ring is available. A wide range of decorative accessories and diffusers is also available.

Complies with EN60598-1 and pertinent regulations



IP20

IP23

On the visible part of the product once installed

**Product configuration: P323.01****Product characteristics**

Total lighting output [Lm]: 461
Total power [W]: 7.5
Luminous efficacy [Lm/W]: 61.5
Life Time: > 50,000h - L80 - B10 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 0
Emergency luminous flux [Lm]: /
Voltage [V]: -
Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 70
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 7.5
Nominal luminous [Lm]: 660
Lamp maximum intensity [cd]: /
Beam angle [°]: 16°

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 0
Colour temperature [K]: 2700
CRI: 90
Wavelength [nm]: /
MacAdam Step: 3

Polar

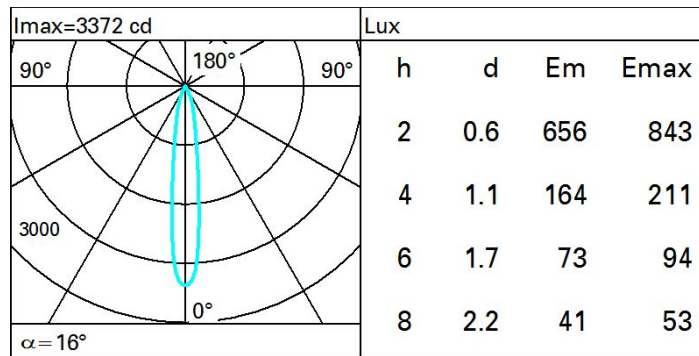

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	63	59	57	55	59	57	56	54	77
1.0	65	62	60	59	62	60	59	57	82
1.5	69	67	65	63	66	64	64	61	88
2.0	71	69	68	67	68	67	66	64	92
2.5	72	71	70	69	70	69	68	67	95
3.0	73	72	72	71	71	71	70	68	97
4.0	74	73	73	73	72	72	71	69	99
5.0	75	74	74	74	73	73	71	70	100

Luminance curve limit

