


Last information update: June 2018



**Adjustable round recessed luminaire - LED - flood - Super Comfort**

**Product code**  
P365

**Technical description**

Round recessed luminaire with contact frame. Adjustable version that rotates internally by 355° and tilts by a maximum of 30°. The swivel unit rotates in a set back position in relation to the surface of the ceiling in order to guarantee precise, comfortable light diffusion and reduce direct glare significantly. The swivel unit body is made of die-cast aluminium with a radiant surface that guarantees optimum heat dissipation. Metallised, thermoplastic, high definition reflector - flood optic (40°). Structure with die-cast aluminium external contact frame with a single white finish. Steel rotating parts. The rings inside the recessed body and the swivel unit are made of thermoplastic available in a range of painted and metallised finishes. Safety glass included Quick and easy tool free assembly. High color rendering index 2700K LED. Power unit available with a separate code no.

**Installation**

Recessed in a false ceiling by means of an anti-fall steel wire spring - minimum thickness of false ceiling: 1 mm - preparation hole Ø 75 mm.

**Dimension (mm)**

Ø83x90

**Colour**

White (01) | White/Brass (41) | Black/Black (43) | Black/White (47) | White/Chrome (E4) | (E7) | (E9)

**Weight (Kg)**

0.16

**Mounting**

wall recessed|ceiling recessed

**Wiring**

Direct current ballasts are available with a separate code no.: ON-OFF / 1-10V dimmable / DALI dimmable / Trailing Edge dimmable - the recessed fitting includes a cable and a quick-coupling connector to connect it to the connector on the ballast.

**Notes**

A wide range of decorative accessories and diffusers is also available.

Complies with EN60598-1 and pertinent regulations



**Product configuration: P365.01**

**Product characteristics**

Total lighting output [Lm]: 461  
Total power [W]: 7.3  
Luminous efficacy [Lm/W]: 63.2  
Life Time: > 50,000h - L80 - B10 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 0  
Emergency luminous flux [Lm]: /  
Voltage [V]: -  
Number of optical assemblies: 1

**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 70  
Lamp code: LED  
ZVEI Code: LED  
Nominal power [W]: 7.3  
Nominal luminous [Lm]: 660  
Lamp maximum intensity [cd]: /  
Beam angle [°]: 42°

Number of lamps for optical assembly: 1  
Socket: /  
Ballast losses [W]: 0  
Colour temperature [K]: 2700  
CRI: 90  
Wavelength [Nm]: /  
MacAdam Step: 3


**Polar**

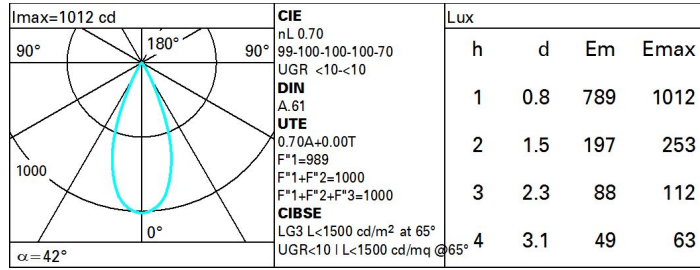

**Utilisation factors**

R	77	75	73	71	55	53	33	00	DRR
K0.8	63	60	57	55	59	57	57	54	78
1.0	66	63	61	59	62	60	60	58	82
1.5	69	67	65	64	66	64	64	62	88
2.0	71	70	68	67	69	67	67	65	93
2.5	72	71	70	69	70	69	69	67	95
3.0	73	73	72	71	71	71	70	68	97
4.0	74	74	73	73	72	72	71	69	99
5.0	75	74	74	74	73	73	72	70	100

**Luminance curve limit**

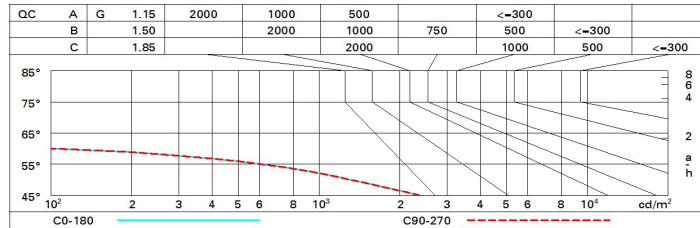

**UGR diagram**

Corrected UGR values (at 600 lm bare lamp luminous flux)											
Reflect.:		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	7.6	8.2	7.9	8.4	8.7	7.6	8.2	7.9	8.4	8.7
	3H	7.5	8.0	7.8	8.3	8.6	7.5	8.0	7.8	8.3	8.6
	4H	7.4	7.9	7.8	8.2	8.5	7.4	7.9	7.8	8.2	8.5
	6H	7.3	7.8	7.7	8.1	8.4	7.3	7.8	7.7	8.1	8.4
	8H	7.3	7.7	7.7	8.1	8.4	7.3	7.7	7.7	8.1	8.4
	12H	7.3	7.7	7.6	8.0	8.4	7.3	7.7	7.6	8.0	8.4
4H	2H	7.4	7.9	7.8	8.2	8.5	7.4	7.9	7.8	8.2	8.5
	3H	7.3	7.7	7.6	8.0	8.4	7.3	7.7	7.6	8.0	8.4
	4H	7.2	7.5	7.6	7.9	8.3	7.2	7.5	7.6	7.9	8.3
	6H	7.1	7.4	7.5	7.8	8.2	7.1	7.4	7.5	7.8	8.2
	8H	7.1	7.3	7.5	7.8	8.2	7.1	7.3	7.5	7.8	8.2
	12H	7.0	7.3	7.5	7.7	8.2	7.0	7.3	7.5	7.7	8.2
8H	4H	7.1	7.3	7.5	7.8	8.2	7.1	7.3	7.5	7.8	8.2
	6H	7.0	7.2	7.4	7.6	8.1	7.0	7.2	7.4	7.6	8.1
	8H	6.9	7.1	7.4	7.6	8.1	6.9	7.1	7.4	7.6	8.1
	12H	6.9	7.0	7.4	7.5	8.0	6.9	7.0	7.4	7.5	8.0
12H	4H	7.0	7.3	7.5	7.7	8.2	7.0	7.3	7.5	7.7	8.2
	6H	6.9	7.1	7.4	7.6	8.1	6.9	7.1	7.4	7.6	8.1
	8H	6.9	7.0	7.4	7.5	8.0	6.9	7.0	7.4	7.5	8.0
Variations with the observer position at spacing:											
S =	1.0H	5.7 / -12.2					5.7 / -12.2				
	1.5H	8.5 / -23.3					8.5 / -23.3				
	2.0H	10.5 / -23.7					10.5 / -23.7				