


Last information update: May 2018

**Fixed circular recessed luminaire - Ø125 mm - warm white - wide flood optic - UGR<10 - DALI****Product code**

P528

**Technical description**

Fixed round luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Optic with super comfort reflector vacuum-metallised with aluminium vapours and an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with LED lamp in warm white colour tone CRI90 (3000K). General light emission, with controlled luminance UGR<10 1500 cd/m<sup>2</sup> α>65° wide flood optic.

**Installation**

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 20 mm.

**Dimension (mm)**

Ø144x107

**Colour**

White/Aluminium (39)

**Weight (Kg)**

1.15

**Mounting**

ceiling recessed

**Wiring**

product complete with DALI components

Complies with EN60598-1 and pertinent regulations



IP20

IP54

On the visible part of the product once installed

**Product configuration: P528****Product characteristics**


Total lighting output [Lm]: 2097.2  
Total power [W]: 30.9  
Luminous efficacy [Lm/W]: 67.9  
Life Time: 50,000h - L80 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 0  
Emergency luminous flux [Lm]: /  
Voltage [V]: -  
Number of optical assemblies: 1

**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 75  
Lamp code: LED  
ZVEI Code: LED  
Nominal power [W]: 28  
Nominal luminous [Lm]: 2800  
Lamp maximum intensity [cd]: /  
Beam angle [°]: 42°


Number of lamps for optical assembly: 1  
Socket: /  
Ballast losses [W]: 2.9  
Colour temperature [K]: 3000  
CRI: 90  
Wavelength [Nm]: /  
MacAdam Step: 2

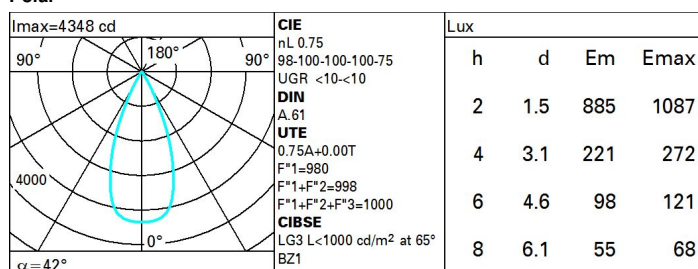**Polar**

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	67	63	61	59	63	61	60	58	77
1.0	70	67	65	63	66	64	64	61	82
1.5	74	71	69	68	70	69	68	66	88
2.0	76	74	73	72	73	72	71	69	92
2.5	78	76	75	74	75	74	73	71	95
3.0	78	78	77	76	76	76	75	73	97
4.0	79	79	78	78	77	77	76	74	99
5.0	80	79	79	79	78	78	77	75	100

# Luminance curve limit

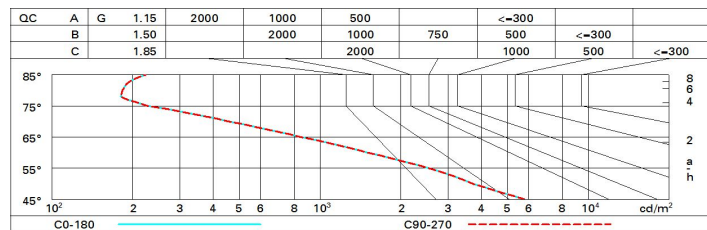

# UGR diagram

Corrected UGR values (at 2800 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	8.3	8.9	8.5	9.1	9.3	8.3	8.9	8.5	9.1	9.3
	3H	8.2	8.7	8.5	9.0	9.3	8.2	8.7	8.5	9.0	9.3
	4H	8.1	8.6	8.4	8.9	9.2	8.2	8.6	8.5	8.9	9.2
	6H	8.0	8.5	8.4	8.8	9.1	8.1	8.5	8.4	8.8	9.2
	8H	8.0	8.4	8.4	8.8	9.1	8.0	8.5	8.4	8.8	9.1
	12H	8.0	8.4	8.3	8.7	9.1	8.0	8.4	8.4	8.8	9.1
4H	2H	8.2	8.6	8.5	8.9	9.2	8.1	8.6	8.4	8.9	9.2
	3H	8.1	8.5	8.4	8.8	9.2	8.1	8.5	8.4	8.8	9.2
	4H	8.0	8.4	8.4	8.7	9.1	8.0	8.4	8.4	8.7	9.1
	6H	7.9	8.2	8.3	8.6	9.0	7.9	8.2	8.3	8.6	9.0
	8H	7.9	8.2	8.3	8.6	9.0	7.9	8.2	8.3	8.6	9.0
	12H	7.8	8.1	8.3	8.5	9.0	7.8	8.1	8.3	8.5	9.0
8H	4H	7.9	8.2	8.3	8.6	9.0	7.9	8.2	8.3	8.6	9.0
	6H	7.8	8.0	8.2	8.5	8.9	7.8	8.0	8.2	8.5	8.9
	8H	7.7	7.9	8.2	8.4	8.9	7.7	7.9	8.2	8.4	8.9
	12H	7.7	7.9	8.2	8.3	8.9	7.7	7.9	8.2	8.3	8.9
12H	4H	7.8	8.1	8.3	8.5	9.0	7.8	8.1	8.3	8.5	9.0
	6H	7.7	7.9	8.2	8.4	8.9	7.7	7.9	8.2	8.4	8.9
	8H	7.7	7.9	8.2	8.3	8.9	7.7	7.9	8.2	8.3	8.9
Variations with the observer position at spacing:											
S =	1.0H	3.9 / -4.4					3.9 / -4.4				
	1.5H	6.4 / -7.9					6.4 / -7.9				
	2.0H	8.4 / -10.8					8.4 / -10.8				