


Last information update: June 2018

**300 X 300 mm - neutral white LED - electronic control gear - general light optic opaline screen****Product code**

P612

**Technical description**

Direct emission recessed or ceiling-mounted luminaire (with an installation accessory ordered separately) designed to use neutral white 4000K high CRI LEDs. The optical assembly consists of a painted aluminium frame, a satin methacrylate diffuser screen for general light emission and a sheet metal rear closing base. The LEDs are arranged inside the perimeter and the driver is housed in the upper part of the product.

**Installation**

Recessed in plasterboard suspended ceilings (with an accessory frame), pendant mounted using a kit to be ordered separately.

**Dimension (mm)**

300x300x14

**Colour**

White (01)

**Weight (Kg)**

1.52

**Mounting**

ceiling recessed|wall surface|ceiling surface

**Wiring**

product complete with electronic components

Complies with EN60598-1 and pertinent regulations



IP20

IP40

On the visible part of the product once installed

**Product configuration: P612****Product characteristics**


Total lighting output [Lm]: 1889.7  
 Total power [W]: 19.9  
 Luminous efficacy [Lm/W]: 95  
 Life Time: 50,000h - L80 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 0  
 Emergency luminous flux [Lm]: /  
 Voltage [V]: -  
 Number of optical assemblies: 1


**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 70  
 Lamp code: LED  
 ZVEI Code: LED  
 Nominal power [W]: 17  
 Nominal luminous [Lm]: 2700  
 Lamp maximum intensity [cd]: /  
 Beam angle [°]: /

Number of lamps for optical assembly: 1  
 Socket: /  
 Ballast losses [W]: 2.9  
 Colour temperature [K]: 4000  
 CRI: 80  
 Wavelength [Nm]: /  
 MacAdam Step: 3




**Polar**

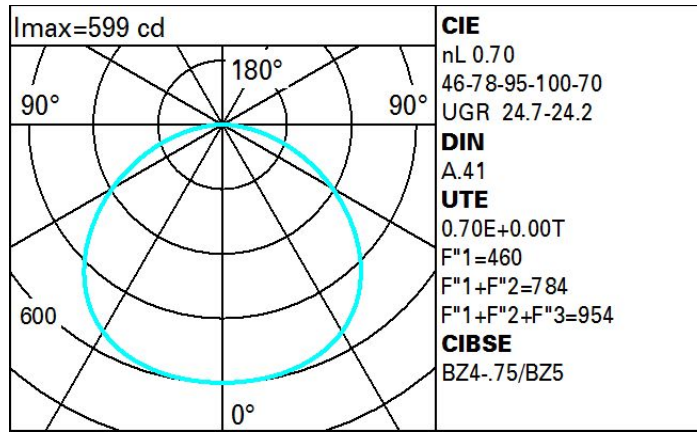

**Utilisation factors**

R	77	75	73	71	55	53	33	00	DRR
K0.8	45	38	33	29	37	32	32	27	38
1.0	50	43	38	34	42	37	37	32	46
1.5	58	52	47	43	50	46	46	41	59
2.0	62	57	53	50	56	52	51	47	67
2.5	65	61	57	54	59	56	55	51	73
3.0	66	63	60	58	61	59	58	54	77
4.0	69	66	64	61	64	62	61	58	83
5.0	70	68	66	64	66	64	63	60	86

**Luminance curve limit**

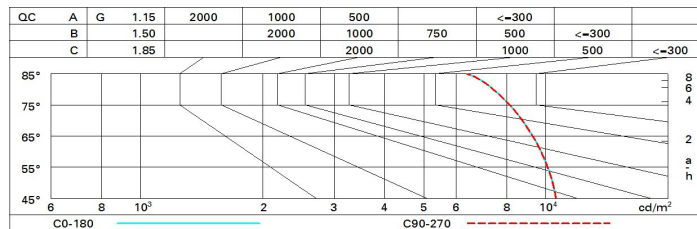

**UGR diagram**

Corrected UGR values (at 2700 lm bare lamp luminous flux)											
Reflect.:		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	20.8	22.0	21.1	22.3	22.5	20.8	22.0	21.1	22.3	22.5
	3H	22.3	23.4	22.7	23.7	24.0	21.3	22.4	21.6	22.7	23.0
	4H	22.9	23.9	23.3	24.3	24.6	21.5	22.5	21.8	22.8	23.1
	6H	23.4	24.3	23.8	24.7	25.0	21.6	22.5	21.9	22.8	23.2
	8H	23.6	24.5	23.9	24.8	25.2	21.6	22.5	22.0	22.8	23.2
	12H	23.7	24.5	24.1	24.9	25.2	21.5	22.4	21.9	22.8	23.1
4H	2H	21.5	22.5	21.8	22.8	23.1	22.9	23.9	23.3	24.3	24.6
	3H	23.2	24.1	23.6	24.4	24.8	23.6	24.5	24.0	24.8	25.2
	4H	23.9	24.7	24.3	25.1	25.5	23.9	24.7	24.3	25.1	25.5
	6H	24.5	25.2	24.9	25.6	26.0	24.1	24.8	24.6	25.2	25.6
	8H	24.7	25.3	25.1	25.7	26.2	24.2	24.8	24.6	25.2	25.7
	12H	24.8	25.4	25.3	25.8	26.3	24.2	24.8	24.7	25.2	25.7
8H	4H	24.2	24.8	24.6	25.2	25.7	24.7	25.3	25.1	25.7	26.2
	6H	24.9	25.4	25.4	25.9	26.4	25.1	25.6	25.5	26.0	26.5
	8H	25.2	25.6	25.7	26.1	26.6	25.2	25.6	25.7	26.1	26.6
	12H	25.4	25.8	25.9	26.3	26.8	25.3	25.7	25.8	26.2	26.7
12H	4H	24.2	24.8	24.7	25.2	25.7	24.8	25.4	25.3	25.8	26.3
	6H	25.0	25.4	25.5	25.9	26.4	25.2	25.7	25.7	26.1	26.7
	8H	25.3	25.7	25.8	26.2	26.7	25.4	25.8	25.9	26.3	26.8
Variations with the observer position at spacing:											
S =	1.0H	0.1 / -0.1					0.1 / -0.1				
	1.5H	0.3 / -0.4					0.3 / -0.4				
	2.0H	0.4 / -0.5					0.4 / -0.5				