

Platea Pro

Design Jean Michel Wilmotte

iGuzzini

Last information update: June 2018



Fixed circular recessed luminaire - Ø212 mm - neutral white - medium optic - UGR<10

Product code

P818

Technical description


Fixed round luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Optic with supercomfort reflector vacuum-metallised with aluminium vapours and an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with LED lamp in neutral white colour tone (4,000K). General light emission, with controlled luminance UGR<10 1500 cd/m² α >65° medium optic.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 25 mm.

Dimension (mm)

406x276



Colour

Grey (15)

Weight (Kg)

8.55

Mounting

wall arm|wall surface|ground anchored

Wiring

product complete with DALI components

Notes

Available accessories include: a refractor for elliptical light flow distribution, diffusing glass, visor, directional flaps, protective grille and a spike for ground installation.

Complies with EN60598-1 and pertinent regulations



Product configuration: P818

Product characteristics

Total lighting output [Lm]: 6969
Total power [W]: 83.5
Luminous efficacy [Lm/W]: 83.5
Life Time: 74,000h - L80 - B10 (Ta 25°C)
Ambient temperature range: from -20°C to +35°C. (*)

Total luminous flux at or above an angle of 90° [Lm]: 0
Emergency luminous flux [Lm]: /
Voltage [V]: -
Life Time: 74,000h - L80 - B10 (Ta 40°C)
Number of optical assemblies: 1


* Preliminary data

Optical assembly Characteristics Type 1


Light Output Ratio (L.O.R.) [%]: 76
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 76
Nominal luminous [Lm]: 9170
Lamp maximum intensity [cd]: /
Beam angle [°]: 12°

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 7.5
Colour temperature [K]: 4000
CRI: 80
Wavelength [Nm]: /
MacAdam Step: 3

Polar

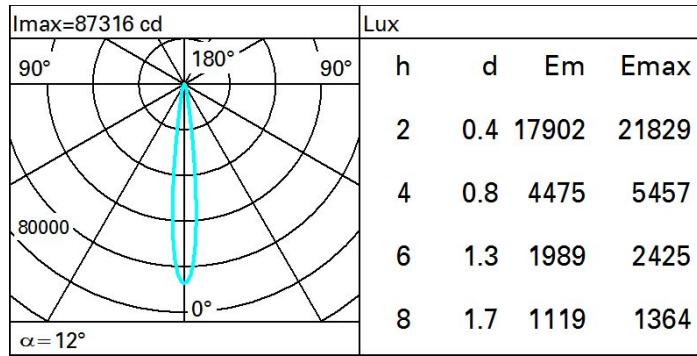

Isolux

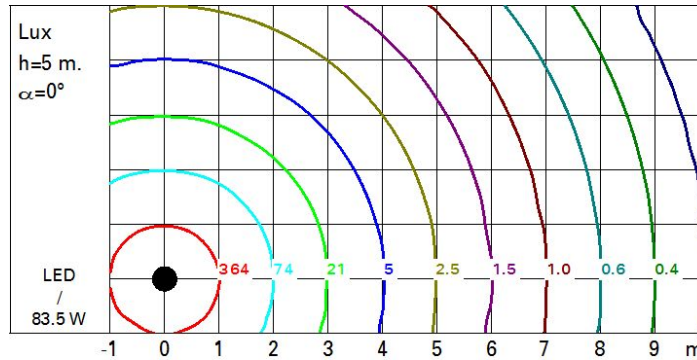

UGR diagram

Corrected UGR values (at 9170 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	11.4	13.4	11.8	13.7	14.0	11.4	13.4	11.8	13.7	14.0
	3H	11.9	13.2	12.3	13.5	13.8	11.7	13.0	12.1	13.3	13.6
	4H	12.0	13.0	12.4	13.3	13.6	11.8	12.8	12.2	13.1	13.4
	6H	12.0	12.7	12.4	13.0	13.4	11.8	12.5	12.2	12.8	13.2
	8H	11.9	12.7	12.3	13.1	13.4	11.7	12.5	12.1	12.9	13.2
	12H	11.8	12.8	12.2	13.1	13.5	11.6	12.6	12.0	12.9	13.3
4H	2H	11.8	12.8	12.2	13.1	13.4	12.0	13.0	12.4	13.3	13.6
	3H	12.3	13.2	12.7	13.6	13.9	12.3	13.2	12.7	13.5	13.9
	4H	12.2	13.4	12.6	13.8	14.2	12.2	13.4	12.6	13.8	14.2
	6H	11.9	13.6	12.4	14.1	14.6	12.0	13.7	12.4	14.1	14.6
	8H	11.8	13.7	12.3	14.1	14.6	11.9	13.7	12.4	14.2	14.7
	12H	11.7	13.6	12.3	14.1	14.6	11.8	13.6	12.3	14.1	14.6
8H	4H	11.9	13.7	12.4	14.2	14.7	11.8	13.7	12.3	14.1	14.6
	6H	11.9	13.4	12.4	13.9	14.4	11.8	13.4	12.4	13.9	14.4
	8H	11.9	13.1	12.4	13.6	14.1	11.9	13.1	12.4	13.6	14.1
	12H	12.0	12.7	12.6	13.2	13.8	12.0	12.7	12.6	13.2	13.8
12H	4H	11.8	13.6	12.3	14.1	14.6	11.7	13.6	12.3	14.1	14.6
	6H	11.9	13.1	12.4	13.6	14.1	11.9	13.1	12.4	13.6	14.1
	8H	12.0	12.7	12.6	13.2	13.8	12.0	12.7	12.6	13.2	13.8
Variations with the observer position at spacing:											
S =	1.0H	1.6 / -0.9					1.6 / -0.9				
	1.5H	3.1 / -1.8					3.1 / -1.8				
	2.0H	4.6 / -3.2					4.6 / -3.2				