


Last information update: May 2018



Deep Minimal - 1 element - CoB warm LED - flood beam - dimmable DALI

Product code

P910

Technical description

Individual recessed luminaire for LED lamp. Minimal (frameless) version with no contact frame. Shaped stainless steel sheet structural frame specifically designed for flush with ceiling application using the adapter supplied. Die-cast aluminium, twin swivel universal joint located in a position set back from the installation surface to guarantee a high level of visual comfort. Tilts $\pm 30^\circ$ around both the horizontal and vertical axes. Die-cast aluminium lighting body designed to optimise heat dispersal. High efficiency aluminium reflector - flood angle. High color rendering index, warm white LED lamp. Glass cover Control gear unit included.

Installation

Recessed in 12.5 mm thick false ceilings. The aluminium adapter is designed for filling, smoothing and finishing the false ceiling before inserting the recessed unit. Steel wire fixing springs. Preparation hole 106 x 106

Dimension (mm)

100x100x89

Colour

White (01) | Black (04)

Weight (Kg)

0.7

Mounting

ceiling recessed

Wiring

Complete with DALI dimmable control gear unit connected to the luminaire. Wiring for connecting to mains network on driver terminal board.

Notes

Accessories available: refractor for elliptical flow distribution - interchangeable reflectors - adapter for installation in 15 mm thick false ceilings

Complies with EN60598-1 and pertinent regulations

IP20 IP23 On the visible part of the product once installed



Product configuration: P910

Product characteristics


Total lighting output [Lm]: 749
 Total power [W]: 10.7
 Luminous efficacy [Lm/W]: 70
 Life Time: > 50,000h - L80 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 0
 Emergency luminous flux [Lm]: /
 Voltage [V]: -
 Number of optical assemblies: 1


Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 79
 Lamp code: LED
 ZVEI Code: LED
 Nominal power [W]: 8.4
 Nominal luminous [Lm]: 950
 Lamp maximum intensity [cd]: /
 Beam angle [°]: 42°

Number of lamps for optical assembly: 1
 Socket: /
 Ballast losses [W]: 2.3
 Colour temperature [K]: 3000
 CRI: 90
 Wavelength [Nm]: /
 MacAdam Step: 3




Polar

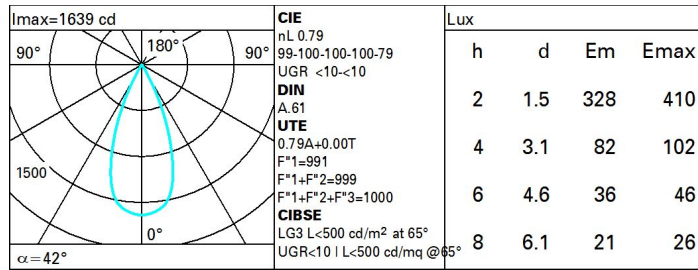

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	71	67	65	63	67	64	64	61	78
1.0	74	71	68	67	70	68	68	65	82
1.5	78	75	73	72	74	73	72	70	88
2.0	80	78	77	76	77	76	75	73	93
2.5	82	80	79	78	79	78	77	75	95
3.0	83	82	81	80	81	80	79	77	98
4.0	84	83	83	82	82	81	80	78	99
5.0	84	84	83	83	82	82	81	79	100

Luminance curve limit

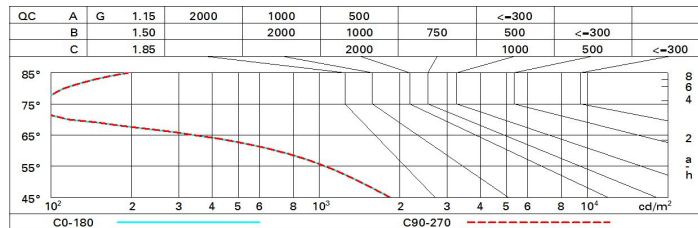

UGR diagram

Corrected UGR values (at 950 lm bare lamp luminous flux)											
Reflect.:		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	3.6	4.2	3.9	4.4	4.7	3.6	4.2	3.9	4.4	4.7
	3H	3.5	4.0	3.8	4.3	4.6	3.6	4.1	3.9	4.4	4.6
	4H	3.5	3.9	3.8	4.2	4.5	3.5	4.0	3.8	4.3	4.6
	6H	3.4	3.8	3.7	4.1	4.5	3.4	3.9	3.8	4.2	4.5
	8H	3.4	3.8	3.7	4.1	4.4	3.4	3.8	3.8	4.2	4.5
	12H	3.3	3.7	3.7	4.1	4.4	3.4	3.8	3.7	4.1	4.5
4H	2H	3.5	4.0	3.8	4.3	4.6	3.5	3.9	3.8	4.2	4.5
	3H	3.4	3.8	3.8	4.1	4.5	3.4	3.8	3.8	4.1	4.5
	4H	3.3	3.7	3.7	4.0	4.4	3.3	3.7	3.7	4.0	4.4
	6H	3.2	3.5	3.7	3.9	4.4	3.2	3.5	3.7	3.9	4.4
	8H	3.2	3.5	3.6	3.9	4.3	3.2	3.5	3.6	3.9	4.3
	12H	3.2	3.4	3.6	3.8	4.3	3.1	3.4	3.6	3.8	4.3
8H	4H	3.2	3.5	3.6	3.9	4.3	3.2	3.5	3.6	3.9	4.3
	6H	3.1	3.3	3.6	3.8	4.3	3.1	3.3	3.6	3.8	4.3
	8H	3.1	3.3	3.5	3.7	4.2	3.1	3.3	3.5	3.7	4.2
	12H	3.0	3.2	3.5	3.7	4.2	3.0	3.2	3.5	3.7	4.2
12H	4H	3.1	3.4	3.6	3.8	4.3	3.2	3.4	3.6	3.8	4.3
	6H	3.0	3.3	3.5	3.7	4.2	3.1	3.3	3.6	3.7	4.2
	8H	3.0	3.2	3.5	3.7	4.2	3.0	3.2	3.5	3.7	4.2
Variations with the observer position at spacing:											
S =	1.0H	5.3 / -4.9					5.3 / -4.9				
	1.5H	8.0 / -7.8					8.0 / -7.8				
	2.0H	9.9 / -11.8					9.9 / -11.8				