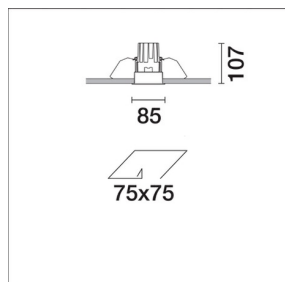
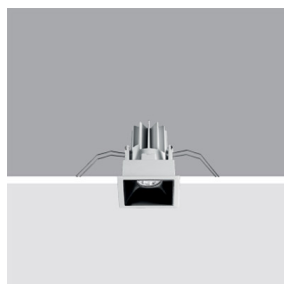


Last information update: May 2018

**Fixed, Recessed luminaire - Warm LED - Incorporated DALI dimmable power supply - Medium optic Beam****Product code**

P950

Technical description

Fixed optic, recessed luminaire for a warm white LED lamp with a high color rendering index. Passive heat dissipation system. Lamp body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised, thermoplastic, high definition optic, integrated in a rear position in the anti-glare screen. Glass cover for LED lamp. The structure of the optical system produces light emission with controlled luminance (UGR < 19). Equipped with a dimmable DALI ballast connected to the luminaire.

Installation

recessed with steel wire springs for false ceilings from 1 to 30 mm thick - preparation hole 75 x 75. Installation permitted in either a horizontal or vertical position.

Dimension (mm)

85x85x107

Colour

White (01) | Black/Black (43) | Black/White (47) | Grey/Black (74)

Weight (Kg)

0.5

Mounting

wall recessed|ceiling recessed

Wiring

on the control gears box with quick-coupling connections. Digital electronic cabling that allows dimming to be performed with DALI protocol or a pushbutton switch (DIM SWITCH).

Notes

The product with its white finish (01) includes an optic ring for limiting luminance; a feature that renders a performance of UGR < 19 and determines slight variations in the opening of the optic (32°) and yield (0.73).

Complies with EN60598-1 and pertinent regulations

**Product configuration: P950.01****Product characteristics**

Total lighting output [Lm]: 693

Total power [W]: 10.8

Luminous efficacy [Lm/W]: 64.1

Life Time: 50'000h - L80 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 0

Emergency luminous flux [Lm]: /

Voltage [V]: 230

Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 66

Lamp code: LED

ZVEI Code: LED

Nominal power [W]: 8.5

Nominal luminous [Lm]: 1050

Lamp maximum intensity [cd]: /

Beam angle [°]: 24°

Number of lamps for optical assembly: 1

Socket: /

Ballast losses [W]: 2.3


Colour temperature [K]: 3000

CRI: 90

Wavelength [Nm]: /

MacAdam Step: 3


Polar

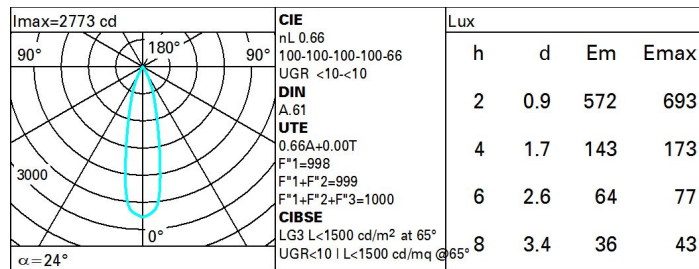

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	60	57	54	53	56	54	54	52	78
1.0	62	59	57	56	59	57	57	55	83
1.5	65	63	62	60	62	61	60	58	89
2.0	67	66	65	64	65	64	63	61	93
2.5	68	67	66	66	66	66	65	63	96
3.0	69	69	68	67	67	67	66	64	98
4.0	70	70	69	69	68	68	67	66	99
5.0	71	70	70	70	69	69	68	66	100

Luminance curve limit

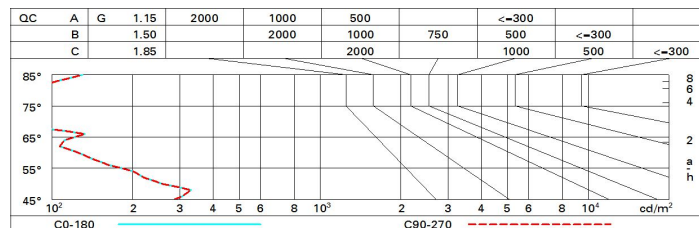

UGR diagram

Corrected UGR values (at 1050 lm bare lamp luminous flux)												
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise					
2H	2H	3.3	5.4	3.6	5.7	6.0	3.3	5.4	3.6	5.7	6.0	
	3H	3.1	4.8	3.5	5.1	5.4	3.1	4.7	3.5	5.1	5.4	
	4H	3.0	4.4	3.4	4.8	5.1	3.0	4.4	3.4	4.8	5.1	
	6H	3.0	4.1	3.4	4.5	4.8	3.0	4.1	3.4	4.4	4.8	
	8H	3.0	4.1	3.3	4.4	4.8	2.9	4.0	3.3	4.4	4.8	
	12H	2.9	4.0	3.3	4.4	4.7	2.9	4.0	3.3	4.3	4.7	
4H	2H	3.0	4.4	3.4	4.8	5.1	3.0	4.4	3.4	4.8	5.1	
	3H	2.9	4.0	3.3	4.3	4.7	2.9	4.0	3.3	4.4	4.7	
	4H	2.8	3.8	3.2	4.2	4.6	2.8	3.8	3.2	4.2	4.6	
	6H	2.5	4.1	2.9	4.6	5.0	2.4	4.1	2.9	4.6	5.0	
	8H	2.3	4.2	2.8	4.7	5.2	2.3	4.2	2.8	4.6	5.1	
	12H	2.2	4.2	2.7	4.7	5.2	2.2	4.2	2.7	4.6	5.2	
8H	4H	2.3	4.2	2.8	4.6	5.1	2.3	4.2	2.8	4.7	5.2	
	6H	2.2	4.0	2.7	4.5	5.0	2.2	4.0	2.7	4.5	5.0	
	8H	2.2	3.8	2.7	4.3	4.8	2.2	3.8	2.7	4.3	4.8	
	12H	2.4	3.3	2.9	3.8	4.4	2.4	3.3	2.9	3.8	4.4	
12H	4H	2.2	4.2	2.7	4.6	5.2	2.2	4.2	2.7	4.7	5.2	
	6H	2.2	3.8	2.7	4.3	4.8	2.2	3.8	2.7	4.3	4.8	
	8H	2.4	3.3	2.9	3.8	4.4	2.4	3.3	2.9	3.8	4.4	
Variations with the observer position at spacing:												
S =		1.0H	6.7 / -13.0					6.7 / -13.0				
		1.5H	9.5 / -14.0					9.5 / -14.0				
		2.0H	11.5 / -14.4					11.5 / -14.4				