


Last information update: June 2018

**recessed luminaire Ø 137 - neutral white passive dissipation integrated electronic control gear - flood****Product code**

Q181

Technical description

recessed adjustable removable luminaire for LED lamp with passive heat dissipation system. Structure with die-cast aluminium frame and main body; shaped surface with high level radiant effect for effectively reducing the temperature and keeping the long-term LED lamp performance unchanged. Steel rotation hinge, chrome-plated aluminium body closing ring. Reflector with high efficiency super-pure aluminium optic - flood beam angle. Body adjusted using manually operated device: internal 30° - external 75° - rotation about axis 355°. Supplied with electronic control gear connected to the luminaire. Neutral white high efficiency LED

Installation

recessed using special steel springs in false ceilings with thicknesses starting at 1 mm; preparation hole Ø 125

Dimension (mm)

Ø137x91

Colour

White/Aluminium (39) | Grey/Aluminium (78)

Weight (Kg)

1.02

Mounting

ceiling recessed

Wiring

on control gear box with quick-coupling connections

Complies with EN60598-1 and pertinent regulations



IP20

**Product configuration: Q181****Product characteristics**


Total lighting output [Lm]: 2367
Total power [W]: 24.7
Luminous efficacy [Lm/W]: 95.8
Life Time: > 50,000h - L80 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 0
Emergency luminous flux [Lm]: /
Voltage [V]: -
Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 79
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 21
Nominal luminous [Lm]: 3000
Lamp maximum intensity [cd]: /
Beam angle [°]: 42°


Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 3.7
Colour temperature [K]: 4000
CRI: 80
Wavelength [Nm]: /
MacAdam Step: 2

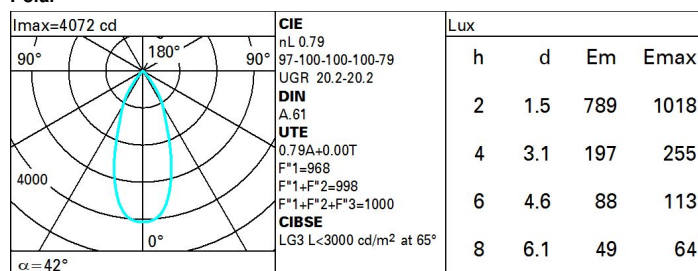Polar

Utilisation factors

| R | 77 | 75 | 73 | 71 | 55 | 53 | 33 | 00 | DRR |
|------|----|----|----|----|----|----|----|----|-----|
| K0.8 | 70 | 66 | 64 | 61 | 66 | 63 | 63 | 60 | 76 |
| 1.0 | 73 | 70 | 67 | 66 | 69 | 67 | 67 | 64 | 81 |
| 1.5 | 77 | 75 | 73 | 71 | 74 | 72 | 71 | 69 | 87 |
| 2.0 | 80 | 78 | 77 | 75 | 77 | 76 | 75 | 72 | 92 |
| 2.5 | 82 | 80 | 79 | 78 | 79 | 78 | 77 | 75 | 95 |
| 3.0 | 83 | 82 | 81 | 80 | 80 | 79 | 78 | 76 | 97 |
| 4.0 | 84 | 83 | 82 | 82 | 81 | 81 | 80 | 78 | 99 |
| 5.0 | 84 | 84 | 83 | 83 | 82 | 82 | 80 | 79 | 100 |

Luminance curve limit

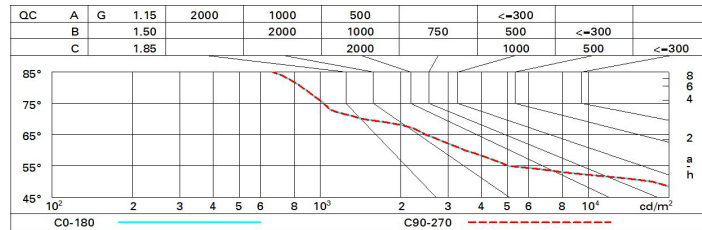

UGR diagram

| Corrected UGR values (at 3000 lm bare lamp luminous flux) | | | | | | | | | | | |
|--|-----|---------------------|------|------|------|------|-------------------|------|------|------|------|
| Reflect.: ceiling/cav walls work pl. Room dim x y | | viewed crosswise | | | | | viewed endwise | | | | |
| 2H | 2H | 20.8 | 21.5 | 21.1 | 21.7 | 21.9 | 20.8 | 21.5 | 21.1 | 21.7 | 21.9 |
| | 3H | 20.7 | 21.3 | 21.0 | 21.5 | 21.8 | 20.7 | 21.3 | 21.0 | 21.5 | 21.8 |
| | 4H | 20.6 | 21.1 | 20.9 | 21.4 | 21.7 | 20.6 | 21.1 | 20.9 | 21.4 | 21.7 |
| | 6H | 20.5 | 21.0 | 20.9 | 21.3 | 21.7 | 20.5 | 21.0 | 20.9 | 21.3 | 21.7 |
| | 8H | 20.5 | 21.0 | 20.8 | 21.3 | 21.6 | 20.5 | 21.0 | 20.8 | 21.3 | 21.6 |
| | 12H | 20.4 | 20.9 | 20.8 | 21.2 | 21.6 | 20.4 | 20.9 | 20.8 | 21.2 | 21.6 |
| 4H | 2H | 20.6 | 21.1 | 20.9 | 21.4 | 21.7 | 20.6 | 21.1 | 20.9 | 21.4 | 21.7 |
| | 3H | 20.4 | 20.9 | 20.8 | 21.2 | 21.6 | 20.4 | 20.9 | 20.8 | 21.2 | 21.6 |
| | 4H | 20.3 | 20.8 | 20.7 | 21.1 | 21.5 | 20.3 | 20.8 | 20.7 | 21.1 | 21.5 |
| | 6H | 20.3 | 20.6 | 20.7 | 21.0 | 21.4 | 20.3 | 20.6 | 20.7 | 21.0 | 21.4 |
| | 8H | 20.2 | 20.6 | 20.7 | 21.0 | 21.4 | 20.2 | 20.5 | 20.7 | 21.0 | 21.4 |
| | 12H | 20.2 | 20.5 | 20.6 | 20.9 | 21.4 | 20.2 | 20.5 | 20.6 | 20.9 | 21.4 |
| 8H | 4H | 20.2 | 20.5 | 20.7 | 21.0 | 21.4 | 20.2 | 20.6 | 20.7 | 21.0 | 21.4 |
| | 6H | 20.1 | 20.4 | 20.6 | 20.8 | 21.3 | 20.1 | 20.4 | 20.6 | 20.8 | 21.3 |
| | 8H | 20.1 | 20.3 | 20.6 | 20.8 | 21.3 | 20.1 | 20.3 | 20.6 | 20.8 | 21.3 |
| | 12H | 20.0 | 20.2 | 20.5 | 20.7 | 21.2 | 20.0 | 20.2 | 20.5 | 20.7 | 21.2 |
| 12H | 4H | 20.2 | 20.5 | 20.6 | 20.9 | 21.4 | 20.2 | 20.5 | 20.6 | 20.9 | 21.4 |
| | 6H | 20.1 | 20.3 | 20.6 | 20.8 | 21.3 | 20.1 | 20.3 | 20.6 | 20.8 | 21.3 |
| | 8H | 20.0 | 20.2 | 20.5 | 20.7 | 21.2 | 20.0 | 20.2 | 20.5 | 20.7 | 21.2 |
| Variations with the observer position at spacing: | | | | | | | | | | | |
| S = | | 1.0H | | | | | 5.1 / -14.3 | | | | |
| | | 1.5H | | | | | 7.9 / -16.4 | | | | |
| | | 2.0H | | | | | 9.9 / -17.8 | | | | |