

Last information update: May 2018



fixed circular recessed luminaire - Ø153 mm - tunable white

Product code
Q264


Technical description

Round fixed luminaire designed to use LED lamps with C.o.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with tunable White LED with a colour change temperature from 2700K to 6500K. General light emission, with controlled luminance UGR<19 1500 cd/m2 α>65° flood optic.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thicknesses ranging from 1 mm to 20 mm.

Dimension (mm)
Ø162x122



Colour
White/Aluminium (39)

Weight (Kg)
1.2

Mounting
ceiling recessed

Wiring
product complete with DALI dimmable ballast.

Complies with EN60598-1 and pertinent regulations

IP20 IP54 On the visible part of the product once installed



Product configuration: Q264

Product characteristics

Total lighting output [Lm]: 2016
Total power [W]: 23.6
Luminous efficacy [Lm/W]: 85.4
Life Time: 50,000h - L80 - B10 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 0
Emergency luminous flux [Lm]: /
Voltage [V]: -
Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 72
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 20
Nominal luminous [Lm]: 2800
Lamp maximum intensity [cd]: /
Beam angle [°]: 58°

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 3.6
Colour temperature [K]: /
CRI: /
Wavelength [Nm]: /
MacAdam Step: /


Polar

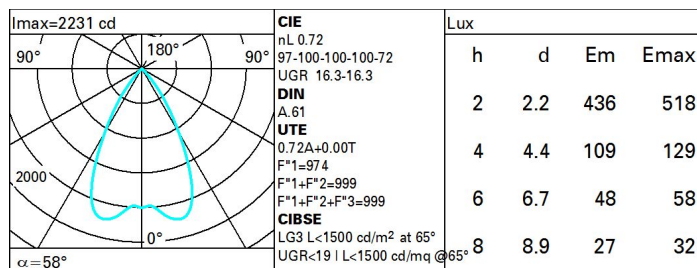

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	64	61	58	56	60	58	57	55	77
1.0	67	64	62	60	63	61	61	59	81
1.5	71	68	67	65	68	66	65	63	88
2.0	73	71	70	69	70	69	68	66	92
2.5	74	73	72	71	72	71	70	68	95
3.0	75	74	74	73	73	73	72	70	97
4.0	76	76	75	75	74	74	73	71	99
5.0	77	76	76	76	75	75	73	72	100

Luminance curve limit

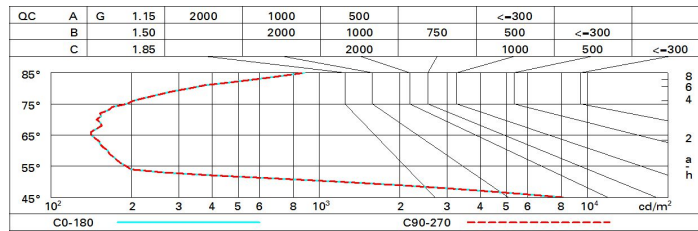

UGR diagram

Corrected UGR values (at 2800 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceillcav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	16.9	17.5	17.1	17.7	18.0	16.9	17.5	17.1	17.7	18.0
	3H	16.7	17.3	17.0	17.6	17.8	16.7	17.3	17.0	17.6	17.8
	4H	16.6	17.2	17.0	17.5	17.8	16.6	17.2	17.0	17.5	17.8
	6H	16.6	17.1	16.9	17.4	17.7	16.6	17.1	16.9	17.4	17.7
	8H	16.5	17.0	16.9	17.3	17.7	16.5	17.0	16.9	17.3	17.7
	12H	16.5	17.0	16.9	17.3	17.6	16.5	16.9	16.9	17.3	17.6
4H	2H	16.6	17.2	17.0	17.5	17.8	16.6	17.2	17.0	17.5	17.8
	3H	16.5	16.9	16.9	17.3	17.6	16.5	16.9	16.9	17.3	17.6
	4H	16.4	16.8	16.8	17.2	17.6	16.4	16.8	16.8	17.2	17.6
	6H	16.3	16.7	16.7	17.1	17.5	16.3	16.7	16.7	17.1	17.5
	8H	16.3	16.6	16.7	17.0	17.4	16.3	16.6	16.7	17.0	17.4
	12H	16.2	16.5	16.7	16.9	17.4	16.2	16.5	16.7	16.9	17.4
8H	4H	16.3	16.6	16.7	17.0	17.4	16.3	16.6	16.7	17.0	17.4
	6H	16.2	16.4	16.6	16.9	17.4	16.2	16.4	16.6	16.9	17.4
	8H	16.1	16.4	16.6	16.8	17.3	16.1	16.4	16.6	16.8	17.3
	12H	16.1	16.3	16.6	16.8	17.3	16.1	16.3	16.6	16.8	17.3
12H	4H	16.2	16.5	16.7	16.9	17.4	16.2	16.5	16.7	16.9	17.4
	6H	16.1	16.4	16.6	16.8	17.3	16.1	16.4	16.6	16.8	17.3
	8H	16.1	16.3	16.6	16.8	17.3	16.1	16.3	16.6	16.8	17.3
Variations with the observer position at spacing:											
S =	1.0H	5.0 / -17.5					5.0 / -17.5				
	1.5H	7.8 / -17.7					7.8 / -17.7				
	2.0H	9.8 / -18.0					9.8 / -18.0				