


## View Opti Beam Lens rotondo

Design iGuzzini / Arup

iGuzzini

Last information update: May 2018



### round small body spotlight - WW

**Product code**  
Q295

#### Technical description

Indoor adjustable spotlight with adapter for installation on a three-phase/DALI track. Device made of die-cast aluminium and a front part made of a thermoplastic material. Spotlight double adjustability allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. Optical assembly consisting of Warm White tone 3000K CRI90 LEDs with OPTIBEAM LENS technology and wall-washer light distribution for homogeneous vertical wall lighting. Dimmable DALI driver built-in to box with a semi-hidden system on track. Option of installing a range of flat accessories including an OPTIBEAM REFRACTOR for varying light distribution, a louver, a soft lens and an outdoor accessory like an asymmetric visor for eliminating stray light dispersion on the ceiling.

#### Installation

On a three-phase/DALI electrified track

**Dimension (mm)**  
Ø126x164

**Colour**  
Black (04) | Black/White (47)

**Weight (Kg)**  
1.08

**Mounting**  
dali track|three circuit track

#### Wiring

Product complete with DALI dimmable components, housed in a semi-hidden box on the track.

Complies with EN60598-1 and pertinent regulations



IP20



pending

#### Product configuration: Q295

##### Product characteristics

Total lighting output [Lm]: 1311  
Total power [W]: 21.3  
Luminous efficacy [Lm/W]: 61.5  
Life Time: > 50,000h - L80 - B10 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 0  
Emergency luminous flux [Lm]: /  
Voltage [V]: -  
Number of optical assemblies: 1

##### Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 69  
Lamp code: LED  
ZVEI Code: LED  
Nominal power [W]: 18  
Nominal luminous [Lm]: 1900  
Lamp maximum intensity [cd]: /  
Beam angle [°]: /

Number of lamps for optical assembly: 1  
Socket: /  
Ballast losses [W]: 3.3  
Colour temperature [K]: 3000  
CRI: 90  
Wavelength [Nm]: /  
MacAdam Step: 2

Polar

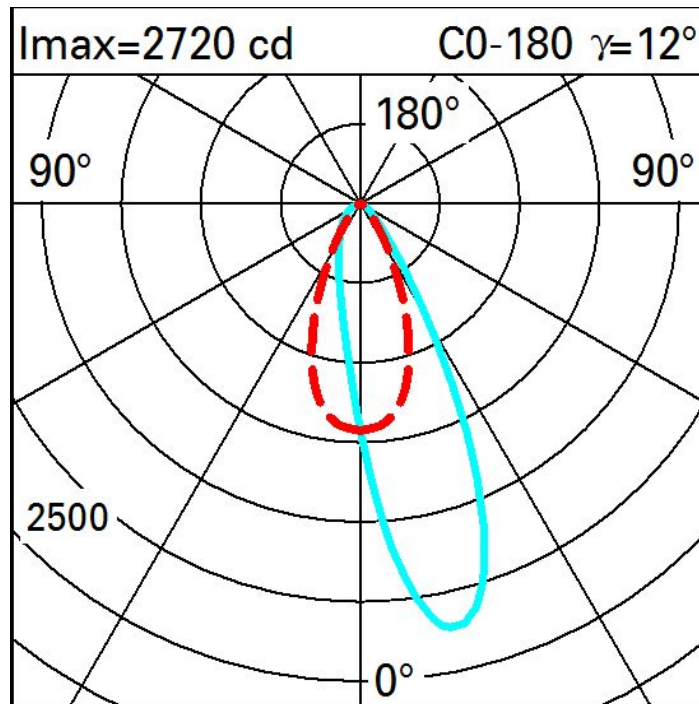

Illuminances

Lux												Wall distance = 1m	
3													
	0.4	1	3	8	11	9	6	3	0.8	0.3	0.1		
2	2	4	10	22	28	23	17	7	2	0.9	0.4		
	3	6	13	26	37	41	35	15	5	2	0.8		
1	4	6	12	22	33	48	53	26	8	3	1		
	3	6	10	17	25	42	52	35	13	5	2		
0													
	m	-2	-1	0	1	2	3						