



Last information update: June 2018

**Frame 4 cells - Wideflood beam - LED****Product code**

Q475

Technical description

Square miniaturised recessed luminaire with 4 optical elements for LED lamps - fixed optics. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient flow and a high level of visual comfort. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised, thermoplastic, high definition Opti Beam reflectors, integrated in a set-back position in the anti-glare screen. Ballast not included, available with separate code.

Installation

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 42 x 42.

Dimension (mm)

46x46x50

Colour

White (01) | White/Brass (41) | Black/Black (43) | Black/White (47) | Grey/Black (74) | (E7)

Weight (Kg)

0.11

Mounting

wall recessed|ceiling recessed

Wiring

Direct current ballasts to be ordered separately: ON-OFF - code no. MXF9 (min 1 / max 2); dimmable DALI - code no. BZM4 (min 1 / max 5) - check the instruction sheet for the lengths and compatible cross-sections of the cables to be used.

Notes

.

Complies with EN60598-1 and pertinent regulations



IP20



pending

Product configuration: Q475**Product characteristics**

Total lighting output [Lm]: 573
Total power [W]: 7.8
Luminous efficacy [Lm/W]: 73.4
Life Time: > 50,000h - L80 - B10 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 0
Emergency luminous flux [Lm]: /
Voltage [V]: -
Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 83
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 7.8
Nominal luminous [Lm]: 690
Lamp maximum intensity [cd]: /
Beam angle [°]: 58°

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 0
Colour temperature [K]: 4000
CRI: 90
Wavelength [Nm]: /
MacAdam Step: 3


Polar

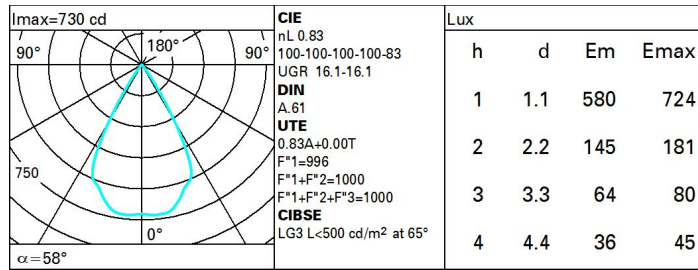

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	79	77	76	78	77	76	73	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	86	85	83	100

Luminance curve limit

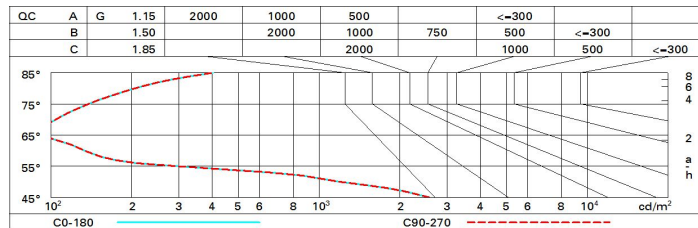

UGR diagram

Corrected UGR values (at 690 lm bare lamp luminous flux)											
Reflect.:		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	16.7	17.3	17.0	17.5	17.8	16.7	17.3	17.0	17.5	17.8
	3H	16.6	17.1	16.9	17.4	17.7	16.6	17.1	16.9	17.4	17.7
	4H	16.5	17.0	16.8	17.3	17.6	16.5	17.0	16.8	17.3	17.6
	6H	16.4	16.9	16.8	17.2	17.5	16.4	16.9	16.8	17.2	17.5
	8H	16.4	16.8	16.8	17.2	17.5	16.4	16.8	16.8	17.2	17.5
	12H	16.4	16.8	16.7	17.1	17.5	16.4	16.8	16.7	17.1	17.5
4H	2H	16.5	17.0	16.8	17.3	17.6	16.5	17.0	16.8	17.3	17.6
	3H	16.4	16.8	16.7	17.1	17.5	16.4	16.8	16.7	17.1	17.5
	4H	16.3	16.6	16.7	17.0	17.4	16.3	16.6	16.7	17.0	17.4
	6H	16.2	16.5	16.6	16.9	17.3	16.2	16.5	16.6	16.9	17.3
	8H	16.1	16.4	16.6	16.8	17.3	16.1	16.4	16.6	16.8	17.3
	12H	16.1	16.3	16.5	16.8	17.2	16.1	16.3	16.5	16.8	17.2
8H	4H	16.1	16.4	16.6	16.8	17.3	16.1	16.4	16.6	16.8	17.3
	6H	16.0	16.3	16.5	16.7	17.2	16.0	16.3	16.5	16.7	17.2
	8H	16.0	16.2	16.5	16.7	17.2	16.0	16.2	16.5	16.7	17.2
	12H	15.9	16.1	16.4	16.6	17.1	15.9	16.1	16.4	16.6	17.1
12H	4H	16.1	16.3	16.5	16.8	17.2	16.1	16.3	16.5	16.8	17.2
	6H	16.0	16.2	16.5	16.7	17.2	16.0	16.2	16.5	16.7	17.2
	8H	15.9	16.1	16.4	16.6	17.1	15.9	16.1	16.4	16.6	17.1
Variations with the observer position at spacing:											
S =	1.0H	6.5 / -24.9					6.5 / -24.9				
	1.5H	9.4 / -25.6					9.4 / -25.6				
	2.0H	11.4 / -25.8					11.4 / -25.8				