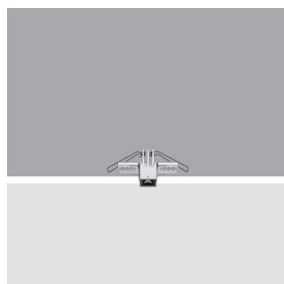


Last information update: June 2018

**Minimal 1 cell - Flood beam - LED****Product code**

Q526

**Technical description**

Square miniaturised recessed luminaire for a single LED lamp - fixed optic. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient flow and a high level of controlled glare visual comfort. Main body with die-cast zamak radiant surface, minimal (frameless) version for mounting flush with the ceiling. Metallised, thermoplastic, high definition Opti Beam reflector, integrated in a set-back position in the anti-glare screen. Ballast not included, available with separate code.

**Installation**

Recessed with steel wire springs on the specific adapter (included) which allows flush-mounting with the ceiling. Adapter fixed to false ceiling (compatible thicknesses of 12.5 / 15 / 20 mm) with screws; subsequent filling and smoothing operations; insertion of luminaire body and aesthetic end finishing. A special protective sheath allows finishing operations on the plasterboard to be simplified and speeded up. Preparation hole 28 x 28.

**Dimension (mm)**

25x25x51

**Colour**

White (01) | Black (04) | Brass (14) | (E6)

**Weight (Kg)**

0.07

**Mounting**

wall recessed|ceiling recessed

**Wiring**

Direct current ballasts to be ordered separately: ON-OFF - code no. MXF9 (min 1 / max 8); dimmable DALI - code no. BZM4 (min 2 / max 20) - check the instruction sheet for the lengths and compatible cross-sections of the cables to be used.

**Notes**

The special steel wire spring provided is required to facilitate the eventual extraction of the recessed body once it has been inserted.

Complies with EN60598-1 and pertinent regulations



IP20

**Product configuration: Q526****Product characteristics**

Total lighting output [Lm]: 128

Total power [W]: 2

Luminous efficacy [Lm/W]: 64

Life Time: &gt; 50,000h - L80 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 0

Emergency luminous flux [Lm]: /

Voltage [V]: -

Number of optical assemblies: 1

**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 80

Lamp code: LED

ZVEI Code: LED

Nominal power [W]: 2

Nominal luminous [Lm]: 160

Lamp maximum intensity [cd]: /

Beam angle [°]: 42°

Number of lamps for optical assembly: 1

Socket: /

Ballast losses [W]: 0


Colour temperature [K]: 2700

CRI: 90

Wavelength [Nm]: /

MacAdam Step: 3


# Polar

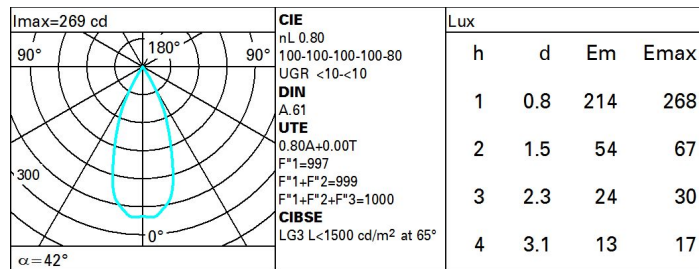

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	69	66	64	68	66	65	63	78
1.0	75	72	70	68	71	69	69	66	83
1.5	79	77	75	73	76	74	73	71	89
2.0	82	80	78	77	79	77	76	74	93
2.5	83	82	81	80	81	80	79	77	96
3.0	84	83	82	82	82	81	80	78	98
4.0	85	84	84	83	83	83	81	79	99
5.0	86	85	85	84	84	83	82	80	100

# Luminance curve limit

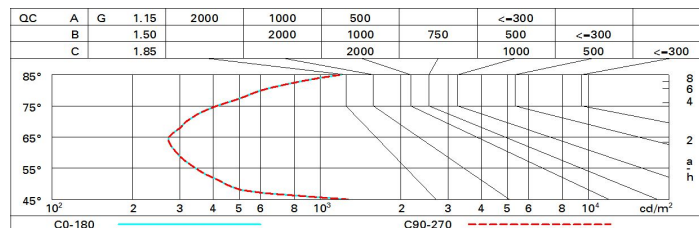

# UGR diagram

Corrected UGR values (at 100 lm bare lamp luminous flux)												
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
		viewed crosswise					viewed endwise					
2H	2H	7.6	8.2	7.9	8.4	8.6	7.6	8.2	7.9	8.4	8.6	
	3H	7.5	8.0	7.8	8.3	8.5	7.5	8.0	7.8	8.2	8.5	
	4H	7.4	7.9	7.7	8.2	8.5	7.4	7.9	7.7	8.2	8.5	
	6H	7.3	7.8	7.7	8.1	8.4	7.3	7.8	7.7	8.1	8.4	
	8H	7.3	7.7	7.7	8.1	8.4	7.3	7.7	7.6	8.0	8.4	
	12H	7.3	7.7	7.7	8.1	8.4	7.2	7.6	7.6	8.0	8.3	
4H	2H	7.4	7.9	7.7	8.2	8.5	7.4	7.9	7.7	8.2	8.5	
	3H	7.2	7.7	7.6	8.0	8.3	7.3	7.7	7.6	8.0	8.4	
	4H	7.2	7.5	7.6	7.9	8.3	7.2	7.5	7.6	7.9	8.3	
	6H	7.1	7.4	7.5	7.8	8.2	7.1	7.4	7.5	7.8	8.2	
	8H	7.1	7.4	7.5	7.8	8.2	7.0	7.3	7.5	7.8	8.2	
	12H	7.1	7.4	7.5	7.8	8.2	7.0	7.3	7.5	7.7	8.2	
8H	4H	7.0	7.3	7.5	7.8	8.2	7.1	7.4	7.5	7.8	8.2	
	6H	7.0	7.2	7.5	7.7	8.2	7.0	7.3	7.5	7.7	8.2	
	8H	7.0	7.2	7.5	7.7	8.2	7.0	7.2	7.5	7.7	8.2	
	12H	7.0	7.2	7.5	7.7	8.2	7.0	7.1	7.5	7.6	8.1	
12H	4H	7.0	7.3	7.5	7.7	8.2	7.1	7.4	7.5	7.8	8.2	
	6H	7.0	7.2	7.4	7.6	8.1	7.0	7.3	7.5	7.7	8.2	
	8H	7.0	7.1	7.5	7.6	8.1	7.0	7.2	7.5	7.7	8.2	
Variations with the observer position at spacing:												
S =		1.0H	6.7 / -8.9		6.7 / -8.9							
		1.5H	9.5 / -9.1		9.5 / -9.1							
		2.0H	11.5 / -9.3		11.5 / -9.3							