


Laser Blade XS

Design iGuzzini

iGuzzini

Last information update: June 2018

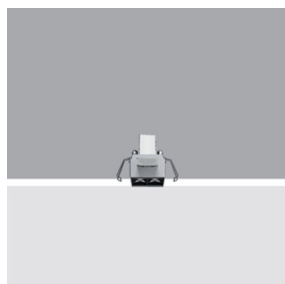

Minimal 2 cells - Medium beam - LED

Product code

Q528

Technical description

Linear miniaturised recessed luminaire with 2 optical elements for LED lamps - fixed optic. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient flow and a high level of controlled glare visual comfort. Main body with die-cast zamak radiant surface, minimal (frameless) version for mounting flush with the ceiling. Metallised, thermoplastic, high definition Opti Beam reflectors, integrated in a set-back position in the anti-glare screen. Ballast not included, available with separate code.

Installation

Recessed with steel wire springs on the specific adapter (included) which allows flush-mounting with the ceiling. Adapter fixed to false ceiling (compatible thicknesses of 12.5 / 15 / 20 mm) with screws; subsequent filling and smoothing operations; insertion of luminaire body and aesthetic end finishing. A special protective sheath allows finishing operations on the plasterboard to be simplified and speeded up. Preparation hole 28 x 41.

Dimension (mm)

39x25x50

Colour

White (01) | Black (04) | Brass (14) | (E6)

Weight (Kg)

0.11

Mounting

wall recessed|ceiling recessed

Wiring

Direct current ballasts to be ordered separately: ON-OFF - code no. MXF9 (min 1 / max 4); dimmable DALI - code no. BZM4 (min 1 / max 10) - check the instruction sheet for the lengths and compatible cross-sections of the cables to be used.

Notes

The special steel wire spring provided is required to facilitate the eventual extraction of the recessed body once it has been inserted.

Complies with EN60598-1 and pertinent regulations



IP20



Product configuration: Q528

Product characteristics


Total lighting output [Lm]: 243
Total power [W]: 3.9
Luminous efficacy [Lm/W]: 62.4
Life Time: > 50,000h - L80 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 0
Emergency luminous flux [Lm]: /
Voltage [V]: -
Number of optical assemblies: 1


Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 76
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 3.9
Nominal luminous [Lm]: 320
Lamp maximum intensity [cd]: /
Beam angle [°]: 24°

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 0
Colour temperature [K]: 3000
CRI: 90
Wavelength [Nm]: /
MacAdam Step: 3




Polar

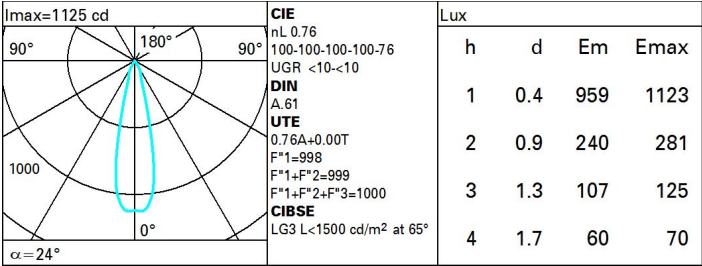

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	69	65	63	61	65	62	62	60	78
1.0	72	69	66	65	68	66	65	63	83
1.5	75	73	71	69	72	70	70	67	89
2.0	77	76	74	73	75	73	73	71	93
2.5	79	78	77	76	77	76	75	73	96
3.0	80	79	78	78	78	77	76	74	98
4.0	81	80	80	79	79	78	77	75	99
5.0	81	81	80	80	80	79	78	76	100

Luminance curve limit

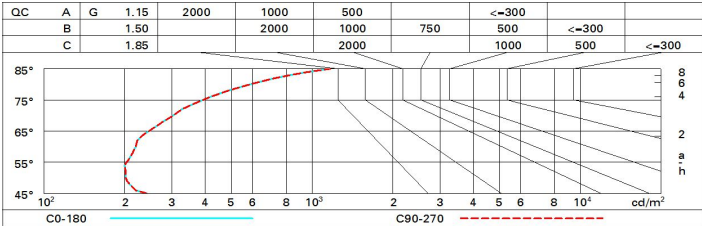

UGR diagram

Corrected UGR values (at 320 lm bare lamp luminous flux)												
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise					
2H	2H	3.7	5.8	4.1	6.1	6.5	3.7	5.8	4.1	6.1	6.5	
	3H	3.6	5.2	4.0	5.5	5.8	3.6	5.1	3.9	5.5	5.8	
	4H	3.5	4.9	3.9	5.2	5.5	3.5	4.8	3.9	5.1	5.5	
	6H	3.5	4.6	3.9	4.9	5.3	3.5	4.5	3.8	4.8	5.2	
	8H	3.5	4.6	3.9	4.9	5.3	3.4	4.4	3.8	4.8	5.1	
	12H	3.6	4.6	4.0	4.9	5.3	3.4	4.4	3.8	4.7	5.1	
4H	2H	3.5	4.8	3.9	5.1	5.5	3.5	4.9	3.9	5.2	5.5	
	3H	3.4	4.4	3.8	4.8	5.2	3.4	4.4	3.8	4.8	5.2	
	4H	3.3	4.3	3.7	4.7	5.1	3.3	4.3	3.7	4.7	5.1	
	6H	3.0	4.7	3.5	5.2	5.6	3.0	4.7	3.4	5.1	5.6	
	8H	3.0	4.9	3.5	5.3	5.8	2.8	4.7	3.3	5.2	5.7	
	12H	3.0	5.0	3.5	5.4	6.0	2.7	4.7	3.3	5.2	5.7	
8H	4H	2.8	4.7	3.3	5.2	5.7	3.0	4.9	3.5	5.3	5.8	
	6H	2.9	4.6	3.4	5.1	5.7	2.9	4.7	3.5	5.2	5.7	
	8H	3.0	4.5	3.5	5.0	5.6	3.0	4.5	3.5	5.0	5.6	
	12H	3.4	4.3	3.9	4.8	5.4	3.2	4.2	3.7	4.7	5.2	
12H	4H	2.7	4.7	3.3	5.2	5.7	3.0	5.0	3.5	5.4	6.0	
	6H	2.9	4.4	3.4	4.9	5.5	3.1	4.7	3.6	5.2	5.7	
	8H	3.2	4.2	3.7	4.7	5.2	3.4	4.3	3.9	4.8	5.4	
Variations with the observer position at spacing:												
S =		1.0H	6.3 / -5.9		6.3 / -5.9							
		1.5H	9.0 / -6.0		9.0 / -6.0							
		2.0H	11.0 / -6.1		11.0 / -6.1							