


Last information update: May 2018



Palco LV spotlight 2 x Ø 19 - medium beam

**Product code**  
Q627

**Technical description**  
Lighting assembly consisting of two miniaturised adjustable spotlights with adapter for installation on 48V low voltage track. Spotlight bodies made of die-cast zamak with a passive dissipation system. The adapter made of a thermoplastic material includes the DC/DC driver circuit with a DALI dimmable function. Integrated «power line» technology allows each spotlight mounted on the track to be regulated separately. In the model where the spotlights are mounted in pairs, any regulations are applied to both of them. The spotlight swivel joints allow the spotlight to be rotated by 360° and tilted by 90°. The set back position of the optic units guarantees a high level of visual comfort with thermoplastic high definition lenses. A rapid tool-free system for connecting the adapter electrically and mechanically to the track.

**Installation**  
Mechanical fastening with adapter on track.

**Dimension (mm)**  
Ø19


**Colour**  
White (01) | Black (04)

**Weight (Kg)**  
0.09

**Mounting**  
Low voltage track

**Wiring**  
Integrated DC/DC LED driver in adapter - direct connection on 48V track. Track power supply unit to be ordered separately.

Complies with EN60598-1 and pertinent regulations

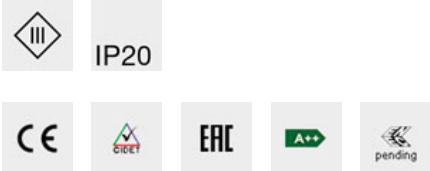

Product configuration: Q627

<b>Product characteristics</b>	
Total lighting output [Lm]: 214	Total luminous flux at or above an angle of 90° [Lm]: 0
Total power [W]: 5.4	Emergency luminous flux [Lm]: /
Luminous efficacy [Lm/W]: 39.7	Voltage [V]: -
Life Time: > 50,000h - L80 - B10 (Ta 25°C)	Number of optical assemblies: 2

<b>Optical assembly Characteristics Type 1</b>	
Light Output Ratio (L.O.R.) [%]: 67	Number of lamps for optical assembly: 1
Lamp code: LED	Socket: /
ZVEI Code: LED	Ballast losses [W]: 0.7
Nominal power [W]: 2	Colour temperature [K]: 3000
Nominal luminous [Lm]: 160	CRI: 90
Lamp maximum intensity [cd]: /	Wavelength [Nm]: /
Beam angle [°]: 24°	MacAdam Step: 3

**Polar**

