

Last information update: May 2018

**body 86 mm - warm White - WW****Product code**

Q679

Technical description

Adjustable spotlight with adapter for installation on a mains voltage track. Luminaire made of die-cast aluminium. Spotlight double adjustability allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. Mechanical aiming locks both for rotation about the vertical axis and tilting relative to the horizontal plane. Optical assembly made up of Warm White 3000K CRI90 high colour rendering C.o.B LEDs with OPTI BEAM REFLECTOR technology and a wall-washer light beam that creates a vertical downlight. Dimmable electronic driver built-in to box with a semi-hidden system on track.

Installation

on an electrified track or special base

Dimension (mm)

Ø86

Colour

White (01) | Black (04)

Weight (Kg)

0.91

Mounting

three circuit track pendant

Wiring

Dimmable electronic driver complete with Push Dim

Complies with EN60598-1 and pertinent regulations



IP20



CE



pending

Product configuration: Q679**Product characteristics**


Total lighting output [Lm]: 1292
 Total power [W]: 31.3
 Luminous efficacy [Lm/W]: 41.3
 Life Time: > 50,000h - L80 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 0
 Emergency luminous flux [Lm]: /
 Voltage [V]: -
 Number of optical assemblies: 1


Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 41
 Lamp code: LED
 ZVEI Code: LED
 Nominal power [W]: 27
 Nominal luminous [Lm]: 3150
 Lamp maximum intensity [cd]: /
 Beam angle [°]: /

Number of lamps for optical assembly: 1
 Socket: /
 Ballast losses [W]: 4.3
 Colour temperature [K]: 3000
 CRI: 90
 Wavelength [Nm]: /
 MacAdam Step: 2



Polar

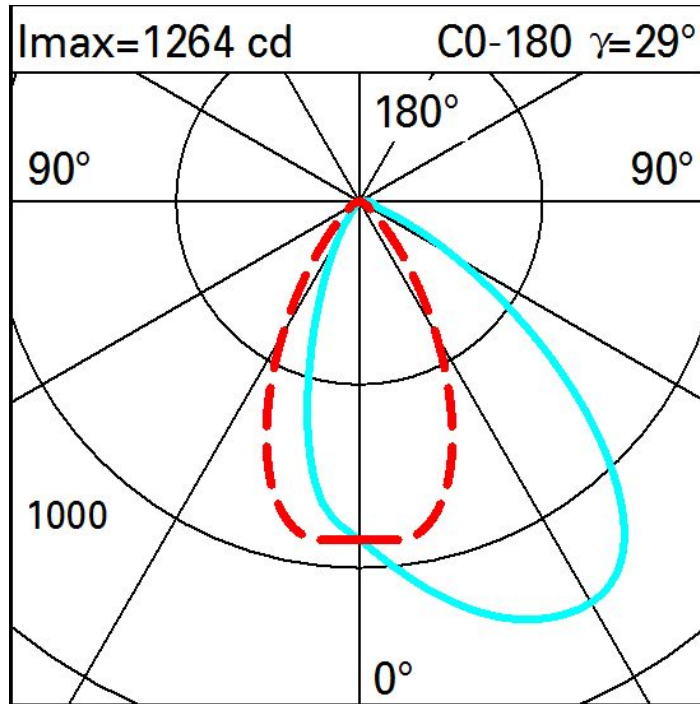

Illuminances

