


Last information update: May 2018

**Spotlight with base - Warm White Led - Class III - Very Wide Flood optic****Product code**

Q718

**Technical description**

Spotlight designed to use LED lamps and a Very Wide Flood optic. The optical assembly and base is made of EN1706AC 46100LF aluminium alloy and subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The following painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. 5 mm thick tempered sodium-calcium closing glass. Double adjustability allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. Mechanical aiming locks for rotation on both the vertical axis and horizontal plane. Complete with a monochrome LED circuit and an Opti Beam Reflector optic system. The product includes a PG13.5 cable gland. Black rubber outlet cable complete with anti-transpiration device. Electronic ballast to be ordered separately. Option of using optic accessories assembled via an accessory holder frame. All external screws used are made of A2 stainless steel.

**Installation**

Floor, wall, ceiling or ground-installed via a stake.

**Dimension (mm)**

Ø83

**Colour**

White (01) | Grey (15)

**Weight (Kg)**

1.3

**Mounting**

wall surface|ground spike

**Wiring**

The product is supplied with a black rubber outlet cable complete with anti-transpiration device L=1000mm.

Complies with EN60598-1 and pertinent regulations



IK08

IP66

**Product configuration: Q718****Product characteristics**

Total lighting output [Lm]: 1848  
Total power [W]: 16  
Luminous efficacy [Lm/W]: 115.5  
Life Time: 100,000h - L80 - B10 (Ta 25°C)  
Number of optical assemblies: 1

Total luminous flux at or above an angle of 90° [Lm]: 0  
Emergency luminous flux [Lm]: /  
Voltage [V]: -  
Ambient temperature range: from -20°C to +35°C. (\*)


\* Preliminary data

**Optical assembly Characteristics Type 1**


Light Output Ratio (L.O.R.) [%]: 84  
Lamp code: LED  
ZVEI Code: LED  
Nominal power [W]: 16  
Nominal luminous [Lm]: 2200  
Lamp maximum intensity [cd]: /  
Beam angle [°]: 78°

Number of lamps for optical assembly: 1  
Socket: /  
Ballast losses [W]: 0  
Colour temperature [K]: 2700  
CRI: 80  
Wavelength [Nm]: /  
MacAdam Step: 2

### Polar

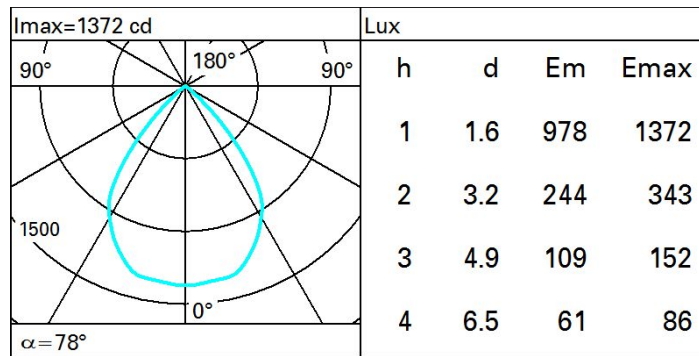

### Isolux

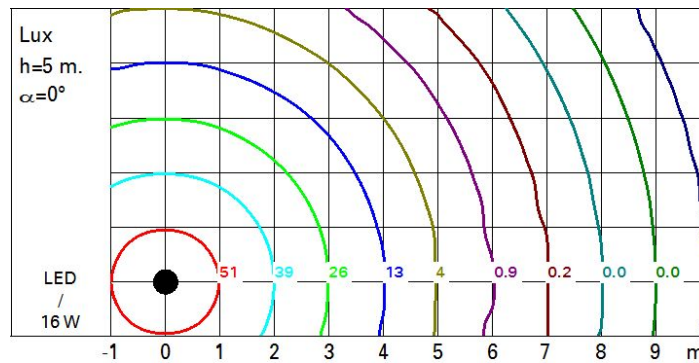

### UGR diagram

Corrected UGR values (at 2200 lm bare lamp luminous flux)												
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise					
2H	2H	26.2	26.9	26.5	27.2	27.4	26.2	26.9	26.5	27.2	27.4	27.4
	3H	26.1	26.7	26.4	27.0	27.3	26.1	26.7	26.4	27.0	27.3	27.3
	4H	26.0	26.6	26.3	26.9	27.2	26.0	26.6	26.3	26.9	27.2	27.2
	6H	25.9	26.5	26.3	26.8	27.1	25.9	26.5	26.3	26.8	27.1	27.1
	8H	25.9	26.4	26.2	26.7	27.1	25.9	26.4	26.2	26.7	27.1	27.1
	12H	25.8	26.3	26.2	26.7	27.0	25.8	26.3	26.2	26.7	27.0	27.0
4H	2H	26.0	26.6	26.3	26.9	27.2	26.0	26.6	26.3	26.9	27.2	27.2
	3H	25.8	26.3	26.2	26.7	27.0	25.8	26.3	26.2	26.7	27.0	27.0
	4H	25.7	26.2	26.1	26.6	27.0	25.7	26.2	26.1	26.6	27.0	27.0
	6H	25.7	26.1	26.1	26.4	26.9	25.7	26.1	26.1	26.4	26.9	26.9
	8H	25.6	26.0	26.1	26.4	26.8	25.6	26.0	26.1	26.4	26.8	26.8
	12H	25.6	25.9	26.0	26.3	26.8	25.6	25.9	26.0	26.3	26.8	26.8
8H	4H	25.6	26.0	26.1	26.4	26.8	25.6	26.0	26.1	26.4	26.8	26.8
	6H	25.5	25.8	26.0	26.3	26.7	25.5	25.8	26.0	26.3	26.7	26.7
	8H	25.5	25.7	26.0	26.2	26.7	25.5	25.7	26.0	26.2	26.7	26.7
	12H	25.4	25.6	25.9	26.1	26.6	25.4	25.6	25.9	26.1	26.6	26.6
12H	4H	25.6	25.9	26.0	26.3	26.8	25.6	25.9	26.0	26.3	26.8	26.8
	6H	25.5	25.7	26.0	26.2	26.7	25.5	25.7	26.0	26.2	26.7	26.7
	8H	25.4	25.6	25.9	26.1	26.6	25.4	25.6	25.9	26.1	26.6	26.6
Variations with the observer position at spacing:												
S =		3.2 / -16.6					3.2 / -16.6					
		5.5 / -23.3					5.5 / -23.3					
		7.5 / -25.3					7.5 / -25.3					