



Last information update: May 2018



**Ceiling-mounted LB XS square HC - 4 cells - Wide Flood beam - integrated driver**

**Product code**  
Q858

**Technical description**

Ceiling-mounted luminaire with 4 optical elements for LED lamps - fixed optics with metallised thermoplastic high definition Opti-Beam reflectors. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient luminous flux and a high level of controlled glare visual comfort. Extruded aluminium body - die-cast zamak technical dissipation unit - shaped steel fixing plate. ON-OFF driver integrated in luminaire body.

**Installation**

Ceiling-mounted with surface fixing plate (screws and screw anchors not included) - external locking system.

**Dimension (mm)**  
45x45x200

**Colour**

White (01) | White/Brass (41) | Black/Black (43) | (44) | Black/White (47) | (E7) | (F1)

**Weight (Kg)**  
0.41

**Mounting**

ceiling surface

**Wiring**

Cables supplied with quick-coupling terminals for connecting to power supply line.

Complies with EN60598-1 and pertinent regulations



**Product configuration: Q858**

**Product characteristics**

Total lighting output [Lm]: 548  
Total power [W]: 10.2  
Luminous efficacy [Lm/W]: 53.7  
Life Time: > 50,000h - L80 - B10 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 0  
Emergency luminous flux [Lm]: /  
Voltage [V]: 230  
Number of optical assemblies: 1

**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 83  
Lamp code: LED  
ZVEI Code: LED  
Nominal power [W]: 7.9  
Nominal luminous [Lm]: 660  
Lamp maximum intensity [cd]: /  
Beam angle [°]: 58°

Number of lamps for optical assembly: 1  
Socket: /  
Ballast losses [W]: 2.3  
Colour temperature [K]: 3000  
CRI: 90  
Wavelength [Nm]: /  
MacAdam Step: 3


**Polar**

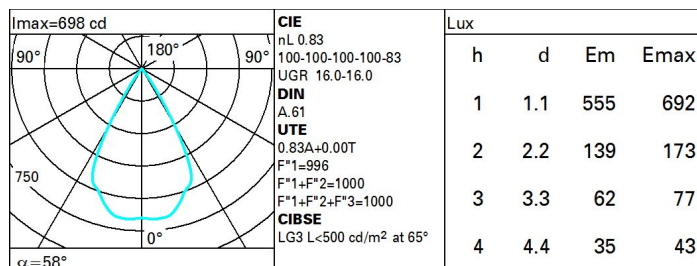

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	79	77	76	78	77	76	73	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	86	85	83	100

Luminance curve limit

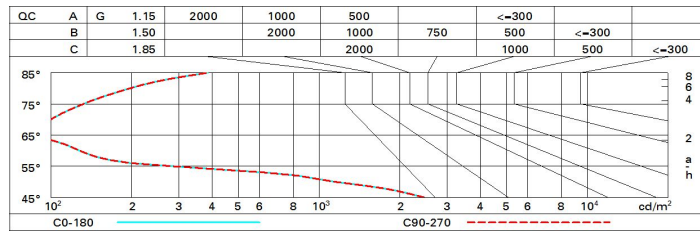

UGR diagram

Corrected UGR values (at 600 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling	walls	work pl.	Room dim	x	y						
0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.30	
2H	2H	16.6	17.2	16.8	17.4	17.6	16.6	17.2	16.8	17.4	17.6
	3H	16.4	17.0	16.7	17.2	17.5	16.4	17.0	16.7	17.2	17.5
	4H	16.4	16.9	16.7	17.1	17.4	16.4	16.9	16.7	17.1	17.4
	6H	16.3	16.7	16.6	17.0	17.4	16.3	16.7	16.6	17.0	17.4
	8H	16.2	16.7	16.6	17.0	17.3	16.2	16.7	16.6	17.0	17.3
	12H	16.2	16.6	16.6	17.0	17.3	16.2	16.6	16.6	17.0	17.3
4H	2H	16.4	16.9	16.7	17.1	17.4	16.4	16.9	16.7	17.1	17.4
	3H	16.2	16.6	16.6	17.0	17.3	16.2	16.6	16.6	17.0	17.3
	4H	16.1	16.5	16.5	16.8	17.2	16.1	16.5	16.5	16.8	17.2
	6H	16.0	16.3	16.4	16.7	17.2	16.0	16.3	16.4	16.7	17.2
	8H	16.0	16.3	16.4	16.7	17.1	16.0	16.3	16.4	16.7	17.1
	12H	15.9	16.2	16.4	16.6	17.1	15.9	16.2	16.4	16.6	17.1
8H	4H	16.0	16.3	16.4	16.7	17.1	16.0	16.3	16.4	16.7	17.1
	6H	15.9	16.1	16.4	16.6	17.0	15.9	16.1	16.4	16.6	17.0
	8H	15.8	16.0	16.3	16.5	17.0	15.8	16.0	16.3	16.5	17.0
	12H	15.8	16.0	16.3	16.4	17.0	15.8	16.0	16.3	16.4	17.0
12H	4H	15.9	16.2	16.4	16.6	17.1	15.9	16.2	16.4	16.6	17.1
	6H	15.8	16.0	16.3	16.5	17.0	15.8	16.0	16.3	16.5	17.0
	8H	15.8	16.0	16.3	16.4	17.0	15.8	16.0	16.3	16.4	17.0
Variations with the observer position at spacing:											
S =	1.0H	6.5 / -24.9					6.5 / -24.9				
	1.5H	9.4 / -25.6					9.4 / -25.6				
	2.0H	11.4 / -25.8					11.4 / -25.8				