


Last information update: May 2018



Frame recessed luminaire - 15 cells - General Lighting Pro - DALI

Product code

Q942

Technical description

Rectangular recessed luminaire with 15 optical elements for LED lamps - fixed optics with metallised thermoplastic high definition Opti-Beam reflectors, integrated in a set-back position in the anti-glare screen. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. The total white finish and the patented technology of the optic system guarantee an even and efficient luminous flux optimised by a special diffuser screen that reduces direct glare significantly. Supplied with DALI dimmable electronic control gear connected to the luminaire.

Installation

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 37 x 406.

Dimension (mm)

413x44x54

Colour

White (01)

Weight (Kg)

0.86

Mounting

wall recessed|ceiling recessed

Wiring

On control gear box with quick-coupling connections.

Complies with EN60598-1 and pertinent regulations

IP20 IP23



Product configuration: Q942

Product characteristics

Total lighting output [Lm]: 1987
Total power [W]: 31
Luminous efficacy [Lm/W]: 64.1
Number of optical assemblies: 1


Total luminous flux at or above an angle of 90° [Lm]: 0
Emergency luminous flux [Lm]: /
Voltage [V]: -

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 72
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 31
Nominal luminous [Lm]: 2760
Lamp maximum intensity [cd]: /
Beam angle [°]: /

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 0
Colour temperature [K]: 3000
CRI: 90
Wavelength [Nm]: /
MacAdam Step: 3


Polar

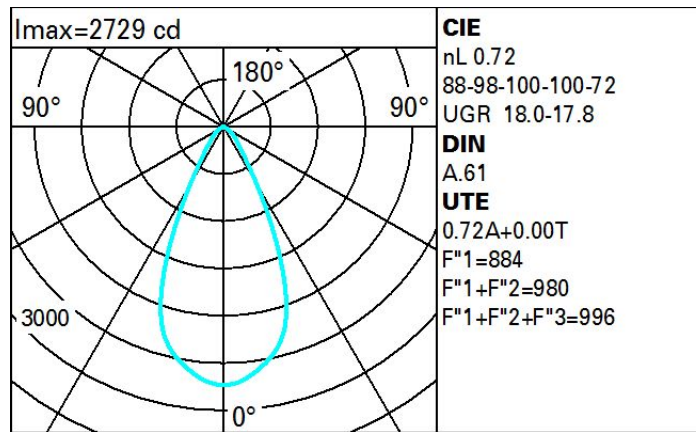

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	61	57	54	52	56	53	53	50	70
1.0	65	61	58	56	60	57	57	54	75
1.5	69	66	64	62	65	63	62	60	83
2.0	72	69	68	66	68	67	66	64	88
2.5	73	72	70	69	70	69	68	66	92
3.0	74	73	72	71	72	71	70	68	94
4.0	75	74	74	73	73	72	71	69	96
5.0	76	75	74	74	74	73	72	70	97

Luminance curve limit

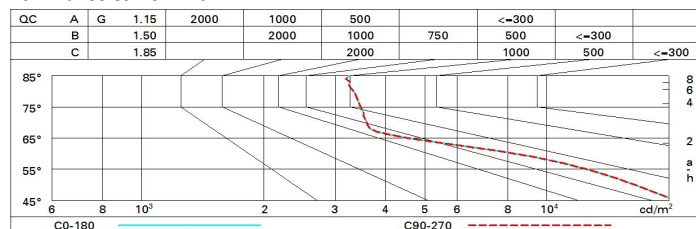

UGR diagram

Corrected UGR values (at 2700 lm bare lamp luminous flux)												
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise					
2H	2H	17.7	18.4	18.0	18.6	18.9	17.7	18.4	18.0	18.6	18.9	18.9
	3H	17.8	18.4	18.1	18.6	18.9	17.8	18.4	18.1	18.7	18.9	18.9
	4H	17.8	18.3	18.1	18.6	18.9	17.7	18.3	18.1	18.6	18.9	18.9
	6H	17.8	18.3	18.1	18.6	19.0	17.7	18.2	18.0	18.5	18.8	18.8
	8H	17.8	18.3	18.2	18.6	19.0	17.6	18.1	18.0	18.5	18.8	18.8
	12H	17.8	18.3	18.2	18.6	19.0	17.6	18.1	18.0	18.4	18.8	18.8
4H	2H	17.7	18.3	18.1	18.6	18.9	17.8	18.3	18.1	18.6	18.9	18.9
	3H	17.8	18.3	18.2	18.6	19.0	17.9	18.4	18.3	18.7	19.1	19.1
	4H	17.9	18.3	18.3	18.7	19.1	17.9	18.3	18.3	18.7	19.1	19.1
	6H	17.9	18.3	18.4	18.7	19.1	17.8	18.2	18.3	18.6	19.0	19.0
	8H	18.0	18.3	18.4	18.7	19.2	17.8	18.2	18.3	18.6	19.0	19.0
	12H	18.0	18.3	18.4	18.7	19.2	17.8	18.1	18.2	18.5	19.0	19.0
8H	4H	17.8	18.2	18.3	18.6	19.0	18.0	18.3	18.4	18.7	19.2	19.2
	6H	17.9	18.2	18.4	18.7	19.1	18.0	18.3	18.5	18.7	19.2	19.2
	8H	18.0	18.2	18.5	18.7	19.2	18.0	18.2	18.5	18.7	19.2	19.2
	12H	18.0	18.2	18.5	18.7	19.2	18.0	18.2	18.5	18.7	19.2	19.2
12H	4H	17.8	18.1	18.2	18.5	19.0	18.0	18.3	18.4	18.7	19.2	19.2
	6H	17.9	18.2	18.4	18.6	19.1	18.0	18.2	18.5	18.7	19.2	19.2
	8H	18.0	18.2	18.5	18.7	19.2	18.0	18.2	18.5	18.7	19.2	19.2
Variations with the observer position at spacing:												
S =		1.0H	1.5 / -1.5				1.5 / -1.5					
		1.5H	3.1 / -3.4				3.1 / -3.4					
		2.0H	4.9 / -4.6				4.9 / -4.6					