


Last information update: May 2018

**wall-washer luminaire - Ø 125 mm - warm white - minimal****Product code**

Q984

**Technical description**

Recessed round wall-washer luminaire designed to use a LED lamp with C.O.B. technology. Version without rim for mounting flush with ceiling. Reflector vacuum-metallised with aluminium vapours and finished with a protective anti-scratch layer to create a vertical downward beam of light. Die-cast aluminium body and passive dissipation system. Product complete with C.O.B. LED lamp in warm white colour tone 2700K (CRI 90).

**Installation**

Installation flush with the ceiling is for false ceilings 12.5 mm thick

**Dimension (mm)**

Ø140x124

**Colour**

Aluminium (12)

**Weight (Kg)**

1.32

**Mounting**

ceiling recessed

**Wiring**

product complete with DALI components

Complies with EN60598-1 and pertinent regulations

IP20 IP54

**Product configuration: Q984****Product characteristics**


Total lighting output [Lm]: 1595  
 Total power [W]: 30.9  
 Luminous efficacy [Lm/W]: 51.6  
 Life Time: > 50,000h - L80 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 0  
 Emergency luminous flux [Lm]: /  
 Voltage [V]: -  
 Number of optical assemblies: 1


**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 55  
 Lamp code: LED  
 ZVEI Code: LED  
 Nominal power [W]: 28  
 Nominal luminous [Lm]: 2900  
 Lamp maximum intensity [cd]: /  
 Beam angle [°]: /

Number of lamps for optical assembly: 1  
 Socket: /  
 Ballast losses [W]: 2.9  
 Colour temperature [K]: 2700  
 CRI: 90  
 Wavelength [Nm]: /  
 MacAdam Step: 2



Polar

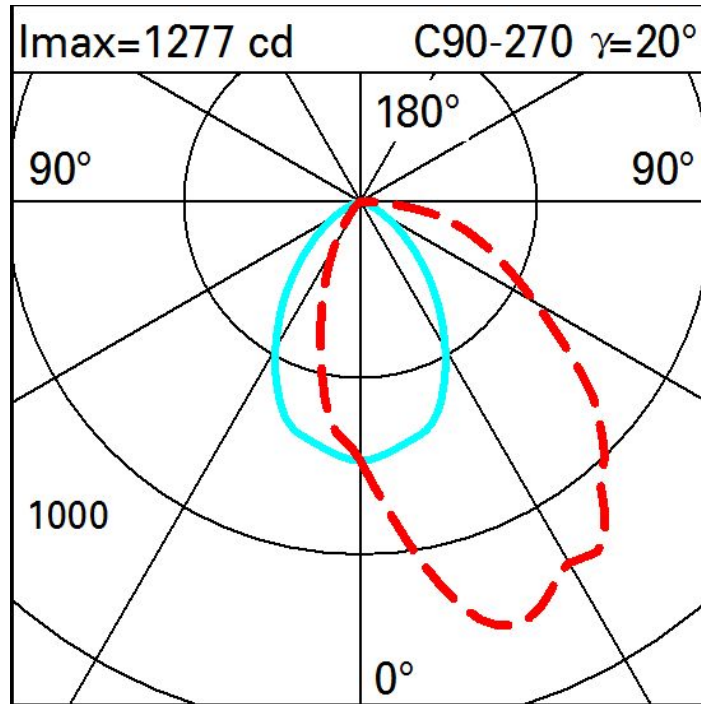

Illuminances

Lux      Wall distance = 1m

3						●					
	0.7	3	11	48	187	342	187	48	11	3	0.7
2	3	9	27	85	234	355	234	85	27	9	3
	6	14	35	84	154	218	154	84	35	14	6
1	7	16	32	59	91	116	91	59	32	16	7
	8	15	26	38	56	69	56	38	26	15	8
0											
	m	-2	-1	0	1	2	3				