

Last information update: May 2018



**adjustable luminaire - Ø 96 mm - warm white - medium optic - frame**

**Product code**  
Q985

**Technical description**

Round adjustable luminaire designed to use an LED lamp with C.O.B. technology in a warm white colour tone 2700K (CRI 90). Version with rim for surface-mounting. Painted, die-cast aluminium body. Lower reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Anodised aluminium upper reflector. Black, zinc-plated sheet steel bracket. The luminaire can be rotated 30° relative to the horizontal plane and 358° about the vertical axis. The luminaire is fitted with mechanical locks for light beam aiming. Painted extruded aluminium dissipater.

**Installation**

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

**Dimension (mm)**  
Ø109x132

**Colour**  
White/Aluminium (39)

**Weight (Kg)**  
0.49

**Mounting**  
ceiling recessed

**Wiring**  
Product complete with DALI components

Complies with EN60598-1 and pertinent regulations

IP20



**Product configuration: Q985**

**Product characteristics**

Total lighting output [Lm]: 665  
Total power [W]: 16.3  
Luminous efficacy [Lm/W]: 40.8  
Life Time: > 50,000h - L80 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 0  
Emergency luminous flux [Lm]: /  
Voltage [V]: -  
Number of optical assemblies: 1

**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 46  
Lamp code: LED  
ZVEI Code: LED  
Nominal power [W]: 14  
Nominal luminous [Lm]: 1450  
Lamp maximum intensity [cd]: /  
Beam angle [°]: 25°

Number of lamps for optical assembly: 1  
Socket: /  
Ballast losses [W]: 2.3  
Colour temperature [K]: 2700  
CRI: 90  
Wavelength [Nm]: /  
MacAdam Step: 2


**Polar**

<p>Imax=3033 cd C0-180 90° 180° 90° 3000 0° α=25°</p>	<p><b>CIE</b> nL 0.46 99-100-100-100-46 UGR &lt;10-&lt;10 <b>DIN</b> A.61 <b>UTE</b> 0.46A+0.00T F*1=995 F*1+F*2=1000 F*1+F*2+F*3=1000 <b>CIBSE</b> LG3 L&lt;200 cd/m² at 65°</p>	<b>Lux</b>				
		h	d1	d2	Em	E <sub>max</sub>
		2	0.9	0.9	571	758
		4	1.8	1.8	143	190
		6	2.7	2.7	63	84
8	3.5	3.5	36	47		

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	41	39	38	37	39	37	37	36	78
1.0	43	41	40	39	41	40	39	38	83
1.5	45	44	43	42	43	42	42	41	88
2.0	47	46	45	44	45	44	44	43	93
2.5	48	47	46	46	46	46	45	44	96
3.0	48	48	47	47	47	46	46	45	98
4.0	49	48	48	48	48	47	47	46	99
5.0	49	49	48	48	48	48	47	46	100

Luminance curve limit

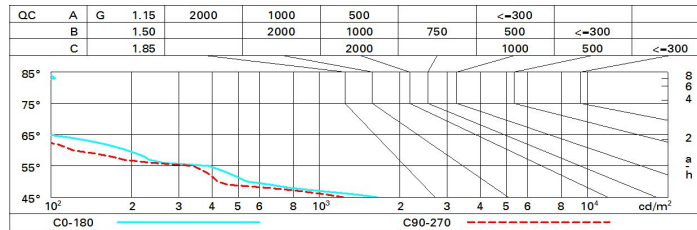

UGR diagram

Corrected UGR values (at 1450 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
X	Y										
2H	2H	0.2	2.4	0.6	2.7	3.1	-0.1	2.0	0.3	2.4	2.7
	3H	0.1	1.8	0.5	2.1	2.4	-0.2	1.4	0.1	1.8	2.1
	4H	0.0	1.4	0.4	1.8	2.1	-0.3	1.1	0.1	1.4	1.8
	6H	-0.0	1.1	0.4	1.4	1.8	-0.3	0.7	0.1	1.1	1.4
	8H	-0.0	1.0	0.4	1.3	1.7	-0.4	0.7	0.0	1.0	1.4
	12H	-0.1	0.9	0.3	1.3	1.7	-0.4	0.6	-0.0	1.0	1.3
4H	2H	0.0	1.4	0.4	1.8	2.1	-0.3	1.1	0.1	1.4	1.8
	3H	-0.1	0.9	0.3	1.3	1.7	-0.4	0.6	-0.0	1.0	1.3
	4H	-0.2	0.8	0.2	1.2	1.6	-0.5	0.4	-0.1	0.8	1.2
	6H	-0.6	1.1	-0.1	1.6	2.0	-0.9	0.8	-0.4	1.2	1.7
	8H	-0.7	1.2	-0.2	1.7	2.2	-1.0	0.9	-0.5	1.3	1.8
	12H	-0.8	1.2	-0.3	1.7	2.2	-1.1	0.8	-0.6	1.3	1.8
8H	4H	-0.7	1.2	-0.2	1.7	2.2	-1.0	0.9	-0.5	1.4	1.9
	6H	-0.8	1.0	-0.3	1.5	2.0	-1.1	0.7	-0.6	1.2	1.7
	8H	-0.8	0.8	-0.3	1.3	1.9	-1.2	0.5	-0.6	1.0	1.5
	12H	-0.7	0.4	-0.1	0.9	1.5	-1.0	0.1	-0.5	0.6	1.1
12H	4H	-0.8	1.2	-0.3	1.7	2.2	-1.1	0.9	-0.6	1.3	1.9
	6H	-0.8	0.8	-0.3	1.3	1.8	-1.2	0.5	-0.6	1.0	1.5
	8H	-0.7	0.4	-0.2	0.9	1.5	-1.0	0.1	-0.5	0.6	1.1
Variations with the observer position at spacing:											
S =	1.0H	3.9 / -8.6					4.4 / -9.8				
	1.5H	6.7 / -13.5					7.2 / -11.8				
	2.0H	8.6 / -13.5					9.2 / -14.1				