



Last information update: June 2018

**Fixed round recessed luminaire - Minimal - Warm Dimming - wide flood - Super Comfort****Product code**

QA62

Technical description

Minimal round recessed luminaire (frameless). Super Comfort fixed version: the LEDs are set a long way back to minimize glare and guarantee a high level of visual comfort. The main body is made of die-cast aluminium with a radiant surface that guarantees optimum heat dissipation. Metallised, thermoplastic, high definition reflector - wide flood optic. Die-cast aluminium structure designed for flush with ceiling installation - a specific adapter with a separate code is available for false ceilings. This is indispensable for installing recessed luminaires. The internal ring is made of thermoplastic available in a range of painted and metallised finishes. Safety glass included Warm Dimming LED lamp: when the lamp is dimmed the colour temperature varies from 2700K to 1800K in order to maintain a comfortable light effect and a high color rendering index. Power unit available with a separate code no.

Installation

The luminaire is recessed in the adapter (QA82) by means of an anti-fall steel wire spring, previously installed on the ceiling that can be between 12.5 and 25 mm thick. A special steel spring required to extract the main body of the adapter after it has been installed is included in the package.

Dimension (mm)

Ø68x91

Colour

White (01) | Black (04) | Chrome (10) | Brass (14) | (E6) | (E8)

Weight (Kg)

0.13

Mounting

ceiling recessed

Wiring

DALI dimmable direct current ballast available with a separate code - the recessed fitting includes a cable and a quick-coupling connector to connect it to the connector on the ballast.

Notes

A wide range of decorative accessories and diffusers is available.

Complies with EN60598-1 and pertinent regulations



IP20

**Product configuration: QA62.01+QA82.04**

QA82.04: Frame / adapter for Minimal round fixed recessed luminaire Ø75 - Black

Product characteristics

Total lighting output [Lm]: 538
Total power [W]: 10
Luminous efficacy [Lm/W]: 53.8
Life Time: > 50,000h - L70 - B10 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 0
Emergency luminous flux [Lm]: /
Voltage [V]: -
Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 84
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 10
Nominal luminous [Lm]: 640
Lamp maximum intensity [cd]: /
Beam angle [°]: 53° / 56°

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 0
Colour temperature [K]: /
CRI: 90
Wavelength [Nm]: /
MacAdam Step: 3


Polar

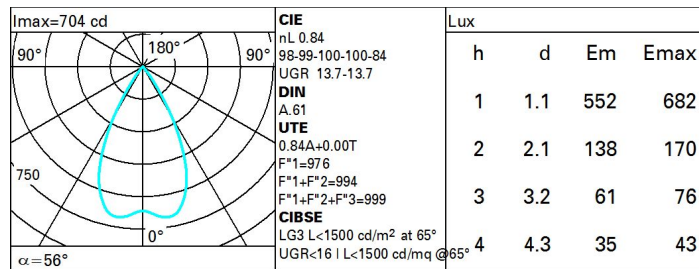

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	67	64	77
1.0	78	75	72	70	74	71	71	68	81
1.5	83	80	78	76	79	77	76	73	87
2.0	85	83	82	80	82	81	80	77	92
2.5	87	85	84	83	84	83	82	80	95
3.0	88	87	86	85	85	85	84	81	97
4.0	89	88	88	87	87	86	85	83	99
5.0	90	89	88	88	88	87	86	84	100

Luminance curve limit

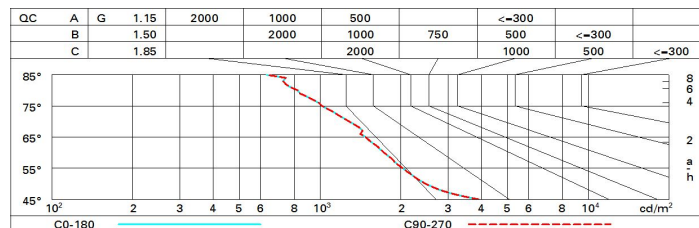

UGR diagram

Corrected UGR values (at 640 lm bare lamp luminous flux)												
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise					
2H	2H	14.1	14.7	14.3	14.9	15.1	14.1	14.7	14.3	14.9	15.1	
	3H	14.0	14.5	14.3	14.8	15.1	14.0	14.5	14.3	14.8	15.0	
	4H	13.9	14.5	14.3	14.7	15.0	13.9	14.4	14.2	14.7	15.0	
	6H	13.9	14.4	14.2	14.7	15.0	13.8	14.3	14.2	14.6	14.9	
	8H	13.9	14.3	14.2	14.6	15.0	13.8	14.2	14.1	14.6	14.9	
	12H	13.8	14.3	14.2	14.6	14.9	13.7	14.2	14.1	14.5	14.9	
4H	2H	13.9	14.4	14.2	14.7	15.0	13.9	14.5	14.3	14.7	15.0	
	3H	13.8	14.3	14.2	14.6	15.0	13.8	14.3	14.2	14.6	15.0	
	4H	13.8	14.2	14.2	14.5	14.9	13.8	14.2	14.2	14.5	14.9	
	6H	13.7	14.1	14.2	14.5	14.9	13.7	14.0	14.1	14.4	14.9	
	8H	13.7	14.0	14.1	14.4	14.9	13.7	14.0	14.1	14.4	14.8	
	12H	13.7	13.9	14.1	14.4	14.8	13.6	13.9	14.1	14.3	14.8	
8H	4H	13.7	14.0	14.1	14.4	14.8	13.7	14.0	14.1	14.4	14.9	
	6H	13.6	13.9	14.1	14.3	14.8	13.6	13.9	14.1	14.3	14.8	
	8H	13.6	13.8	14.1	14.3	14.8	13.6	13.8	14.1	14.3	14.8	
	12H	13.6	13.7	14.1	14.2	14.7	13.6	13.7	14.1	14.2	14.7	
12H	4H	13.6	13.9	14.1	14.3	14.8	13.7	13.9	14.1	14.4	14.8	
	6H	13.6	13.8	14.1	14.3	14.8	13.6	13.8	14.1	14.3	14.8	
	8H	13.6	13.7	14.1	14.2	14.7	13.6	13.7	14.1	14.2	14.7	
Variations with the observer position at spacing:												
S =		1.0H	5.7 / -7.2				5.7 / -7.2					
		1.5H	8.5 / -7.9				8.5 / -7.9					
		2.0H	10.5 / -8.2				10.5 / -8.2					