



Last information update: June 2018



## Palco linear recess 2 x Ø51 - flood - remote driver

### Product code

QC31

### Technical description

Linear luminaire for recessed installation with 2 miniaturised adjustable spotlights. Spotlight bodies with a die-cast aluminium dissipation system - cast zamak rotation units - a linear recess structure consisting of an extruded aluminium internal profile, painted steel caps and stop plate - steel wire fixing springs. The spotlight swivel joints allow the spotlight to be rotated by 360° and tilted by 90°. The set back position of the optic units guarantees a high level of visual comfort with thermoplastic high definition lenses. Ballast not included, available with separate code.

### Installation

Recessed linear base with surface stop plate - steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole Ø0 x 000 mm. Option of installing next to linear versions so as to create a continuous line.

### Dimension (mm)

Ø51

### Colour

White (01) | Black (04)

### Weight (Kg)

0.06

### Mounting

wall recessed|ceiling recessed

### Wiring

Output cables for connecting to power supply line.

### Notes

Technical and anti-glare accessories available.

Complies with EN60598-1 and pertinent regulations



IP20



### Product configuration: QC31

#### Product characteristics

Total lighting output [Lm]: 1034  
Total power [W]: 24  
Luminous efficacy [Lm/W]: 43.1  
Life Time: 50,000h - L80 - B10 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 0  
Emergency luminous flux [Lm]: /  
Voltage [V]: -  
Number of optical assemblies: 2

#### Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 68  
Lamp code: LED  
ZVEI Code: LED  
Nominal power [W]: 12  
Nominal luminous [Lm]: 760  
Lamp maximum intensity [cd]: /  
Beam angle [°]: 42°

Number of lamps for optical assembly: 1  
Socket: /  
Ballast losses [W]: 0  
Colour temperature [K]: 2700  
CRI: 90  
Wavelength [Nm]: /  
MacAdam Step: 3


# Polar

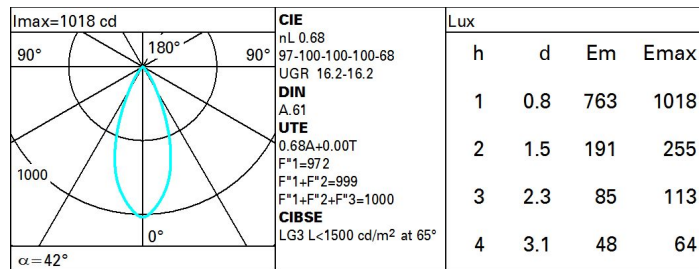

# Utilisation factors

| R    | 77 | 75 | 73 | 71 | 55 | 53 | 33 | 00 | DRR |
|------|----|----|----|----|----|----|----|----|-----|
| K0.8 | 61 | 57 | 55 | 53 | 57 | 55 | 54 | 52 | 76  |
| 1.0  | 63 | 60 | 58 | 57 | 60 | 58 | 57 | 55 | 81  |
| 1.5  | 67 | 65 | 63 | 61 | 64 | 62 | 62 | 59 | 87  |
| 2.0  | 69 | 67 | 66 | 65 | 66 | 65 | 64 | 63 | 92  |
| 2.5  | 70 | 69 | 68 | 67 | 68 | 67 | 66 | 65 | 95  |
| 3.0  | 71 | 70 | 70 | 69 | 69 | 69 | 68 | 66 | 97  |
| 4.0  | 72 | 71 | 71 | 70 | 70 | 70 | 69 | 67 | 99  |
| 5.0  | 72 | 72 | 72 | 71 | 71 | 71 | 69 | 68 | 100 |

# Luminance curve limit

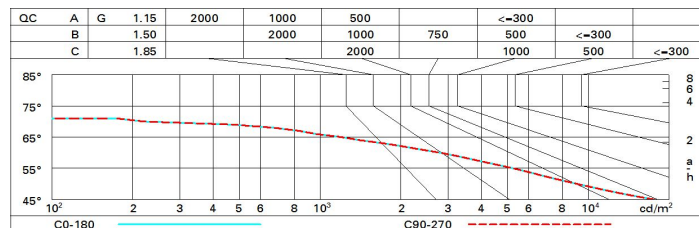

# UGR diagram

| Corrected UGR values (at 700 lm bare lamp luminous flux)         |     |                     |             |      |      |      |                   |             |      |      |      |      |
|--|-----|---------------------|-------------|------|------|------|-------------------|-------------|------|------|------|------|
| Reflect.:<br>ceiling/cav<br>walls<br>work pl.<br>Room dim<br>x y |     | 0.70                | 0.70        | 0.50 | 0.50 | 0.30 | 0.70              | 0.70        | 0.50 | 0.50 | 0.30 | 0.30 |
|  |     | 0.50                | 0.30        | 0.50 | 0.30 | 0.30 | 0.50              | 0.30        | 0.50 | 0.30 | 0.30 | 0.30 |
|  |     | 0.20                | 0.20        | 0.20 | 0.20 | 0.20 | 0.20              | 0.20        | 0.20 | 0.20 | 0.20 | 0.20 |
|  |     | viewed<br>crosswise |             |      |      |      | viewed<br>endwise |             |      |      |      |      |
| 2H   | 2H  | 16.8                | 17.4        | 17.1 | 17.7 | 17.9 | 16.8              | 17.4        | 17.1 | 17.7 | 17.9 |      |
|  | 3H  | 16.7                | 17.2        | 17.0 | 17.5 | 17.8 | 16.7              | 17.2        | 17.0 | 17.5 | 17.8 |      |
|  | 4H  | 16.6                | 17.1        | 16.9 | 17.4 | 17.7 | 16.6              | 17.1        | 16.9 | 17.4 | 17.7 |      |
|  | 6H  | 16.5                | 17.0        | 16.9 | 17.3 | 17.6 | 16.5              | 17.0        | 16.9 | 17.3 | 17.7 |      |
|  | 8H  | 16.5                | 16.9        | 16.8 | 17.3 | 17.6 | 16.5              | 17.0        | 16.8 | 17.3 | 17.6 |      |
|  | 12H | 16.4                | 16.9        | 16.8 | 17.2 | 17.6 | 16.4              | 16.9        | 16.8 | 17.2 | 17.6 |      |
| 4H   | 2H  | 16.6                | 17.1        | 16.9 | 17.4 | 17.7 | 16.6              | 17.1        | 16.9 | 17.4 | 17.7 |      |
|  | 3H  | 16.4                | 16.9        | 16.8 | 17.2 | 17.6 | 16.4              | 16.9        | 16.8 | 17.2 | 17.6 |      |
|  | 4H  | 16.4                | 16.8        | 16.8 | 17.1 | 17.5 | 16.4              | 16.8        | 16.8 | 17.1 | 17.5 |      |
|  | 6H  | 16.3                | 16.6        | 16.7 | 17.0 | 17.4 | 16.3              | 16.6        | 16.7 | 17.0 | 17.4 |      |
|  | 8H  | 16.2                | 16.5        | 16.7 | 17.0 | 17.4 | 16.2              | 16.5        | 16.7 | 17.0 | 17.4 |      |
|  | 12H | 16.2                | 16.5        | 16.6 | 16.9 | 17.4 | 16.2              | 16.5        | 16.6 | 16.9 | 17.4 |      |
| 8H   | 4H  | 16.2                | 16.5        | 16.7 | 17.0 | 17.4 | 16.2              | 16.5        | 16.7 | 17.0 | 17.4 |      |
|  | 6H  | 16.1                | 16.4        | 16.6 | 16.8 | 17.3 | 16.1              | 16.4        | 16.6 | 16.8 | 17.3 |      |
|  | 8H  | 16.1                | 16.3        | 16.6 | 16.8 | 17.3 | 16.1              | 16.3        | 16.6 | 16.8 | 17.3 |      |
|  | 12H | 16.0                | 16.2        | 16.5 | 16.7 | 17.2 | 16.0              | 16.2        | 16.5 | 16.7 | 17.2 |      |
| 12H  | 4H  | 16.2                | 16.5        | 16.6 | 16.9 | 17.4 | 16.2              | 16.5        | 16.6 | 16.9 | 17.4 |      |
|  | 6H  | 16.1                | 16.3        | 16.6 | 16.8 | 17.3 | 16.1              | 16.3        | 16.6 | 16.8 | 17.3 |      |
|  | 8H  | 16.0                | 16.2        | 16.5 | 16.7 | 17.2 | 16.0              | 16.2        | 16.5 | 16.7 | 17.2 |      |
| Variations with the observer position at spacing:                |     |                     |             |      |      |      |                   |             |      |      |      |      |
| S =  |     | 1.0H                | 4.9 / -10.3 |      |      |      |                   | 4.9 / -10.3 |      |      |      |      |
|  |     | 1.5H                | 7.7 / -15.5 |      |      |      |                   | 7.7 / -15.5 |      |      |      |      |
|  |     | 2.0H                | 9.7 / -21.8 |      |      |      |                   | 9.7 / -21.8 |      |      |      |      |