

Last information update: June 2018



**Palco linear surface 3 x Ø51 - flood - remote driver**

**Product code**

QC55

**Technical description**

Linear luminaire for surface installation with 3 miniaturised adjustable spotlights. Spotlight bodies with a die-cast aluminium dissipation system - cast zamak rotation units - shaped steel fixing plate - extruded aluminium linear surface structure with mechanical coupling system - thermoplastic side end caps. The spotlight swivel joints allow the spotlight to be rotated by 360° and tilted by 90°. The set back position of the optic units guarantees a high level of visual comfort with thermoplastic high definition lenses. Ballast not included, available with separate code.

**Installation**

Installation surface plate fastening - structure attached using a mechanical locking mechanism - insertion of side end caps. This specific locking system can be installed next to linear versions so as to create a continuous external line.

**Dimension (mm)**

Ø51

**Colour**

White (01) | Black (04)

**Weight (Kg)**

0.06

**Mounting**

wall surface|ceiling surface

**Wiring**

Output cables for connecting to power supply line.

**Notes**

Technical and anti-glare accessories available.

Complies with EN60598-1 and pertinent regulations



IP20



**Product configuration: QC55**

**Product characteristics**


Total lighting output [Lm]: 1550  
 Total power [W]: 36  
 Luminous efficacy [Lm/W]: 43.1  
 Life Time: 50,000h - L80 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 0  
 Emergency luminous flux [Lm]: /  
 Voltage [V]: -  
 Number of optical assemblies: 3


**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 68  
 Lamp code: LED  
 ZVEI Code: LED  
 Nominal power [W]: 12  
 Nominal luminous [Lm]: 760  
 Lamp maximum intensity [cd]: /  
 Beam angle [°]: 42°

Number of lamps for optical assembly: 1  
 Socket: /  
 Ballast losses [W]: 0  
 Colour temperature [K]: 2700  
 CRI: 90  
 Wavelength [Nm]: /  
 MacAdam Step: 3




**Polar**

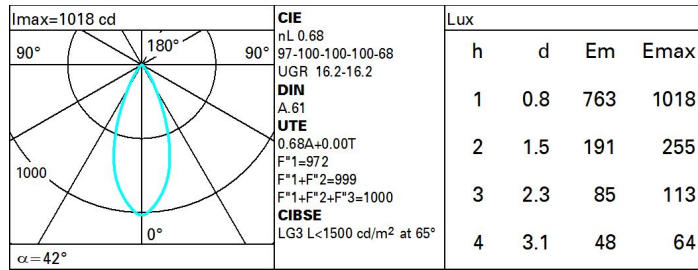

**Utilisation factors**

R	77	75	73	71	55	53	33	00	DRR
K0.8	61	57	55	53	57	55	54	52	76
1.0	63	60	58	57	60	58	57	55	81
1.5	67	65	63	61	64	62	62	59	87
2.0	69	67	66	65	66	65	64	63	92
2.5	70	69	68	67	68	67	66	65	95
3.0	71	70	70	69	69	69	68	66	97
4.0	72	71	71	70	70	70	69	67	99
5.0	72	72	72	71	71	71	69	68	100

**Luminance curve limit**

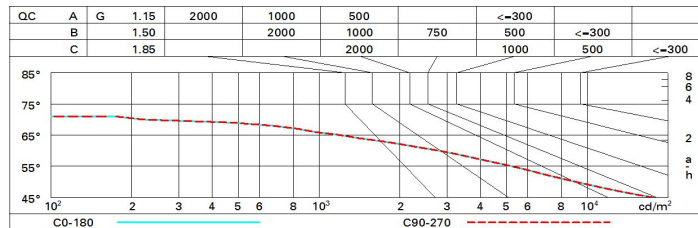

**UGR diagram**

Corrected UGR values (at 700 lm bare lamp luminous flux)											
Reflect.:		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	16.8	17.4	17.1	17.7	17.9	16.8	17.4	17.1	17.7	17.9
	3H	16.7	17.2	17.0	17.5	17.8	16.7	17.2	17.0	17.5	17.8
	4H	16.6	17.1	16.9	17.4	17.7	16.6	17.1	16.9	17.4	17.7
	6H	16.5	17.0	16.9	17.3	17.6	16.5	17.0	16.9	17.3	17.7
	8H	16.5	16.9	16.8	17.3	17.6	16.5	17.0	16.8	17.3	17.6
	12H	16.4	16.9	16.8	17.2	17.6	16.4	16.9	16.8	17.2	17.6
4H	2H	16.6	17.1	16.9	17.4	17.7	16.6	17.1	16.9	17.4	17.7
	3H	16.4	16.9	16.8	17.2	17.6	16.4	16.9	16.8	17.2	17.6
	4H	16.4	16.8	16.8	17.1	17.5	16.4	16.8	16.8	17.1	17.5
	6H	16.3	16.6	16.7	17.0	17.4	16.3	16.6	16.7	17.0	17.4
	8H	16.2	16.5	16.7	17.0	17.4	16.2	16.5	16.7	17.0	17.4
	12H	16.2	16.5	16.6	16.9	17.4	16.2	16.5	16.6	16.9	17.4
8H	4H	16.2	16.5	16.7	17.0	17.4	16.2	16.5	16.7	17.0	17.4
	6H	16.1	16.4	16.6	16.8	17.3	16.1	16.4	16.6	16.8	17.3
	8H	16.1	16.3	16.6	16.8	17.3	16.1	16.3	16.6	16.8	17.3
	12H	16.0	16.2	16.5	16.7	17.2	16.0	16.2	16.5	16.7	17.2
12H	4H	16.2	16.5	16.6	16.9	17.4	16.2	16.5	16.6	16.9	17.4
	6H	16.1	16.3	16.6	16.8	17.3	16.1	16.3	16.6	16.8	17.3
	8H	16.0	16.2	16.5	16.7	17.2	16.0	16.2	16.5	16.7	17.2
Variations with the observer position at spacing:											
S =	1.0H	4.9 / -10.3					4.9 / -10.3				
	1.5H	7.7 / -15.5					7.7 / -15.5				
	2.0H	9.7 / -21.8					9.7 / -21.8				