


Last information update: June 2018



Palco single surface Ø51 - flood - integrated driver

Product code
QC62

Technical description

Miniaturised adjustable spotlight for surface installation. Spotlight bodies with a die-cast aluminium dissipation system - cast zamak rotation unit - shaped steel fixing plate - extruded aluminium surface cover module with mechanical coupling system - thermoplastic side end caps. The swivel joints allow the spotlight to be rotated by 360° and tilted by 90°. The set back position of the optic unit guarantees a high level of visual comfort with a thermoplastic high definition lens. Ballast located inside cover module.

Installation

Installation surface plate fastening - structure attached using a mechanical locking mechanism - insertion of side end caps.

Dimension (mm)

Ø51

Colour

White (01) | Black (04)

Weight (Kg)

0.7

Mounting

wall surface|ceiling surface

Wiring

Quick-coupling connection on integrated driver terminals.

Notes

Technical and anti-glare accessories available.

Complies with EN60598-1 and pertinent regulations



IP20



Product configuration: QC62

Product characteristics

Total lighting output [Lm]: 551
Total power [W]: 15.8
Luminous efficacy [Lm/W]: 34.9
Life Time: 50,000h - L80 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 0
Emergency luminous flux [Lm]: /
Voltage [V]: -
Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 68
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 12
Nominal luminous [Lm]: 810
Lamp maximum intensity [cd]: /
Beam angle [°]: 42°

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 3.8
Colour temperature [K]: 3000
CRI: 90
Wavelength [Nm]: /
MacAdam Step: 3


Polar

Imax=1085 cd	CIE nL 0.68 97-100-100-100-68 UGR 16.4-16.4 DIN A.61 UTE 0.68A+0.00T F*1=972 F*1+F*2=999 F*1+F*2+F*3=1000 CIBSE LG3 L<1500 cd/m² at 65°	Lux			
		h	d	Em	Emax
90°		1	0.8	814	1085
180°		2	1.5	203	271
1000		3	2.3	90	121
0°		4	3.1	51	68
α=42°					

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	61	57	55	53	57	55	54	52	76
1.0	63	60	58	57	60	58	57	55	81
1.5	67	65	63	61	64	62	62	59	87
2.0	69	67	66	65	66	65	64	63	92
2.5	70	69	68	67	68	67	66	65	95
3.0	71	70	70	69	69	69	68	66	97
4.0	72	71	71	70	70	70	69	67	99
5.0	72	72	72	71	71	71	69	68	100

Luminance curve limit

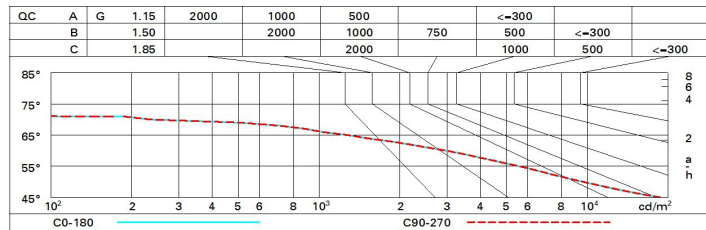

UGR diagram

Corrected UGR values (at 810 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	17.0	17.7	17.3	17.9	18.1	17.0	17.7	17.3	17.9	18.1
	3H	16.9	17.5	17.2	17.7	18.0	16.9	17.5	17.2	17.7	18.0
	4H	16.8	17.3	17.1	17.6	17.9	16.8	17.4	17.2	17.6	17.9
	6H	16.7	17.2	17.1	17.5	17.9	16.7	17.2	17.1	17.5	17.9
	8H	16.7	17.2	17.1	17.5	17.8	16.7	17.2	17.1	17.5	17.8
	12H	16.7	17.1	17.0	17.4	17.8	16.7	17.1	17.0	17.5	17.8
4H	2H	16.8	17.4	17.2	17.6	17.9	16.8	17.3	17.1	17.6	17.9
	3H	16.7	17.1	17.0	17.5	17.8	16.7	17.1	17.0	17.5	17.8
	4H	16.6	17.0	17.0	17.3	17.7	16.6	17.0	17.0	17.3	17.7
	6H	16.5	16.8	16.9	17.2	17.7	16.5	16.8	16.9	17.2	17.7
	8H	16.4	16.8	16.9	17.2	17.6	16.4	16.8	16.9	17.2	17.6
	12H	16.4	16.7	16.9	17.1	17.6	16.4	16.7	16.9	17.1	17.6
8H	4H	16.4	16.8	16.9	17.2	17.6	16.4	16.8	16.9	17.2	17.6
	6H	16.4	16.6	16.8	17.1	17.5	16.4	16.6	16.8	17.1	17.5
	8H	16.3	16.5	16.8	17.0	17.5	16.3	16.5	16.8	17.0	17.5
	12H	16.2	16.4	16.8	16.9	17.4	16.2	16.4	16.8	16.9	17.4
12H	4H	16.4	16.7	16.9	17.1	17.6	16.4	16.7	16.9	17.1	17.6
	6H	16.3	16.5	16.8	17.0	17.5	16.3	16.5	16.8	17.0	17.5
	8H	16.2	16.4	16.8	16.9	17.4	16.2	16.4	16.8	16.9	17.4
Variations with the observer position at spacing:											
S =	1.0H	4.9 / -10.3					4.9 / -10.3				
	1.5H	7.7 / -15.5					7.7 / -15.5				
	2.0H	9.7 / -21.8					9.7 / -21.8				