


## NUDE WALL IP55 1X LED GI

Nude, IP55 version is suited to be wall mounted at the entrance of a residence, featuring as lighting wall object, at the entry of a shop or outdoors of your favorite bar. Both downlight and up- and downlight versions are available. Variety in colours from black, white to alu structure.

Art. Nr. 10923032

### SPECIFICATIONS

Lamp	1x LED Array 6.2W
Gear / Transfo	LED gear incl.
Weight	1.49kg
Min. Distance	0.1 m
Power supply	230V
IP	IP55
Glow Wire Test	960°
Lifetime	L80 B20 @ 50.000 hrs
CRI	90
Lumen	321 Lm
Efficacy	40 Lm/W
UGR	9
Adjustability	Not Applicable

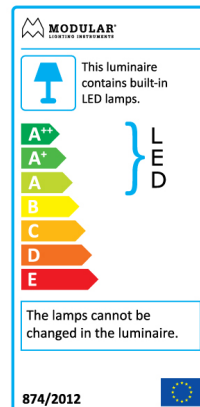

This label is available in other languages:  
<http://supermodular.com/assets/TYPE2.pdf>

	WARM WHITE 3000K / CRI 90+
	FLOOD 40°
alu struc	10923024
black struc	<b>10923032</b>
white struc	10923009

