
SMART LOTIS





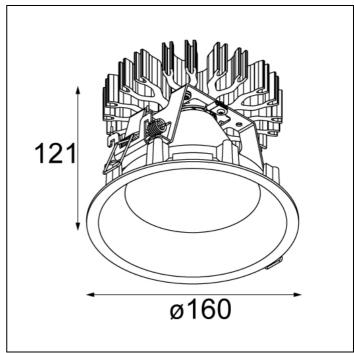

Art Nr 12015122

SMART LOTIS 160 DIFFUSE IP54 LED GE

Smart lotis is the best known fixture within the Smart family. The deeply recessed cone which holds the light source inspired the designers to create a very versatile spot to be combined with multiple accessories. This family's styling is based on our most popular designs. Concretely this means that the luminaires consist of a module (LED or halogen) which can be combined with one of three trims to suit your needs. The new spotlights can be combined with Smart mask, Smart surface box or Smart surface tubed to form the perfect solution for any interior. Choose a white, black or gold finishing. Also available in different sizes, fix and adjustable, IP version, ...

| Lamp | 1x LED Arra | a v | | | | |
|--|-----------------------------------|---------|---------|---------|-----------------------------|--------|
| Gear / Transfo | LED gear n | • | | | | |
| Cut-out size | ø 146 h 250 | | | | | |
| Weight | 0.88kg | | | | | |
| Min. Distance | 0.1 m | | | | | |
| IP | IP54 | | | | | |
| Glow Wire Test | 960° | | | | | |
| CRI | 90 | | | | | |
| Power supply | 500mA | 700 mA | 900mA | 1050mA | \1200m <i>A</i> | 1400m |
| | 32.1Vf | 33.6 Vf | 34.2Vf | 34.6Vf | 35 V f | 35.5Vf |
| Connected load | 16W | 23.5W | 30.8W | 36.3W | 42W | 49.7W |
| Lumen | 1370lm | 1866In | n2316In | n26791m | 3009lm | 3464Ir |
| Efficacy | 861m/W | 791m/W | /751m/W | /741m/W | 721m/W | 701m/V |
| UGR | 22 | 23 | 23 | 24 | 24 | 25 |
| Adjustability | Not | | | | | |
| | Applicable | | | | | |
| Remark | ! 3500K on | request | | | | |
| | ! can be combined with Smart mask | | | | | |
| MODULAR: This luminaire contains built-in | | | | | er languages ets/TYPE2.p | |
| LED lamps. A LE LED LAMPS. D LE LED LAMPS. LE LE | | | | | | |
| The lamps cannot be changed in the luminaire. | | | | | | |

| | WARM WHITE 2700K / CRI 90+ | WARM WHITE 3000K / CRI 90+ | NEUTRAL WHITE 4000K / CRI 90+ |
|-------------|-------------------------------|-------------------------------|----------------------------------|
| | WIDE FLOOD 80° | WIDE FLOOD 80° | WIDE FLOOD 80° |
| black struc | 13015032 | 13015132 | 13015232 |
| white struc | 13015009 | 13015109 | 13015209 |

Modular reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly. Latest datasheet and documentation available on www.supermodular.com.

19/12/2017 - ©2017 Modular Lighting Instruments

SMART LOTIS



SMART LOTIS 160 DIFFUSE IP54 LED GE

| ACCESSORIES | |
|-------------|---|
| HUE-MODULE | |
| 13190030 | MODULAR CONNECTED 1-10V WHITE COMPONENT |
| | |
| HUE-BRIDGE | |
| 70000616 | PHILIPS HUE BRIDGE EU |
| 70000617 | PHILIPS HUE BRIDGE UK |
| | |
| HUE-DEVICE | |
| 70000614 | PHILIPS HUE DIMMER SWITCH |
| 70000615 | PHILIPS HUE TAP SWITCH |
| 70000847 | PHILIPS HUE SENSOR |
| | |
| | |