


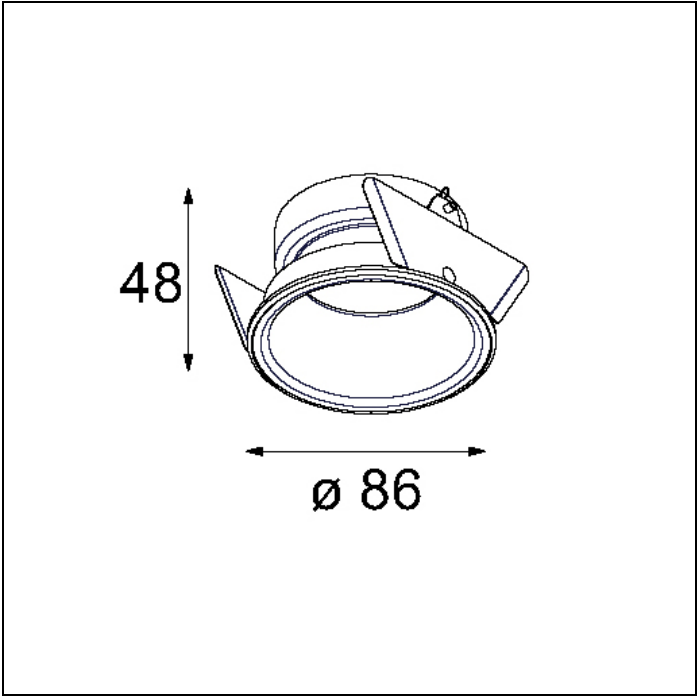

LOTIS 86 IP55 FOR LED GE

Lotis is the recessed spotlight which started it all. The hallmark of this luminaire, is the deeply recessed cone which holds the light source and has a fine edge. Lotis comes in different diameters and with different lighting sources. Lotis 48 is particularly fitted to use in wall mounted application.

Art. Nr. 13090028

SPECIFICATIONS

Lamp	1x LED (not incl.)
Gear / Transfo	LED gear not incl.
Cut-out size	ø 79 h 100
Weight	0.16kg
Min. Distance	0.1
Power supply	
IP	IP55
Glow Wire Test	960°
Adjustability	Not Applicable
Remark	! must be used with M-LED 50

alu struc	13090028
black struc	13090008
white struc	13090009



LOTIS 86 IP55 FOR LED GE

ACCESSORIES

GYPKIT

12290230	GYPKIT 190X190 - Ø80
----------	----------------------

CONBOX

10889830	CONBOX 190X192X130X256
----------	------------------------

M-LED

14061105	M-LED 50 4000K FLOOD GE ALU
14060905	M-LED 50 4000K SPOT GE ALU
14060805	M-LED 50 3500K FLOOD GE ALU
14060705	M-LED 50 3500K MEDIUM GE ALU
14060605	M-LED 50 3500K SPOT GE ALU
14061005	M-LED 50 4000K MEDIUM GE ALU
14060505	M-LED 50 3000K FLOOD GE ALU
14060405	M-LED 50 3000K MEDIUM GE ALU
14060305	M-LED 50 3000K SPOT GE ALU
14060205	M-LED 50 2700K FLOOD GE ALU
14060105	M-LED 50 2700K MEDIUM GE ALU
14060005	M-LED 50 2700K SPOT GE ALU

HUE-DEVICE

70000615	PHILIPS HUE TAP SWITCH
70000847	PHILIPS HUE SENSOR
70000614	PHILIPS HUE DIMMER SWITCH

HUE-BRIDGE

70000617	PHILIPS HUE BRIDGE UK
70000616	PHILIPS HUE BRIDGE EU

HUE-MODULE

13190030	MODULAR CONNECTED 1-10V WHITE COMPONENT
----------	---

