

K77 ADJUSTABLE



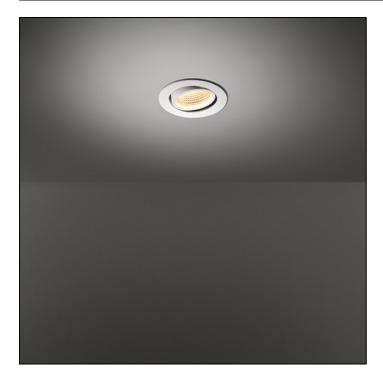

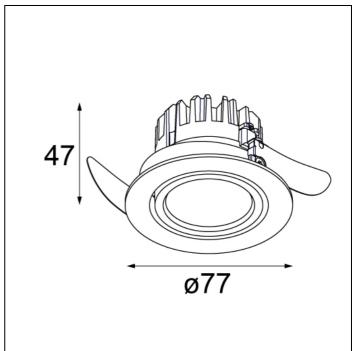

K77 ADJUSTABLE LED TRE DIM RG

K77 was developed as an extension to K72. With the LED dedicated rework of the K $\stackrel{\cdot}{\text{we}}$ honour an icon. A timeless, adjustable spot for general/accent lighting product that will remain in the Modular portfolio for many years to come. Just like its K72 counterpart, K77 is available in donkey grey and white structure.

PECIFICATIONS	
Lamp	1x LED Array 9.2W
Gear / Transfo	LED gear incl.
Cut-out size	ø 70 h 60
Weight	0.31kg
Min. Distance	0.1
Power supply	230V
IP	IP20
Glow Wire Test	960°
CRI	90
Lumen	711 Lm
Efficacy	59 Lm/W
UGR	20
Adjustability	h 360° v -30°/+30°
Remark	! 3500K on request
This luminaire contains built-in LED lamps. AT A B B B B B B B B B B B B B B B B B B	This label is available in other languages: http://supermodular.com/assets/TYPE2.pdf

		/ARM WHIT 00K / CRI 9	_	-	/ARM WHITE 00K / CRI 90+		NEUTRAL WHITE 4000K / CRI 90+		
	SPOT 15°	MEDIUM 25°	FLOOD 40°	SPOT 15°	MEDIUM 25°	FLOOD 40°	SPOT 15°	MEDIUM 25°	FLOOD 40°
black struc	14051032	14051132	14051232	14051332	14051432	14051532	14051632	14051732	14051832
donkey grey struc	14051071	14051171	14051271	14051371	14051471	14051571	14051671	14051771	14051871
white struc	14051009	14051109	14051209	14051309	14051409	14051509	14051609	14051709	14051809











Modular reserves the right to alter material, dimensions and characteristics without prior notice. Lighting technology changes rapidly. Latest datasheet and documentation available on www.supermodular.com.

19/12/2017 - ©2017 Modular Lighting Instruments

K77 ADJUSTABLE



K77 ADJU	STABLE LED TRE DIM RG	
ACCESSORIE		
CONBOX		
10889830	CONBOX 190X192X130X256	
GYPKIT		
12290130	GYPKIT 190X190 - Ø70	
	1	