


Sento terra datasheet

LED floor luminaire, connection via power supply unit (converter) with wall plug. Modular LED head-body-system allows free combination of different surfaces of head, body and base. Removable head for configuration and maintenance purposes, LED changeable. Heads available with one sided or double sided light output, power of light source 18W or 26W.

Lighting effect changeable by using optional inserts, dichroic color filters can be added. Adjustment via heat-decoupled carbon pin (fixation of head against rotation optional). Switch- and dimmable via controller operated by foot or via »touchless control« with gestures at the head.


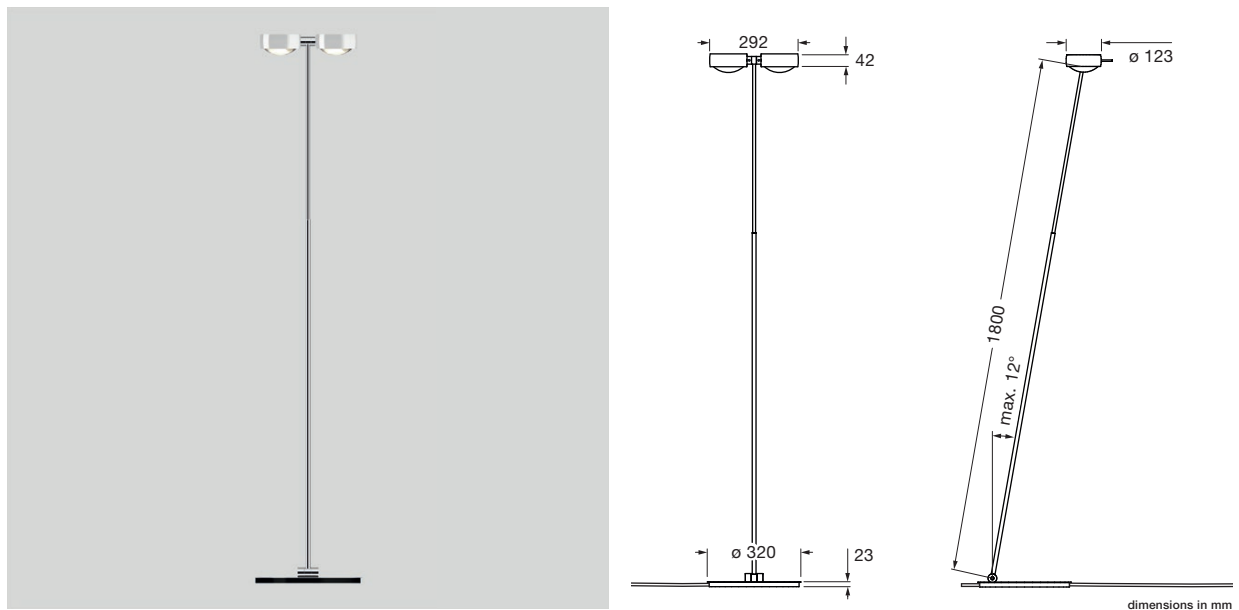


technical data Sento terra

properties	material	aluminium, steel chrome-plated, painted or anodised, plastic, glass, optical plastic
	length	1800 mm
	swivel range, rotation head	max. 12°, 360°
	weight	13.6 kg
surface	head	matt gold, rose gold, bronze, shiny chrome, matt chrome, glossy white, matt white, matt black, phantom, black phantom
	body	matt white, matt black, shiny chrome, matt chrome
	base	shiny chrome, glossy white, matt chrome, matt white, matt black
	cable	matt black, transparent
Occhio LED	average life time	> 50.000 hrs
	energy efficiency class (luminous efficiency)	G (head single sided 62 lm/W, head double sided 69 lm/W)
	power	LED 26 W (incl. Occhio power supply unit approx. 30 W, standby < 0.5 W) / LED 18 W (incl. Occhio power supply unit approx. 22 W, standby < 0.5 W)
	color rendering index	perfect color; CRI Ra 97 high flux; CRI Ra 85
	color temperature (color consistency)	2700, 3000 K (2-step) 3000, 3500, 4000 K (2-step)
electricity	dimming	»touchless control« and Occhio air (optional) or controller
	power supply unit	controller with integrated converter, cable length 180 cm, for use with 230 V AC
	power factor power supply (cos φ1)	0.9
	flicker / stroboscopic effect	1 (PstLM) / 0.9 (SVM)
	permitted operating conditions	max. 30°C for indoor use only

Sento terra lighting effects

 head single sided

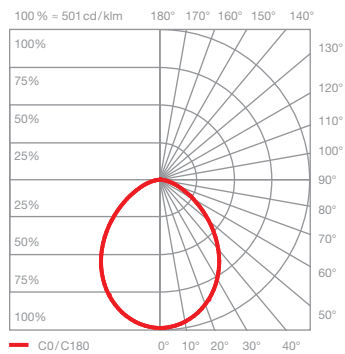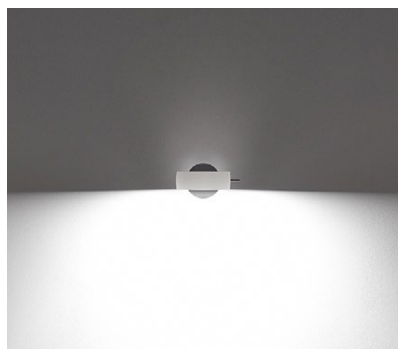


Sento B

diffuse light

insert: diffusor glass

luminous flux:

perfect color	26 W	1370lm
high flux	26 W	1870lm
perfect color	18 W	1000lm
high flux	18 W	1370lm

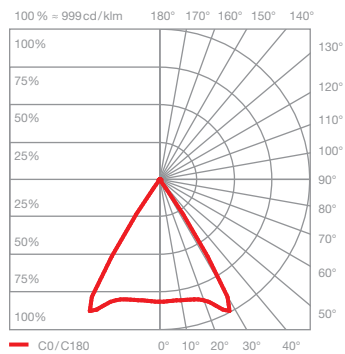



Sento C

directed light
beam angle approx. 80°

insert: lens

luminous flux:

perfect color	26 W	1570lm
high flux	26 W	2150lm
perfect color	18 W	1140lm
high flux	18 W	1570lm

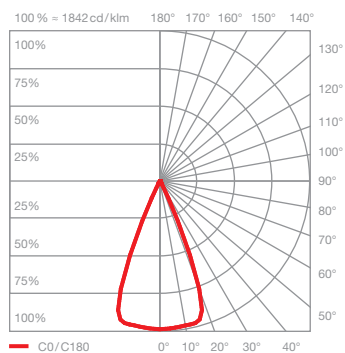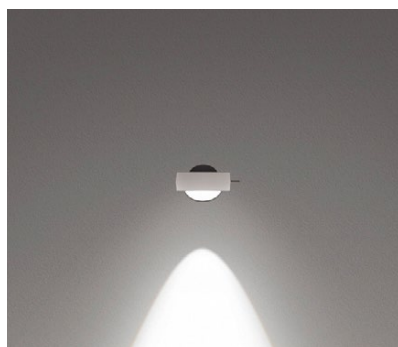


Sento S40

directed light
beam angle approx. 40°

insert: spot lens, lens
soft edge glass

luminous flux:

perfect color	26 W	1560lm
high flux	26 W	2130lm
perfect color	18 W	1130lm
high flux	18 W	1560lm

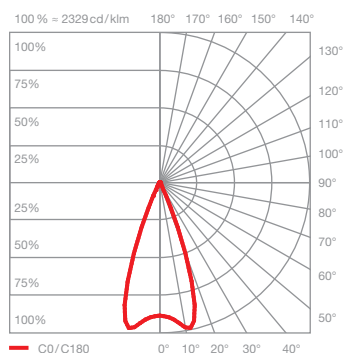

Sento S30

directed light
beam angle approx. 30°


insert: spot lens, lens
fresnel lens

luminous flux:

perfect color	26 W	1530lm
high flux	26 W	2080lm
perfect color	18 W	1110lm
high flux	18 W	1530lm

Sento terra lighting effects

 head double sided

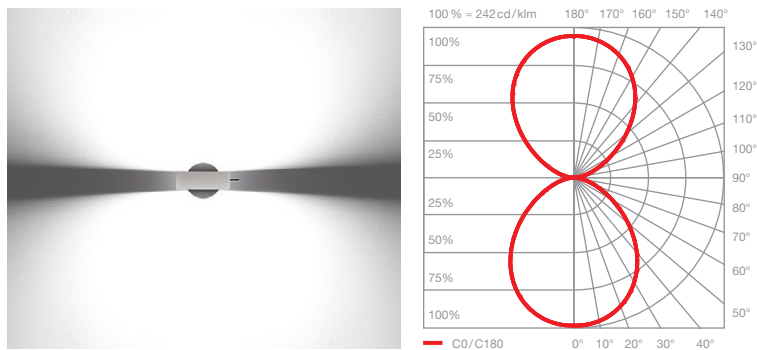


Sento A

diffuse light in both directions

insert: diffusor glass
diffusor glass

luminous flux: perfect color 26 W 1500 lm
high flux 26 W 2040 lm
perfect color 18 W 1090 lm
high flux 18 W 1500 lm

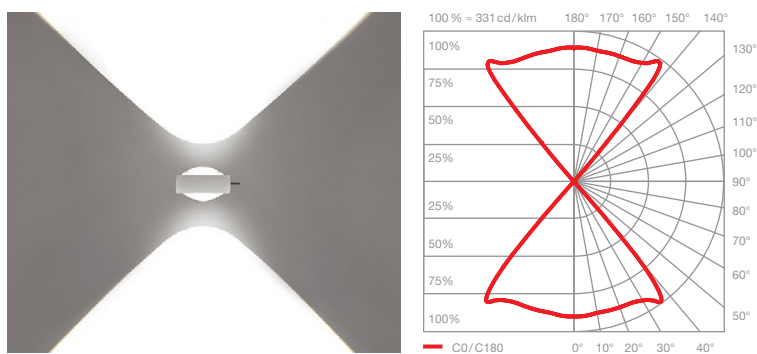


Sento D

directed light in both directions
beam angle approx. 80°

insert: lens
lens

luminous flux: perfect color 26 W 1750 lm
high flux 26 W 2390 lm
perfect color 18 W 1270 lm
high flux 18 W 1750 lm

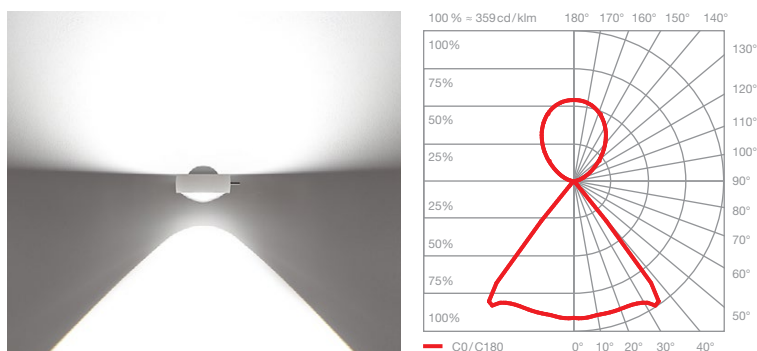

Sento E

diffuse up light
directed down light
beam angle approx. 80°

insert: diffusor glass
lens

luminous flux: perfect color 26 W 1620 lm
high flux 26 W 2200 lm
perfect color 18 W 1170 lm
high flux 18 W 1620 lm