



# Step Up Deco / Step Up Deco Black

Specification Sheet



**UL STD 1598**  
**IP67**

## LUMINAIRE FEATURES

### Design and Application

- Architectural and landscape lighting
- Large interior lobby spaces
- Recessed floor installation
- Gravel, soil or concrete installation
- UL STD 1598, IP67, Wet location, drive over rated 1500 kg (3300lb)

### Performance

- IK10, Tempered glass, crystal clear
- Continuous run of standard lengths
- Stainless steel type AISI 304 body
- Snap in installation with no exposed hardware
- Galvanic current protection (installation housing)
- Lifetime TM-21 @85C L90(9K)=54400h
- Supplied with oil and water resistant feed cable with a length that matches the length of a fixture
- CRI: > 85
- 2 Step MacAdam

### Safety

- Remote power supply
- Low voltage operation
- Recessed installation

### Optimal fixture postioning

- Max. 50mm (2") between fixtures for continous light effect

### Sustainability

- Recyclable material

### Installation housing


- LIN324 - 324mm (12,8")
- LIN624 - 624mm (24,6")
- LIN1224 - 1224mm (48,2")

### Accessories

- 200885 - Removal tool

### Power supplies

- List of proposed power supplies that are to be ordered separately.
- Click [here](#) for list of available drivers.
- Click [here](#) for voltage drop and distances.

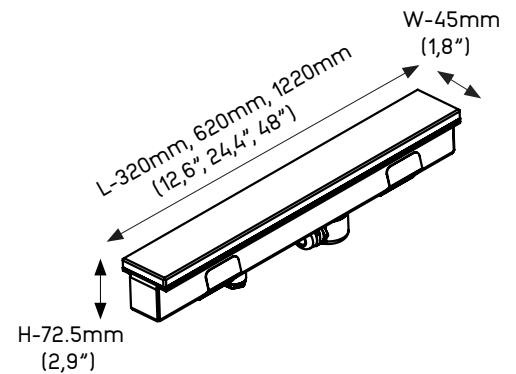

Click [here](#) to download fixture installation manual.  
Click [here](#) to download housing installation manual.  
Click [here](#) to download CAD file.  
Click [here](#) to download IES-LTD data.



# Step Up Deco

## ORDERING INFORMATION

### MODEL

**SD**

- SD - Step Up Deco

**SDB**

- SDB - Step Up Deco Black

### LENGTH

**320**

- 320mm (12.6")

**620**

- 620mm (24.4")

**1220**

- 1220mm (48")

### POWER

**H**

- H - 39W/m, 2700K - 3000K, 3150lm/m
- H - 39W/m, RGBW (W 3000K)

### COLOR TEMP.

**27**

- 27 - 2700K

**30**

- 30 - 3000K

**RGBW**

- RGBW (W 3000K)

### OPTICS

**SP**

- SP - Spot - 13°

**FL**

- FL - Flood - 31°

**GR**

- GR - Graze - 14° x 40°

**SX**

- SX - Spot - 13° + hex

**FX**

- FX - Flood - 31° + hex

**GX**

- GX - Graze - 14° x 40° + hex

### VOLTAGE

**24**

- 24 - 24 VDC fixture voltage

### OPTIONS

**3**

- 3 - luminaire supplied with 3m (10') feed cable

**6**

- 6 - luminaire supplied with 6m (20') feed cable

**9**


- 9 - luminaire supplied with 9m (30') feed cable



## Step Up Deco

### INSTALLATION DETAILS

Installation housing - LIN324 / LIN624 / LIN1224

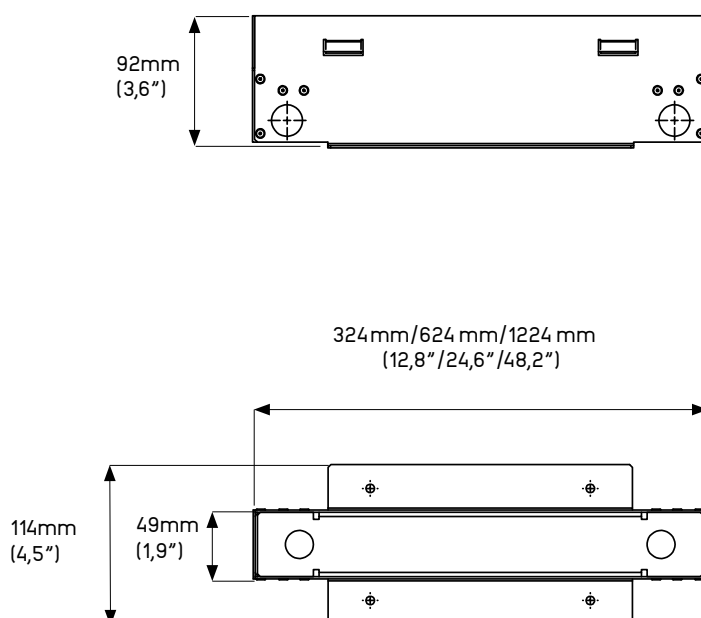

Note:  
For details on specific depths, tiling thickness and other please refer to both Installation instructions for fixture and housing.