



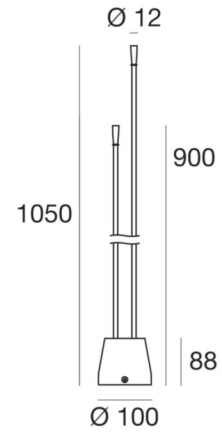

Bollard & Pole | 2 x powerLED 3 W 450 mA | CRI 80
61160W00

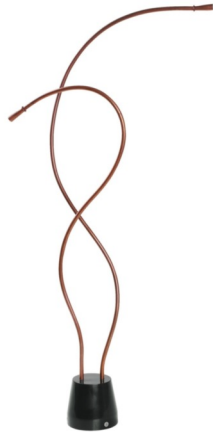

Technical data	
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Optics	General Lighting
Power	3 W
Luminous flux (source)	328 lm
Frequency	50 - 60 - Hz
CCT / Tonalità	3000 K
Colour rendering index	80 Ra
AC / DC	AC-DC
Safety class	2
IP	IP65
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Driver included	Yes
Induzione	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Net weight	0.606 Kg

Finishing casing	
Material	copper
Processing	burnishing



Bollard & Pole | 2 x powerLED 3 W 450 mA | CRI 80
61160W00

Double emission bollard & pole for outdoor application. The warm white LED light source with a general lighting light distribution is composed of 2 powerLED LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 328 lm, with a 109.3 lm/W nominal luminous efficacy.

The device body is made of copper, processed by means of burnishing. The ingress protection degree is IP65; the total weight is of 0.606 kg. The power supply driver is included in the delivery.

The total absorbed power is 3 W.


The device features protection class II and can be floor-mounted.

Illuminotechnical Features

Luminous flux (source)	328 lm
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra



Cu-Flex_2 | Bollard & Pole | Accessories
61160W00



Pegs

Code
14931