




Bollard & Pole | 100-240 V | 3 x powerLED 4.5 W 450 mA | CRI 80
61170N00

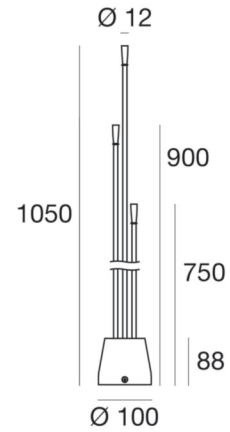

Technical data	
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Optics	General Lighting
Power	4.5 W
Frequency	50 - 60 - Hz
CCT / Tonalità	4000 K
Colour rendering index	80 Ra
AC / DC	AC
Safety class	2
IP	IP65
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Operating temperature	-40°C / +125°C
Driver included	Yes
Induzione	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Net weight	0.776 Kg

Finishing casing	
Material	copper
Processing	burnishing



Bollard & Pole | 100-240 V | 3 x powerLED 4.5 W 450 mA | CRI 80
61170N00

Multiple emission bollard & pole for outdoor application. The natural white LED light source with a general lighting light distribution is composed of 3 powerLED LEDs with CCT of 4000 K and a CRI 80.

The device body is made of copper, processed by means of burnishing. The ingress protection degree is IP65; the total weight is of 0.776 kg. The power supply driver is included in the delivery.


The total absorbed power is 4.5 W.

The device features protection class II and can be floor-mounted.

Illuminotechnical Features	
Colour temperature	4000 K
Colour rendering index	80 Ra



Cu-Flex_3 | Bollard & Pole | Accessories
61170N00



Pegs

Code
14931