



# Cu-Flex\_6 bright

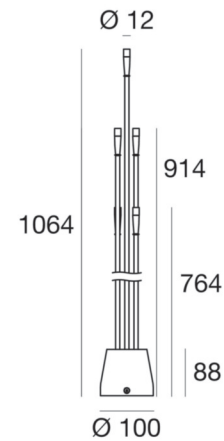

Bollard & Pole | 180-300 V | 6 x powerLED 9 W 500 mA | CRI 80  
**61181W00**

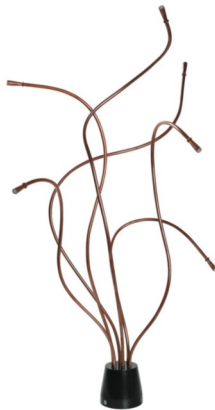

Technical data	
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Optics	General Lighting
Power	9 W
Luminous flux (source)	1080 lm
Frequency	50 - 60 Hz
CCT / Tonalità	3000 K
Colour rendering index	80 Ra
AC / DC	AC-DC
Safety class	2
IP	IP65
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Driver included	Yes
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Net weight	1.276 Kg

Finishing casing	
Material	copper
Processing	burnishing

Finishing diffuser	
Material	PMMA
Colour	sandblasted

# Cu-Flex\_6 bright



Bollard & Pole | 180-300 V | 6 x powerLED 9 W 500 mA | CRI 80  
**61181W00**

Multiple emission bollard & pole for outdoor application. The warm white LED light source with a general lighting light distribution is composed of 6 powerLED LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 1080 lm, with a 120.0 lm/W nominal luminous efficacy.

The device body is made of copper, processed by means of burnishing; the diffuser is made of pmma. The ingress protection degree is IP65; the total weight is of 1.276 kg. The power supply driver is included in the delivery.

The total absorbed power is 9 W.


The device features protection class II and can be floor-mounted.

## Illuminotechnical Features

Luminous flux (source)	1080 lm
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra



Cu-Flex\_6 bright | Bollard & Pole | Accessories  
**61181W00**



Pegs

**Code**  
14931