


MECANO T600 ON-OFF 220V


ver. 20200404_Rev_0

year: 2014
code: 1550401E06603
type: table lamp
application: indoor

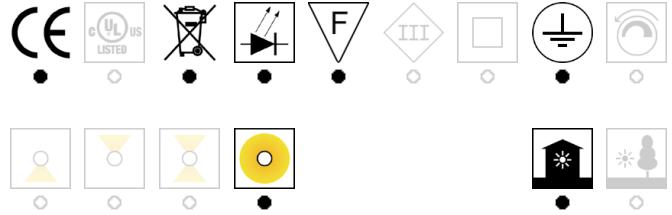

Technical drawing

Size ref. image mm - inch

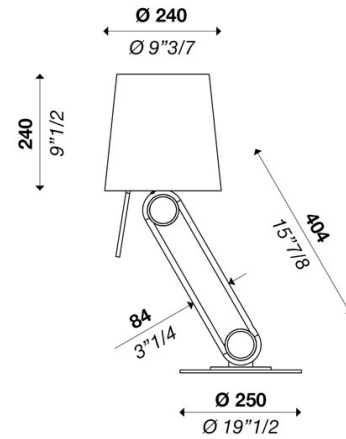

| Technical data | |
|--|----------------|
| Light source | LED bulb |
| Circuit structure | LED bulb |
| Light emission direction | diffused |
| Power | 1x MAX 20W E27 |
| Source lumens | - |
| Source efficacy | - |
| Energy class | A |
| Delivered lumens | - |
| Secondary | - |
| Colour temperature | - |
| Colour rendering index | - |
| Standard Deviation of Colour Matching | - |
| Safety class | I |
| Degree of protection | IP 20 |
| Direct mounting on normally flammable surfaces | ● |
| Operating temperature | +10° / +40° |
| CE | ● |
| UL | ○ |

| Optional | |
|----------------|---|
| Emergency mode | ○ |
| Motion sensor | ○ |
| Directional | ● |

| Packing | |
|-------------|--|
| Net weight | |
| Packaging 1 | |
| Packaging 2 | |
| Packaging 3 | |
| Packaging 4 | |
| Packaging 5 | |

| Structure | |
|-----------|----------|
| Material | steel |
| Finish | gunmetal |

| Diffuser | |
|----------|--|
| Material | |
| Finish | |

| Lampshade | |
|-----------|---------------------------------------|
| Material | fabric + polycarbonate |
| Finish | black outside / white inside variants |

page 2

| Electronics / Driver | |
|----------------------|-------------------|
| Included | No |
| Quantity | |
| Voltage | 220-240V 50/60 Hz |

| Dimmable | |
|-----------|---|
| ON/OFF | ● |
| PUSH | ○ |
| 0-10V | ○ |
| 1-10V | ○ |
| CUT PHASE | ○ |
| Bluetooth | ○ |
| DALI | ○ |

| Hanging cables | |
|---|---|
| Stainless steel cables standard length (custom available) | ○ |
| Electric cable standard length (custom available) | - |

| Warranty | |
|----------|---------|
| Duration | 2 years |




MECANO T600 ON-OFF 220V

ver. 20200404_Rev_0

year: **2014**
code: **1550401E06603**
type: **table lamp**
application: **indoor**

Available variants

Colour temperature



| | | | | | |
|---|---|---|---|---|---|
| 2700 k | 3000 k | 3500 k | 4000 k | bulb | custom |
|  |  |  |  |  |  |
| <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input checked="" type="radio"/> | <input type="radio"/> |

Colour rendering index





custom

| |
|---|
|  |
| <input checked="" type="radio"/> |





Structure finish

| | |
|---|---|
| gunmetal | custom |
|  |  |
| <input type="radio"/> | <input checked="" type="radio"/> |

Secondary finish

| | | | |
|---|---|---|---|
| white | black | grey | ivory |
|  |  |  |  |
| <input type="radio"/> | <input checked="" type="radio"/> | <input type="radio"/> | <input type="radio"/> |

Diffuser / Optical

| | | | |
|---|---|---|---|
| opal | opal prismatic | transparent | custom |
|  |  |  |  |
| <input checked="" type="radio"/> | <input type="radio"/> | <input type="radio"/> | <input type="radio"/> |