



VITREO S1500 HORIZONTAL 0-10V 110V

ver. 20200404_Rev_0

year: **2022**
code: **2800302A20000**
type: **hanging lamp**
application: **indoor**

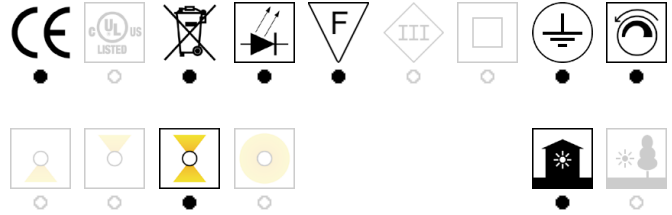

Technical drawing
Size ref. image mm - inch

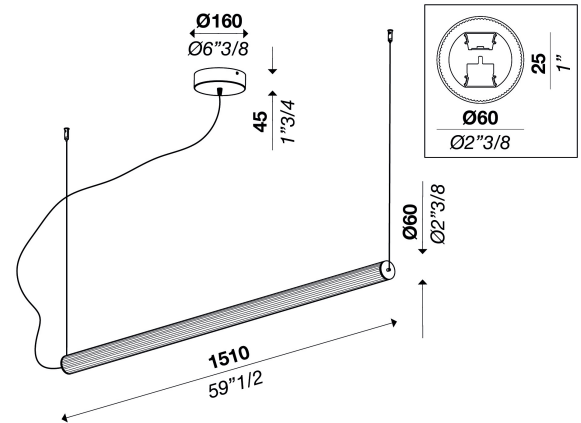

Technical data	
Light source	LED
Circuit structure	LED strip
Light emission direction	direct and indirect
Power	29 W
Source lumens	3500 lm
Source efficacy	121 lm/W
Energy class	D
Delivered lumens	
Secondary	24 V
Colour temperature	3000 K / variants page 2
Colour rendering index	80 CRI / variants page 2
Standard Deviation of Colour Matching	3 SDCM
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°
CE	●
UL	○

Optional	
Emergency mode	○
Motion sensor	○
Directional	○

Packing	
Net weight	
Packaging 1	
Packaging 2	
Packaging 3	
Packaging 4	
Packaging 5	

Structure	
Material	aluminium
Finish	white / variants page 2

Diffuser	
Material	glass
Finish	transparent/ variants page 2

Electronics / Driver	
Included	Yes
Quantity	1
Voltage	100-277V 50/60 Hz

Dimmable	
ON/OFF	○
PUSH	○
0-10V	●
1-10V	○
CUT PHASE	○
Bluetooth	○
DALI	○

Hanging cables	
Stainless steel cables standard length (custom available)	2000 mm / 78" 3/4
Electric cable standard length (custom available)	2500 mm/100"

Warranty	
Duration	2 years

VITREO S1500 HORIZONTAL 0-10V 110V

ver. 20200404_Rev_0

year: **2022**
code: **2800302A20000**
type: **hanging lamp**
application: **indoor**

Available variants

Colour temperature

2700 k 3000 k 4000 k custom



Colour rendering index

CRI 80 CRI 90 CRI 95 custom



Structure finish

gold / brass matt white matt black polished custom



Diffuser / Optical

opal transparent custom



Ceiling Mount

perpendicular conical remote driver custom

