

TECHNICAL INFORMATION

FLOODLIGHT PADELITE

320W 5000K


Série profissional de projetores desportivos IP66, corpo em alumínio fundido de alta intensidade.
Professional series of IP66 sports floodlights, body of high intensity die-cast aluminum.
Serie profesional de proyectores deportivos IP66, cuerpo de aluminio fundido de alta intensidad.




ILAR-02312

GENERAL DATA		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Reference	ILAR-02312	Size Piece	1325x185x149mm	Total Luminous Flux	54300lm
Led Type	5050	Luminaire Net Weight	7,6±0,5kg	Luminous Efficacy	170 lm/W
Lens Material	PC Optical Lens			Beam Angle	Assymetric
Body Material	Die Cast Aluminium			Colour Temperature	5000K
Body Colour	Grey (RAL870)			Colour Rendering Index	≥80
Nominal Lifetime	100000H (L90B10)				
Dimmable	Optional (DALI/1-10V)				
Fixation	Bracket				
	Pole Mounting (need acessory)				
ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	320W	Type of Protection	IP66	2014/30/EU (EMC Directive)	YES
Nominal Voltage	AC120-240V	Protection Class IK (shock resistance)	IK10	2014/35/EU (LVD Directive)	YES
Operating Frequency	50/60Hz			ROHS	YES
Power Factor	>0,95			CE	YES
Operating Temperature	-30° C to + 50° C			Warranty	5 YEARS
Eletrical Class	Class I				
Surge Protection	20KV				

SIZE

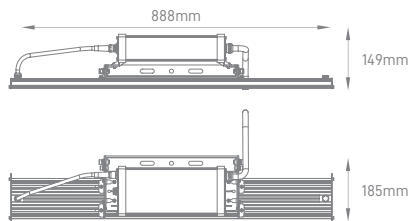

BEAM ANGLE



Designed by Aronlight in Portugal. Made in PRC

