

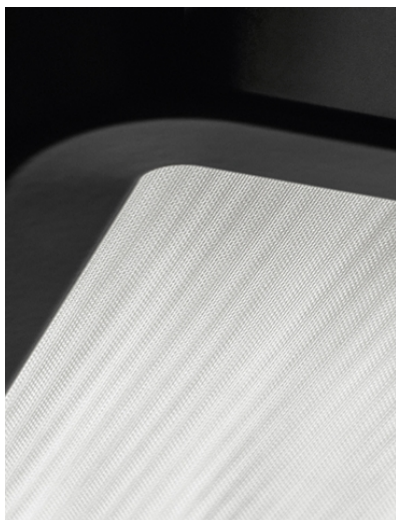




Type	KRO10-12-8040-TD	KRO10-12-8040-TD
Order No	KRO10-12-8040-TD	
Lamp type/assembly	Standing light	
Version	Symmetrical light distribution	
Colour	White	
Light source	LED, 4000 K, 5900 lm, CRI > 80	
Operating mode	Dimmable	
Operation	On tube	
Ballast (number)	Driver (1), integrated integrated in lamp base	
Lamp head	Aluminium, die-cast	
Diffuser	PMMA	
Tube	Aluminium, extruded	
Base	Zamak	
Finish	White NCS S 1002-Y50R, powder-coated	
Power cable	Black, 3x0.75mm ² , L 3000 mm	
Mains plug	Swiss plug type J	
Light distribution	Direct (44%) / indirect (56%)	
UGR	< 12	
Power consumption	93 W	
Luminaire efficacy	100%	
Mains voltage	220-240V, 50/60Hz	
Stand-by consumption	< 0.5 W	
Safety class	I	
Protection type	IP 20	
Packaging units	1 (1960 x 600 x 600 mm)	
Weight	16 kg	
Guarantee	36 months	



Belux AG

Neufeldweg 6, CH-5103 Möriken
 Tel. +41 61 316 74 01
 Fax +41 61 316 75 99
www.belux.com
belux@belux.com