
# **BUTTON**

## LIGHTING | Indoor FEDERICO PERI



Button is a collection of LED wall lights conceived by Federico Peri based on a minimal and refined design project that combines, in its rounded and discreet contours, classical and contemporary inspiration. Made of satin–finished brass and ribbed glass, the wall lamps amplify LED strip lighting by reflecting light indirectly into the space. Perfect combined with each other or as stand–alone elements, Button wall lights create an atmosphere of soft, subdued lighting, perfect for illuminating rooms in the sleeping area or a relaxing living room setting.

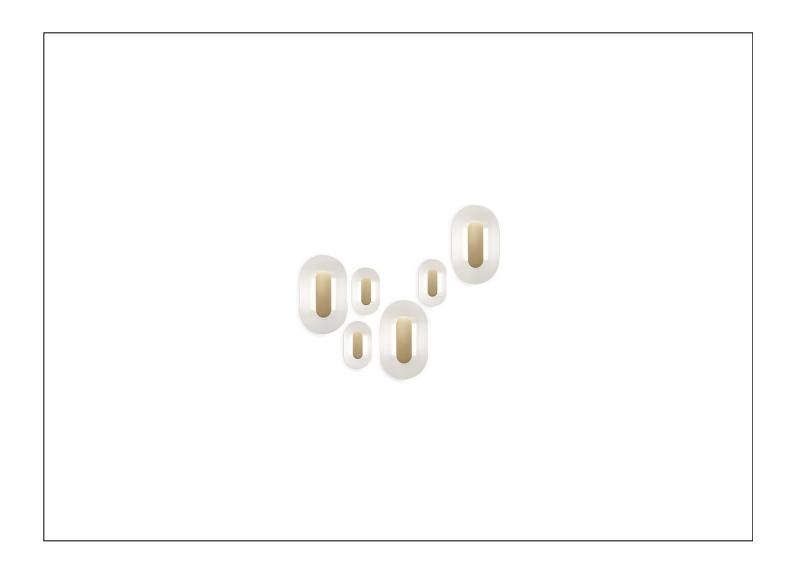

Model: assembly required.

**Structure**: satinì brass structure with transparent matt varnish.

Aluminium wired inner tube with methacrylate opaline.

Wall mounting plate in varnished metal and nylon sheaths.

Covering / Coating: 4 mm thick striped glass.

Specify the chosen dimmeration in the order.

#### **AVAILABLE FINISHES**

#### **MATERIALS**



Satin Brass

#### Wall light.

L	Р	Н	
18	10	30	cm
W	D	Н	
7	4	11.75	inch

2700K LED strip - 0.9MT - 12.5W/24V. 10W power supply. 449 lumens.

Dimming: 1–10 standard power supply already compatible.

DALI with surcharge.

PHASE CUT with surcharge.

Specify the chosen dimmeration in the order.

Wall light.

	L	Р	Н	
	30	10	50	cm
ĺ	W	D	Н	
	11.75	4	19.5	inch

2700K LED strip - 0.44MT - 12.5W/24V. 10W power supply. 951 lumens.

Dimming: 1-10 standard power supply already compatible.

DALI with surcharge.

PHASE CUT with surcharge.

### Specify the chosen dimmeration in the order.

Wall light.

L	Р	Н	
35	10	35	cm
W	D	Н	
13.75	4	13.75	inch

2700K LED strip - 0.5MT - 12.5W/24V. 10W power supply. 510 lumens.

Dimming: 1-10 standard power supply already compatible.

DALI with surcharge.

PHASE CUT with surcharge.

## Specify the chosen dimmeration in the order.

Wall light.

Ш	Р	Н	
50	10	50	cm
W	D	Н	
19.5	4	19.5	inch

2700K LED strip - 0.5MT - 12.5W/24V. 10W power supply. 510 lumens.

Dimming: 1-10 standard power supply already compatible.

DALI with surcharge.

PHASE CUT with surcharge.

Specify the chosen dimmeration in the order.