










DAISY SERIES




 IP44	 220-240V	 5 YRS Warranty	 7-20 WATTS
Upon request			
 1-10V	 DALI	 DMX	 LOW GLARE
 UGR <19			


PHYSICAL	
Body	Die cast Aluminum
Finish	Polyester Powder Coated
OPTICAL	
Diffuser	Polycarbonate
Beam Angle	15°,24°,36°,60°,75°
ELECTRICAL	
Light source	LED CREE
CRI	>80 (>90 available on request)
CCT	3000K-4000K-6000K
Driver	Electronic included 50-60Hz 220-240VAC Non-Dimmable Driver 1-10V dimming or DALI on request
Ambient Temp.	-20°C - 45°C
Light source Life	60,000h

DAISY SERIES is an anti-glare downlight with honeycomb grill. It adopts high lumen light source, deep reflector and low glare UGR<19, which provides a comfortable visual experience. The aluminum profile provides excellent thermal dissipation and ensures a long lifespan. DALI, 10-1V driver are available to provide excellent dimming effect.

It is designed for general lighting applications in offices, schools, hotels etc. It is also widely used for public areas, such as stairway, lobby, reception, corridors etc.

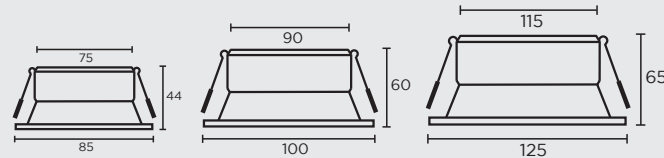

Range	Power (W)	Lumen (lm)	Dimensions (mm)	Cut-out Dimensions(mm)
DAISY 1.1	7W	616lm	Ø85xH50mm	Ø75mm
DAISY 1.2	10W	950lm	Ø100xH60mm	Ø90mm
DAISY 1.3	12W	1056lm	Ø100xH60mm	Ø90mm
DAISY 1.4	20W	2000lm	Ø125xH65mm	Ø115mm



ORDERING CODE

SERIES NAME	PRODUCT RANGE	BODY FINISH	REFLECTOR COLOR	CCT	OPTICS	CONTROL
DAISY	1.1 1.2 1.3 1.4	W WHITE B BLACK	W WHITE B BLACK	30 3000K 40 4000K 60 6000K	15 15° 24 24° 36 36° 60 60° 75 75°	1 ON-OFF 2 1-10V 3 DALI