





SOLE Led 2,5W 3000K, CRI90, rough white 24V .
Remote driver excluded.

SOLE Led 2,5W 3000K, CRI90, rough white 24V .
Remote driver excluded.




Descrizione/Description

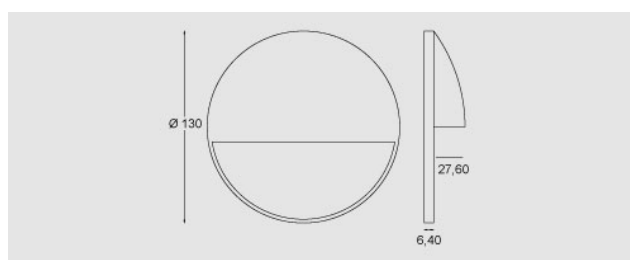

IT: Outdoor wall step markers with minimal shape and modern design. Available in two different versions, round and rectangular with grazing light beam are ideal staircases, entrances and access paths lighting. Structure in die cast aluminum, epoxy polyester powder coating. LED white light tone 4000K or 3000K, direct asymmetric emission. Power 2.5W - 24V. IP65 protection degree. Card can be fixed directly on standard 108x74mm recessed box. Driver remote excluded.

ENG: Outdoor wall step markers with minimal shape and modern design. Available in two different versions, round and rectangular with grazing light beam are ideal staircases, entrances and access paths lighting. Structure in die cast aluminum, epoxy polyester powder coating. LED white light tone 4000K or 3000K, direct asymmetric emission. Power 2.5W - 24V. IP65 protection degree. Card can be fixed directly on standard 108x74mm recessed box. Driver remote excluded.

| | |
|------------------------------|-----------------|
| Codice/Code | MTS.5428.068.32 |
| Tonalità/Light tone | 3000K |
| Potenza/Power | 2,5W |
| Fusso luminoso/Luminous flux | 01 lm - 500 lm |
| Colore/Color | Rough white |
| Driver/Driver | Driver On/Off |

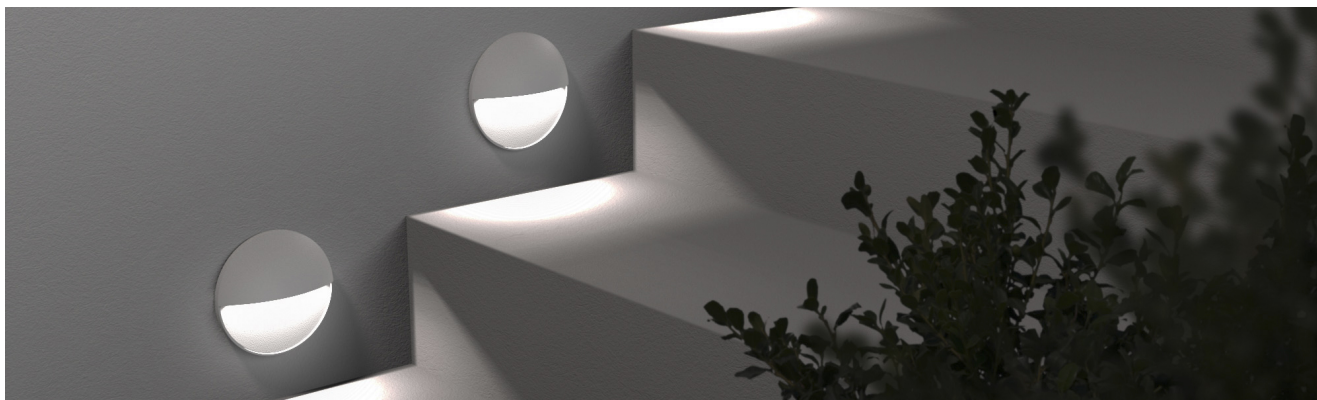

Accessori/Accessories



AAA.TRSL14.00
Driver LED 24VDC 8W IP20.

AAA.TRSL14.00
Driver LED 24VDC 8W IP20.



AAA.TRSL15.00
Driver LED 24VDC 10W IP65.

AAA.TRSL15.00
Driver LED 24VDC 10W IP65.



MTS.5428.001.00
Sole/Card Led recessed box.

MTS.5428.001.00
Sole/Card Led recessed box.