

LIGHT SOURCE

LED quantity	1
Power max	4 W
Total lumen output (3000K)	269 lm
Efficacy lm/W (3000K)	67 lm/W
LOR (3000K)	63%
CRI	>80 – >90
LED Temperature (K)	2700K – 3000K – 3000K CRI>90 – 4000K – 5000K
Average operational life	50.000 hours

OPTIC

Material	PMMA
Available optics	10° - 30° - 40° - 60° - Elliptical lens
Beam direction	Adjustable +/- 125°, Rotating +/- 355°
Flux symmetry	Symmetrical
Accessories	-

LED FIXTURE

Material	Aluminum
Finish	Aluminum Hard Coat Anodizing (Gray, Black, Titanium, Champagne Gold)
Available finishes	Gray, Black, Titanium, Champagne Gold
IP Rate	IP40
Working Temperature	-20° ÷ +40°
Accessories	Anti-glare visor



ELECTRICAL FEATURES

Driver	Remote
Dimmable	Push, 1-10V, DALI
For emergency lighting	Upon Request
Connection	In series at 350mA
Class	III

MECHANICAL FEATURES

Dimensions (mm)	16 x 54 x 300 (H adjustable)
Weight	60 gr
Mounting	Wall, Ceiling, Floor mountin
Cut-out (mm)	Ø13,5 mm
Use	Indoor

NOTES

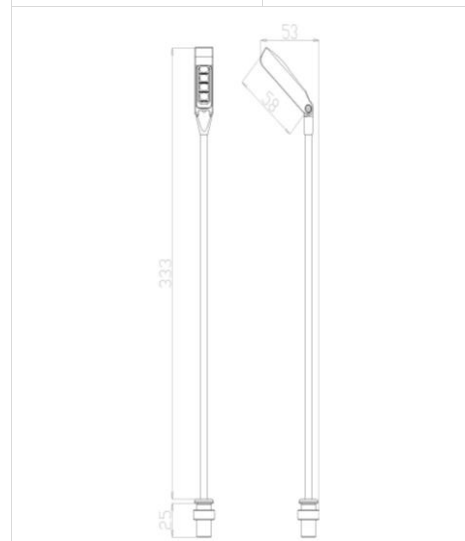

H(m)	D(m)	E _{max} (lx)	E _{av} (lx)
10°			
1.00	0.28	2002	1292
2.00	0.56	501	323
3.00	0.84	222	144
4.00	1.12	125	81
5.00	1.41	80	52